

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---




B



D



G

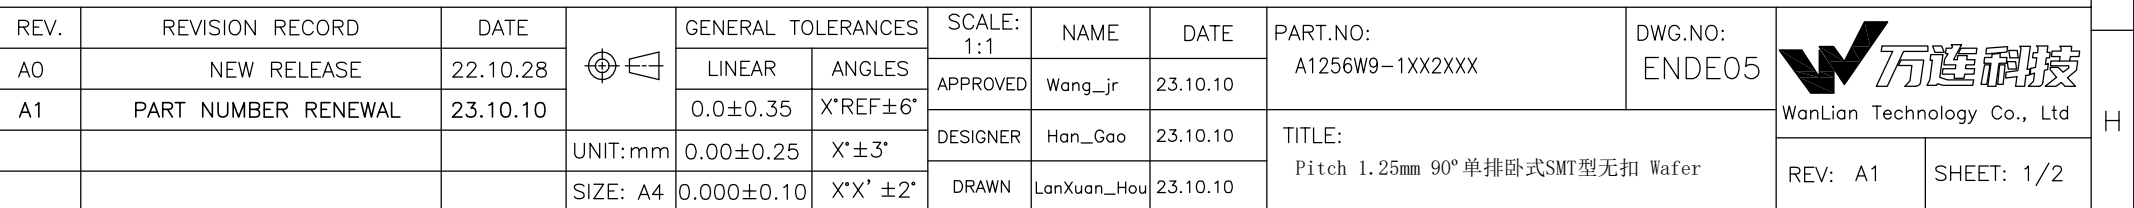

1.MATERIAL SPECIFICATION:

A

B

C

D

E

RATED VOLTAGE : 150V AC/DC

3-3.INSULATION RESISTANCE: 500MΩ Min

4.ENVIRONMENTAL PERFORMANCE:

5.PACKAGE SPEC: REEL

^

SERIES NO:—

CONNECTOR: -

9-90°

1-SINGLE RO

02~30

— COLOR:
A-BLACK
S-NATURE

— PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE Tin

—TERMPIPOINT:
2-SMT

Q. No.	Dimensions(mm)	Q. No.	Dimensions(mm)
--------	----------------	--------	----------------

Circuit	A	B	Circuit	A	B
02	1.25	7.45	11	12.50	18.70
03	2.50	8.70	12	13.75	19.95
04	3.75	9.95	13	15.00	21.20
05	5.00	11.20	14	16.25	22.45
06	6.25	12.45	15	17.50	23.70
07	7.50	13.70	20	23.75	29.95
08	8.75	14.95	21	25.00	31.20
09	10.00	16.20	25	30.00	36.20
10	11.25	17.45	30	36.25	42.45



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

