
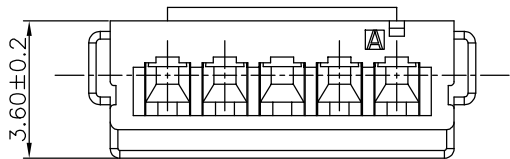
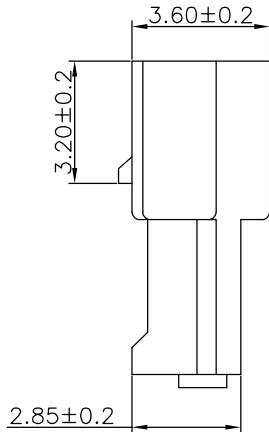
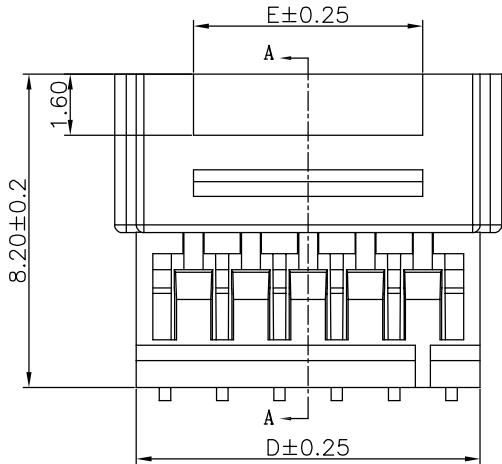
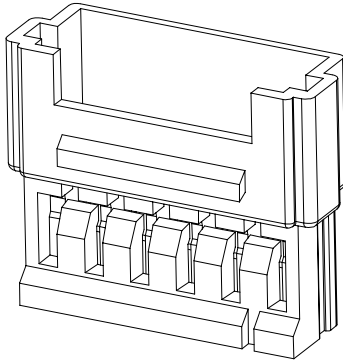


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

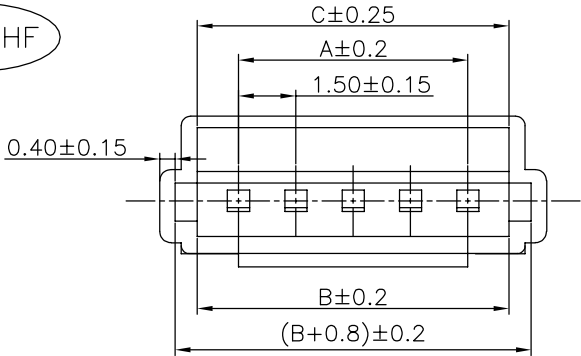

- NOTE:
- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
 - 2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 0.6KGF/PIN min
2-2.DURABILITY: 50 CYCLES.
 - 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
RATED VOLTAGE : 50V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 500MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
 - 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - 5.PACKAGE SPEC: PE BAG
 - 6.P/N:

SERIES NO: A1501 H 1 F-1 XX X X
CONNECTOR: H-HOUSING
1-TYPE CODE:1
MALE FEMALE: M-MALE F-FEMALE
ROW NO: 1-SINGLE ROW
1-NO Mark
2-With Mark
COLOR: A-BLACK K-WHITE
PIN Q'PY: 02~16

Ordering Information & Dimensions

Circuit	Dimensions(mm)					Circuit	Dimensions(mm)				
	A	B	C	D	E		A	B	C	D	E
02	1.50	4.82	3.66	4.50	3.00	10	13.50	16.82	15.66	16.50	13.50
03	3.00	6.32	5.16	6.00	3.00	11	15.00	18.32	17.16	18.00	15.00
04	4.50	7.82	6.66	7.50	4.50	12	16.50	19.82	18.66	19.50	16.50
05	6.00	9.32	8.16	9.00	6.00	13	18.00	21.32	20.16	21.00	18.00
06	7.50	10.82	9.66	10.50	7.50	14	19.50	22.82	21.66	22.50	19.50
07	9.00	12.32	11.16	12.00	9.00	15	21.00	24.32	23.16	24.00	21.00
08	10.50	13.82	12.66	13.50	10.50	16	22.50	25.82	24.66	25.50	22.50
09	12.00	15.32	14.16	15.00	12.00						

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1501H1F-1XXXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28			
				0.0±0.35	X°REF±6°				CHECK	XueZe_Ma	
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28			
			SIZE: A4	0.000±0.10	X°X' ±2°						