


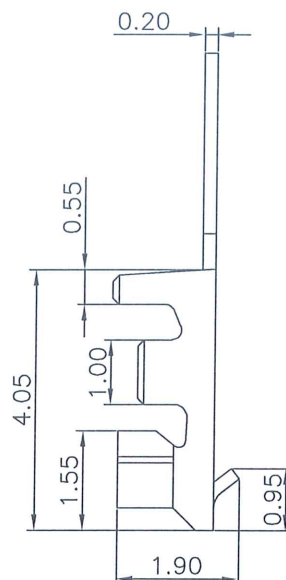


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

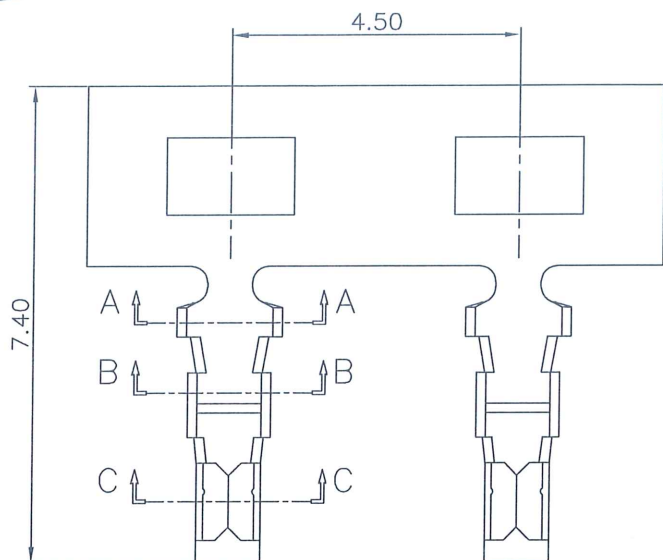

SECTION:A-A



SECTION:B-B



SECTION:C-C

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
RATED VOLTAGE : 50V
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 500MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V AC
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:

SERIES NO: A1501 T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS
F-FE



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1			A1501TFX-X	ENDE05	
A1	REPLACE THE NEW MOLD	25.08.26		0.0±0.35	X'REF±6°	APPROVED	8/8/26	25.8.26			
			UNIT:mm	0.00±0.25	X'±3°	CHECK	陈松荣	25.8.26	TITLE:		
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	黄思颖	25.08.26	Pitch1.50 mm ZII 母端子 AWG#26-#30		
										REV: A1	SHEET: 1/1