


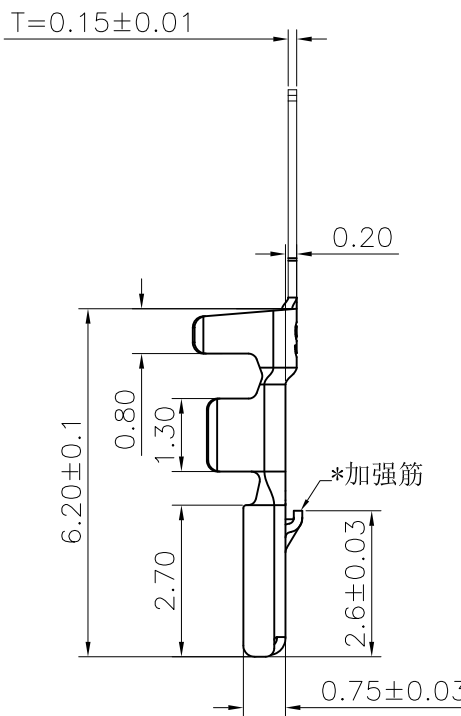


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

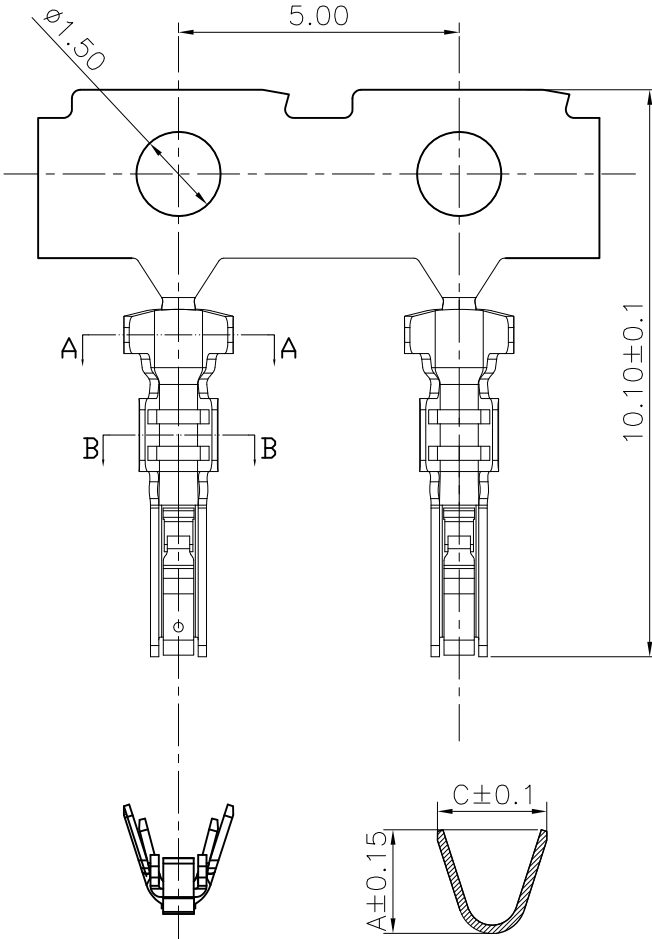


SECTION:A-A
SCALE:1:1

SECTION:B-B
SCALE:1:1

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/pin min
3-2.DURABILITY: 30 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 100V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 500MΩ Min
4-4.DIELECTRIC WITHSTANDING : 500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC: 10K/REEL
7.P/N:

SERIES NO: A1504 T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

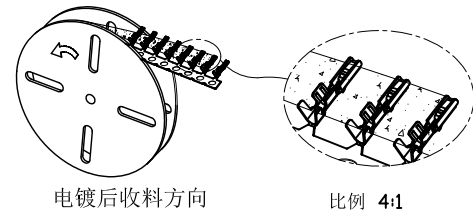

料号	高/低脚	Dimensions (mm)			
		A	B	C	D
A1504TFX-X	H-高脚	1.85	1.45	1.95	1.40

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1504TFX-X	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.08.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.08.19			
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.08.19	TITLE: Pitch1.50 mm ZE母端子 AWG#24-#28	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LX_HOU	22.08.19	REV: A0		SHEET: 1/1