

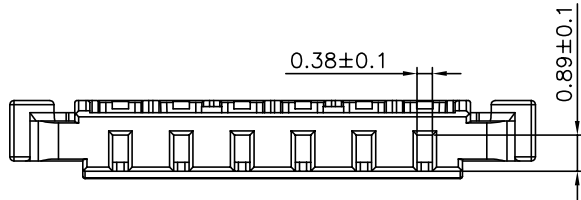
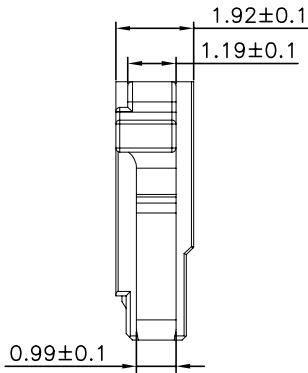
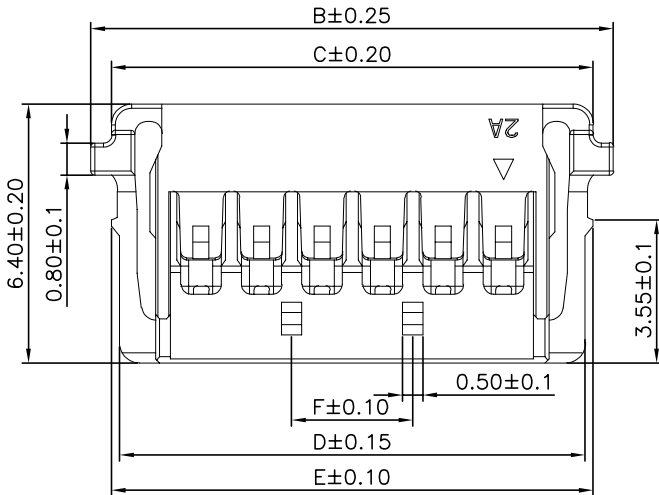
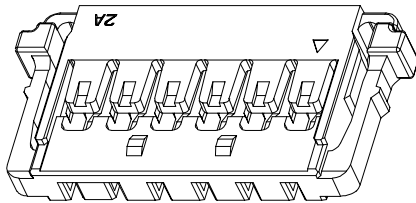


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

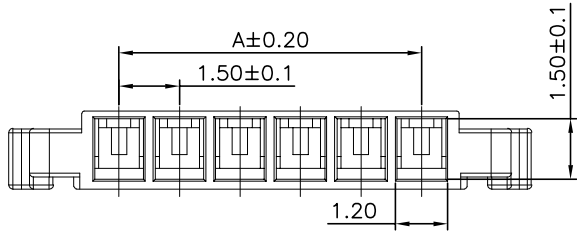

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 0.05kgf/PIN MIN
2-2.DURABILITY: 50 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
RATED VOLTAGE : 150V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000Ω Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

SERIES NO: A1505 H M-1 XX X 0
COLOR:
A-BLACK
K-WHITE
S-NATURE
CONNECTOR:
H-HOUSING
PIN Q'PY:
02~12
MALE FEMALE:
M-MALE
ROW NO:
1-SINGLE ROW

Ordering Information & Dimensions

Circuit	Dimensions(mm)					
	A	B	C	D	E	F
02	1.50	6.95	5.95	5.55	5.85	
03	3.00	8.45	7.45	7.05	7.35	
04	4.50	9.95	8.95	8.55	8.85	
05	6.00	11.45	10.45	10.05	10.35	3.00
06	7.50	12.95	11.95	11.55	11.85	3.00
07	9.00	14.45	13.45	13.05	13.35	4.50
08	10.50	15.95	14.95	14.55	14.85	6.00
09	12.00	17.45	16.45	16.05	16.35	7.50
10	13.50	18.95	17.95	17.55	17.85	9.00
11	15.00	20.45	19.45	19.05	19.35	10.50
12	16.50	21.95	20.95	20.55	20.85	12.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1505HM-1XXX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
A0	NEW RELEASE	21.10.12		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	23.07.06			
A1	"F" DIMENSIONAL CHANGE	23.07.06		0.00±0.25	X°±3°	DESIGNER	Han_Gao	23.07.06	TITLE: Pitch 1.5mm 单排带凸Housing无卤		
			UNIT:mm	0.000±0.10	X°X'±2°	DRAWN	LX_HOU	23.07.06		REV: A1	SHEET: 1/1