
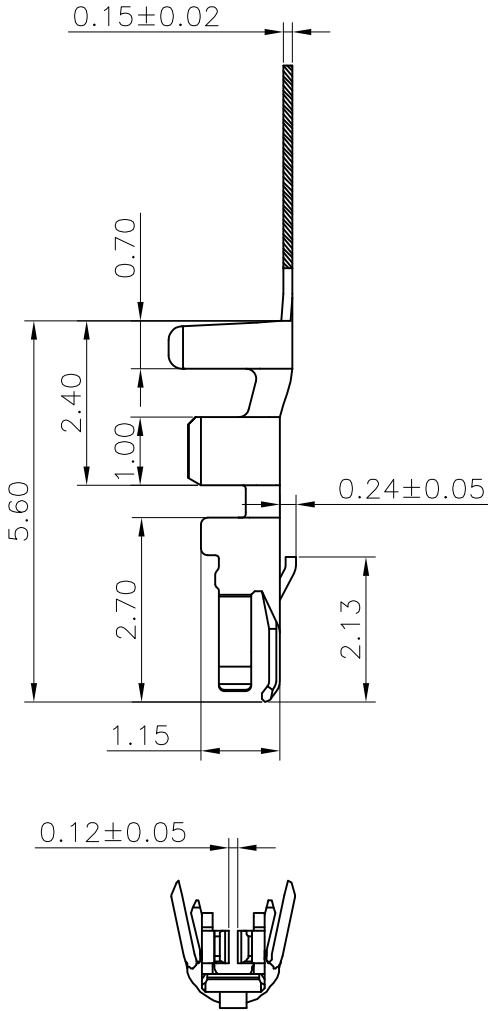


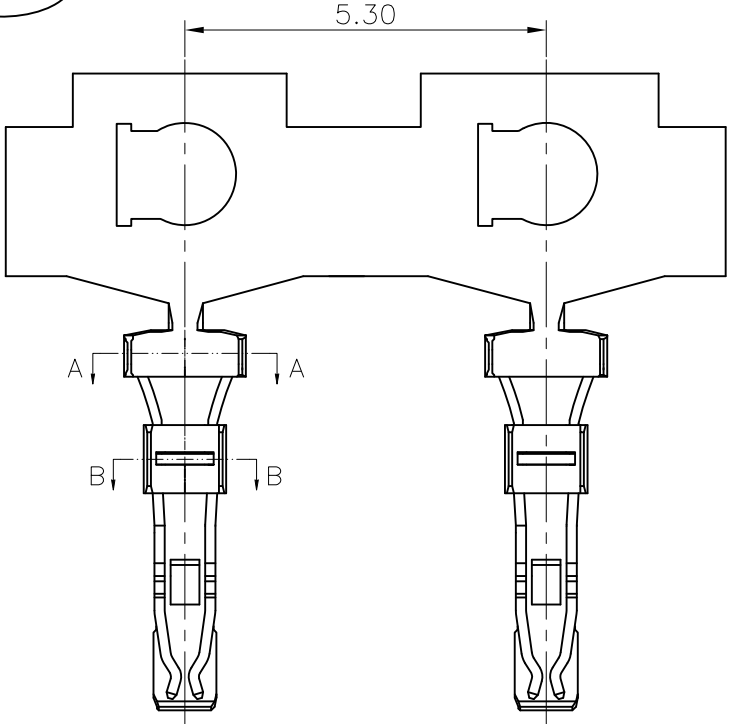


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS



NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: Phosphor Bronze
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 0.05kgf/PIN MIN
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 1A
RATED VOLTAGE : 150V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC:PAPER PLATE
7.P/N: A1505 T F X-X
SERIES NO: T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
1-ALL AU G/F
C-BRIGHT TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1505TFX-X	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12				
				0.0±0.35	X°REF±6°							
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch 1.5mm 磷铜母端子 AWG#24-#28			
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.10.12				
											REV: A0	SHEET: 1/1