


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---




B



E

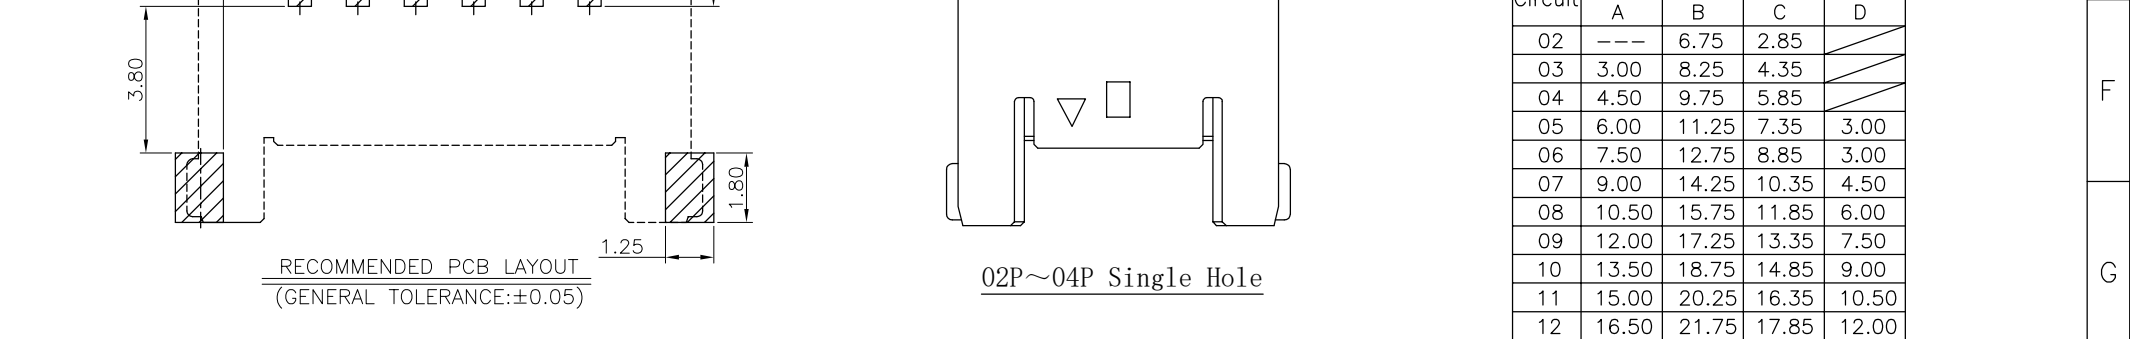

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1505W9-1XX2XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	23.8.11		LINEAR	ANGLES	APPROVED	Wang_jr	23.8.11				
				0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.8.11	TITLE: Pitch 1.5mm 90° 单排卧贴 Wafer PA4T 无卤			
				UNIT:mm	0.00±0.25	X'±3'	DRAWN	Zijun_Huang				23.8.11
				SIZE: A4	0.000±0.10	X*X' ±2°						
										REV: AO	SHEET: 1/2	



NOTE:

1-1.HOUSING: PA4T,UL94V-0

1-3.SOLDER TABS: BRASS

2-1.CONTACTS:

GOLD FLASH PLATED OVER ALL.

2-2.SOLDER TABS:

TIN PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 1A

3-2. CONTACT RESISTANCE

3-3.INSULATION RESISTANCE: 1000MΩ M

3-4.DIELECTRIC WITHSTANDING : 500V

4. ENVIRONMENTAL PERFORMANCE:

4-1. OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

5. PACKAGE SPEC: REEL

6. P/N:

U.I / N. A15

A13

SERIES NO.

SERIES NO:-

CONNECTO

W-WAFER

ANGLE:

ANGLE:
0.00°

9-90°

ROW N

1-SING

FIN. 03

PIN	Q'
00	10

02~12

$$\text{R-OHS} + \text{HF}$$

— COLOR:
A—BLACK
S—NATURE

— PLATING:
A—ALL AU G/F
C—BRIGHE TIN
D—MATTE Tin

—TERMIPOINT:
2-SMT


Ordering Information & Dimensions

Circuit	Dimensions(mm)			
	A	B	C	D
02	---	6.75	2.85	
03	3.00	8.25	4.35	
04	4.50	9.75	5.85	
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	4.50
08	10.50	15.75	11.85	6.00
09	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1505W9-1XX2XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	23.8.11		LINEAR	ANGLES	APPROVED	Wang_jr	23.8.11			
				0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.8.11	TITLE: Pitch 1.5mm 90° 单排卧贴 Wafer PA4T 无卤		
				UNIT:mm	0.00±0.25	X*±3°	DRAWN	Zijun_Huang		23.8.11	
				SIZE: A4	0.000±0.10	X*X' ±2°					

 万连科技
WanLian Technology Co., Ltd.

REV: A0	SHEET: 1/2
---------	------------

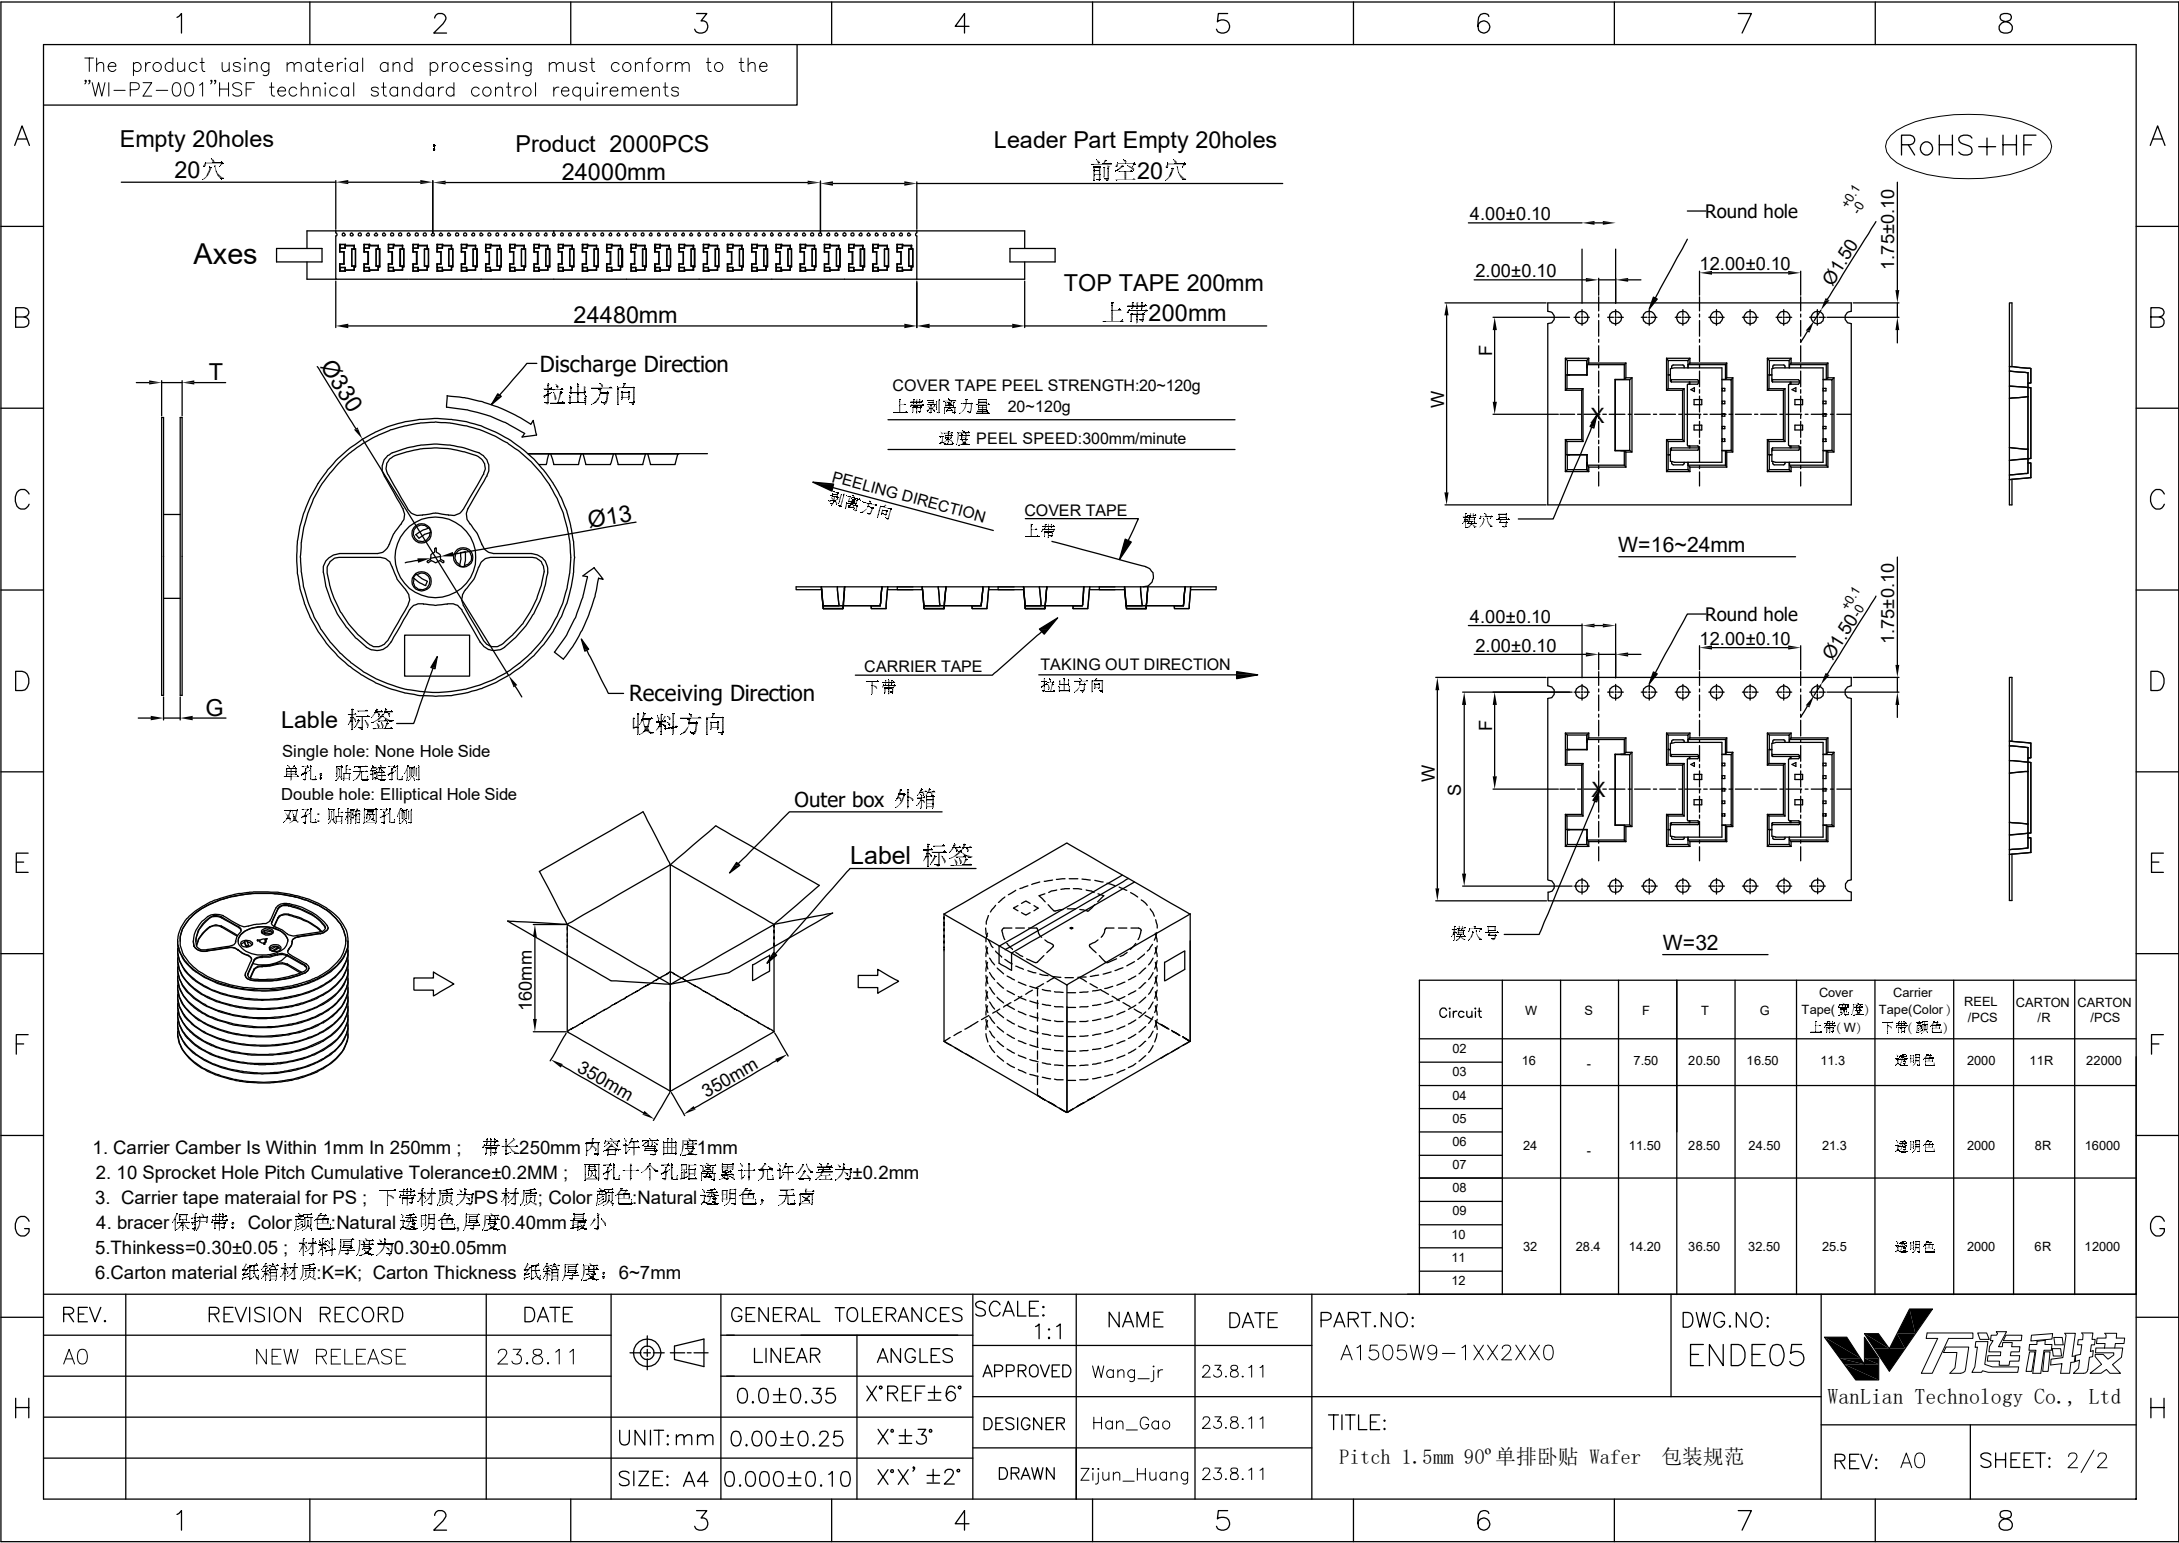

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

Empty 20holes 20穴, Product 2000PCS 24000mm, Leader Part Empty 20holes 前空20穴

Axes

TOP TAPE 200mm 上带200mm

Product 2000PCS 24000mm

24480mm

Discharge Direction 拉出方向

COVER TAPE PEEL STRENGTH:20~120g 上带剥离力量 20~120g 速度 PEEL SPEED:300mm/minute

PEELING DIRECTION 剥离方向

COVER TAPE 上带

CARRIER TAPE 下带

TAKING OUT DIRECTION 拉出方向

Receiving Direction 收料方向

Lable 标签

Single hole: None Hole Side 单孔: 贴无链孔侧 Double hole: Elliptical Hole Side 双孔: 贴椭圆孔侧

Outer box 外箱

Label 标签

- Carrier Camber Is Within 1mm In 250mm; 带长250mm 内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM; 圆孔十个孔距离累计允许公差为±0.2mm
- Carrier tape materiai for PS; 下带材质为PS材质; Color 颜色:Natural 透明色, 无卤
- bracer 保护带: Color 颜色:Natural 透明色, 厚度0.40mm 最小
- Thinness=0.30±0.05; 材料厚度为0.30±0.05mm
- Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

Circuit	W	S	F	T	G	Cover Tape(宽度) 上带(W)	Carrier Tape(Color) 下带(颜色)	REEL /PCS	CARTON /R	CARTON /PCS
02	16	-	7.50	20.50	16.50	11.3	透明色	2000	11R	22000
03										
04										
05										
06	24	-	11.50	28.50	24.50	21.3	透明色	2000	8R	16000
07										
08										
09										
10	32	28.4	14.20	36.50	32.50	25.5	透明色	2000	6R	12000
11										
12										

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1505W9-1XX2XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	23.8.11		LINEAR	ANGLES	APPROVED	Wang_jr	23.8.11			
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.8.11	TITLE: Pitch 1.5mm 90°单排卧贴 Wafer 包装规范		
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang		23.8.11	
			SIZE: A4	0.000±0.10	X°X' ±2°						