


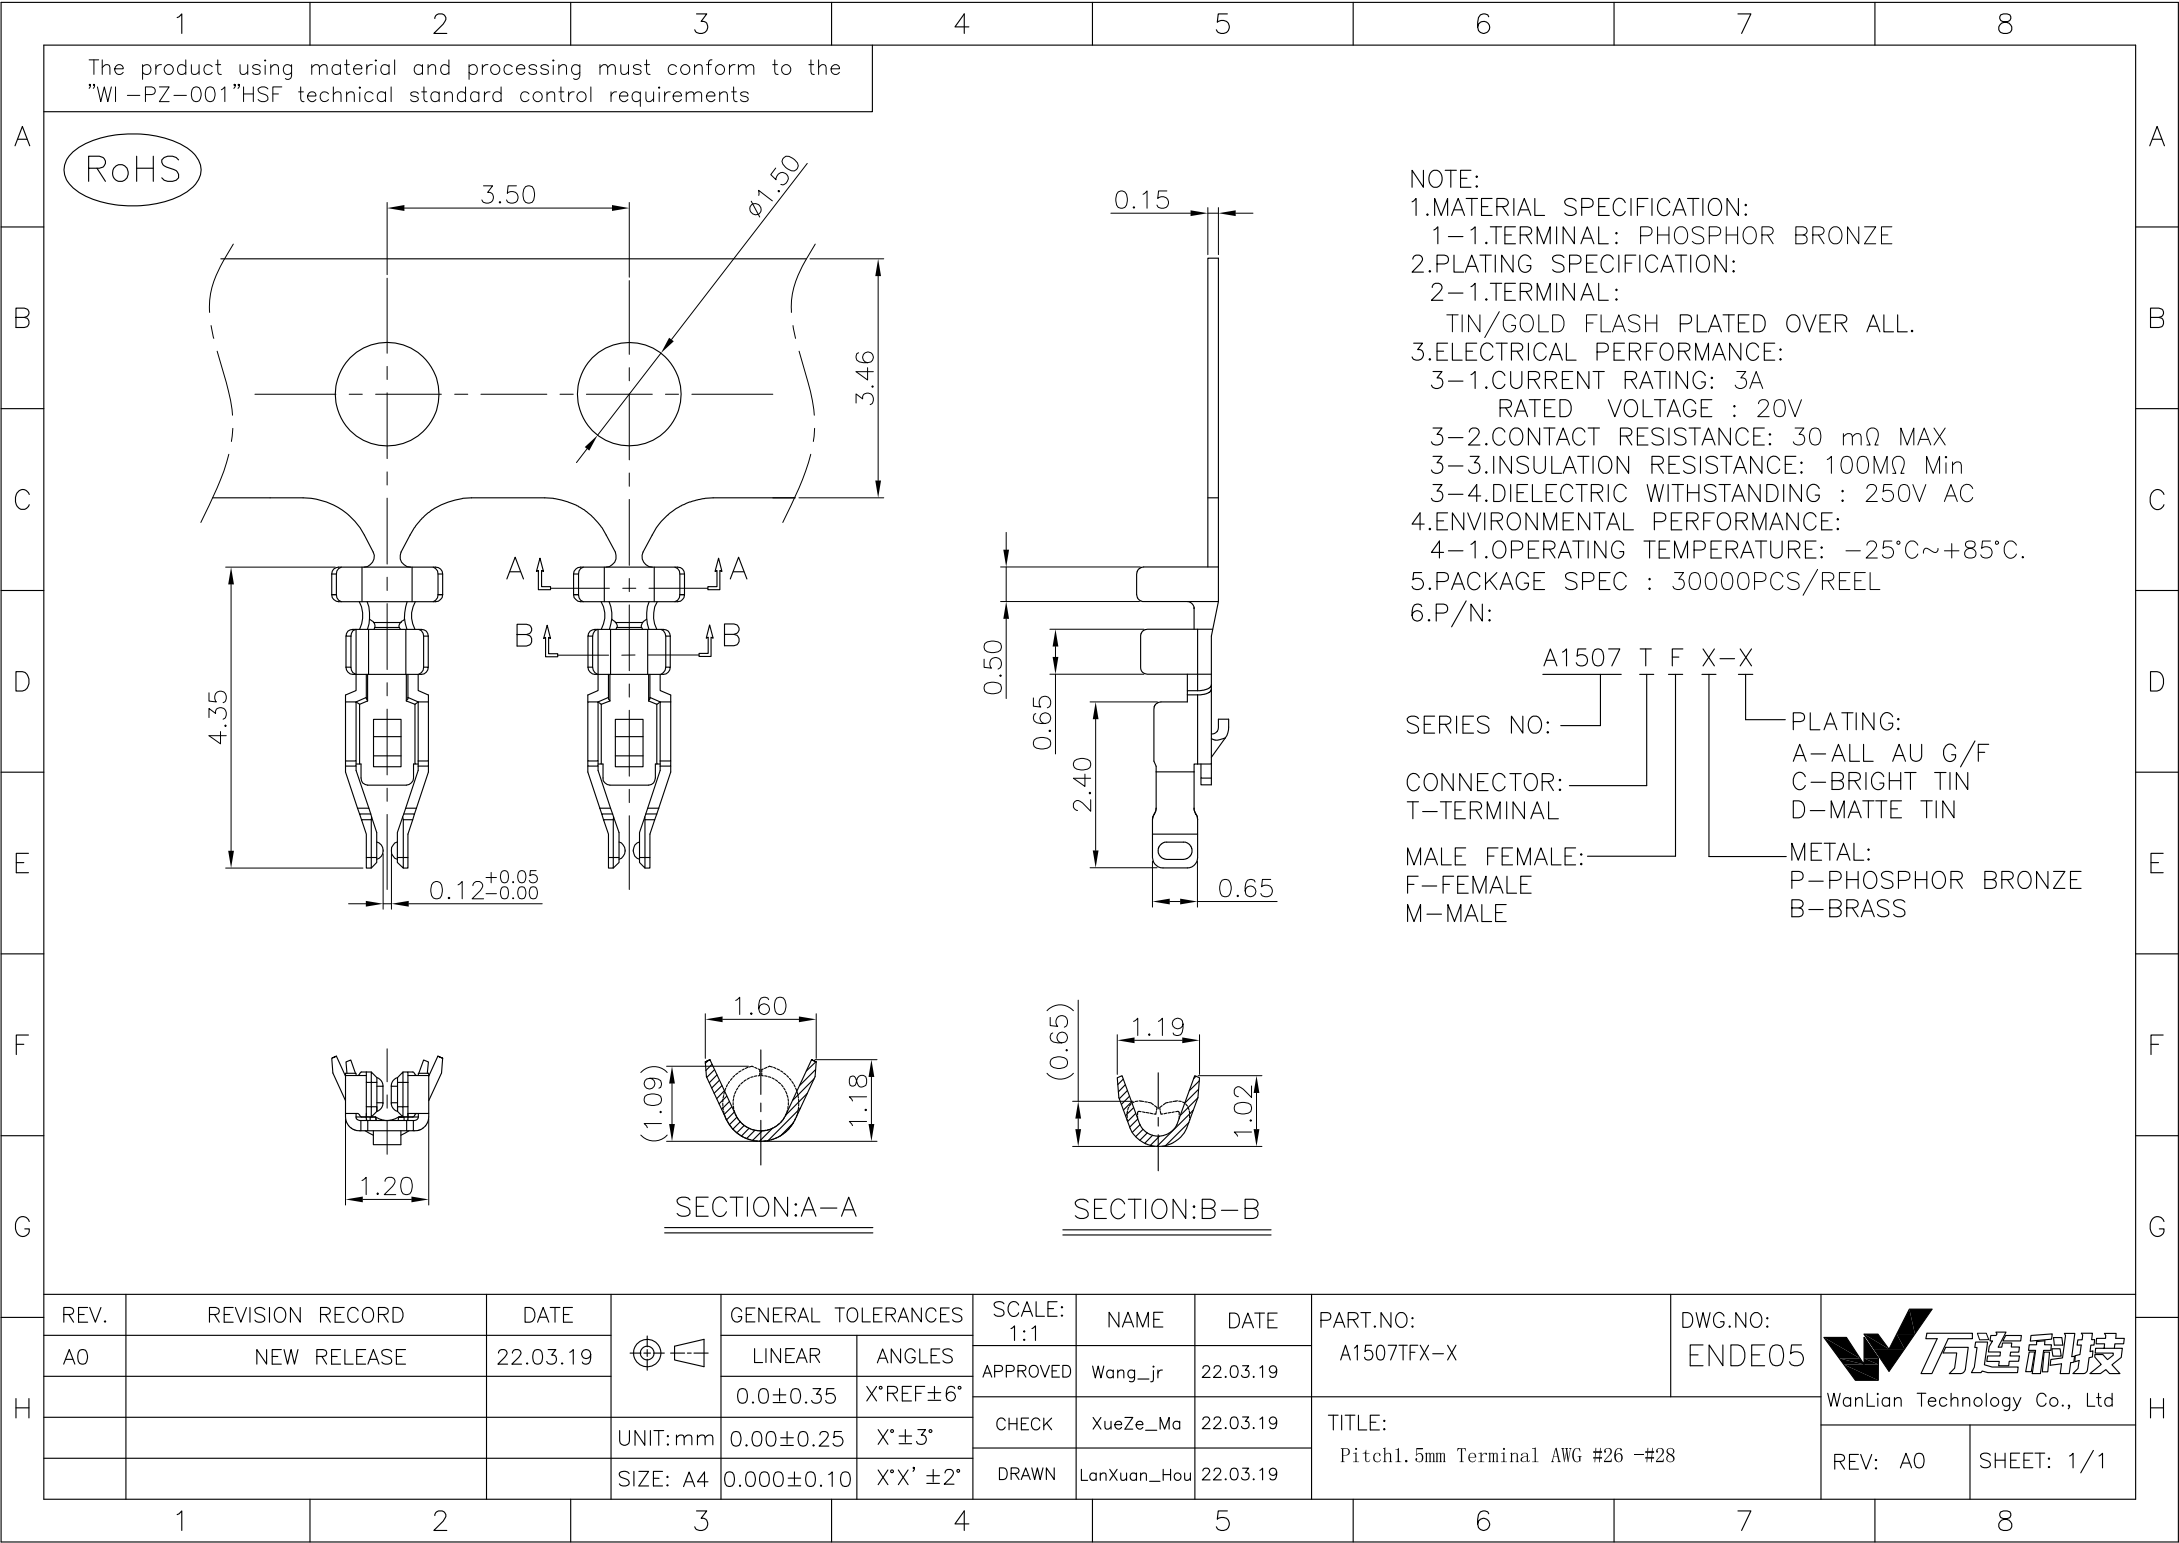

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
RATED VOLTAGE : 20V
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 100MΩ Min
3-4.DIELECTRIC WITHSTANDING : 250V AC
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC : 30000PCS/REEL
6.P/N:

SERIES NO: A1507 T F X-X
CONNECTOR: T
MALE FEMALE: F
F-FEMALE
M-MALE
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1507TFX-X	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19				
				0.0±0.35	X°REF±6°							
				UNIT:mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch1.5mm Terminal AWG #26 -#28		
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19			
											REV: A0	SHEET: 1/1

WanLian Technology Co., Ltd
REV: A0
SHEET: 1/1