




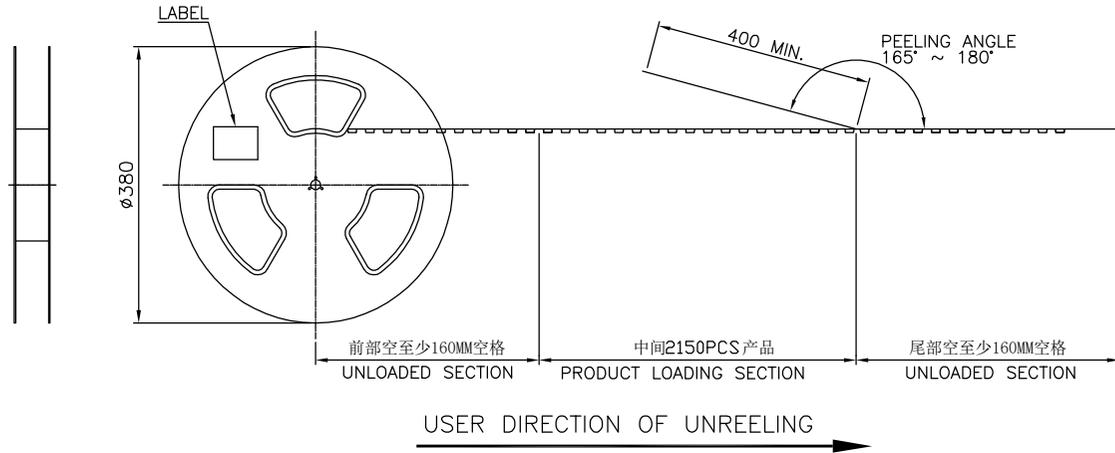


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

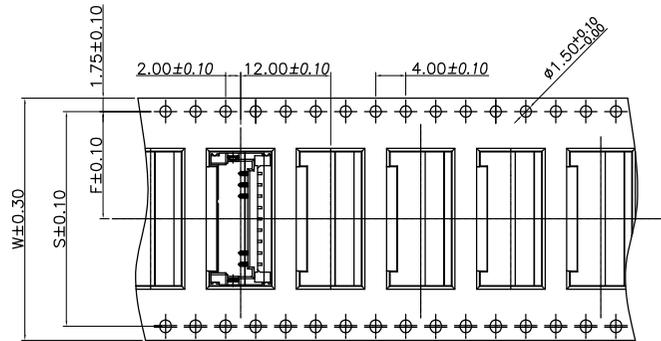

标签粘贴处  
Location of label sticking

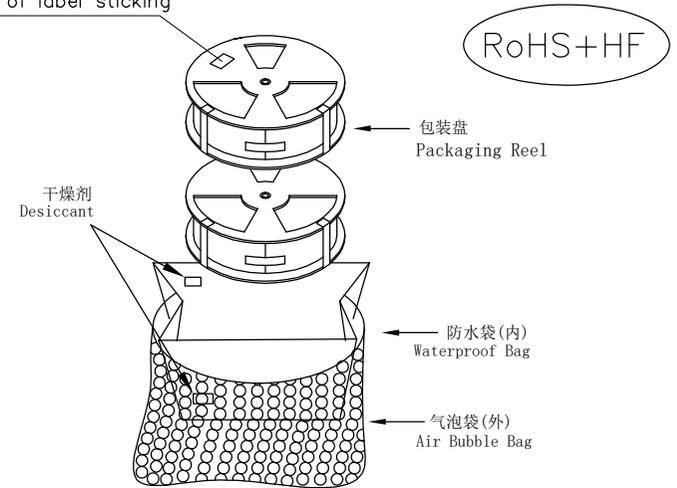

⊙≡∅	W	S	F	A
5	24	/	11.5	11.7
9	32	28.4	14.2	17.7

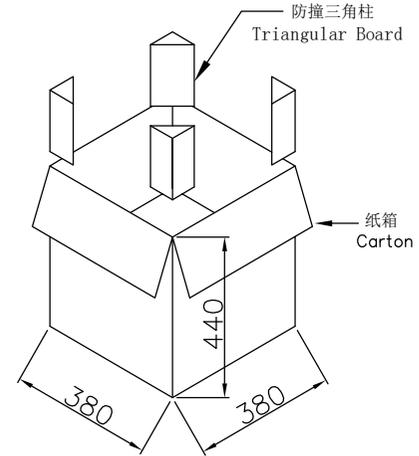

NOTE:

- MATERIAL:  
BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).  
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, COLOR BLACK.  
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.  
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

9	2150	11	23650 PCS	-- KG	--KG
5	2150	14	20100 PCS	-- KG	--KG
PIN NUMBER	PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19	 LINEAR 0.0±0.35	ANGLES X'REF±6°	1:1	Wang_jr	22.03.19	A1507W9-1XX2XX0	ENDE05	
					UNIT:mm 0.00±0.25	X'±3°	CHECK	XueZe_Ma	22.03.19	
			SIZE: A4	0.000±0.10			X'X' ±2°	DRAWN	LanXuan_Hou	