



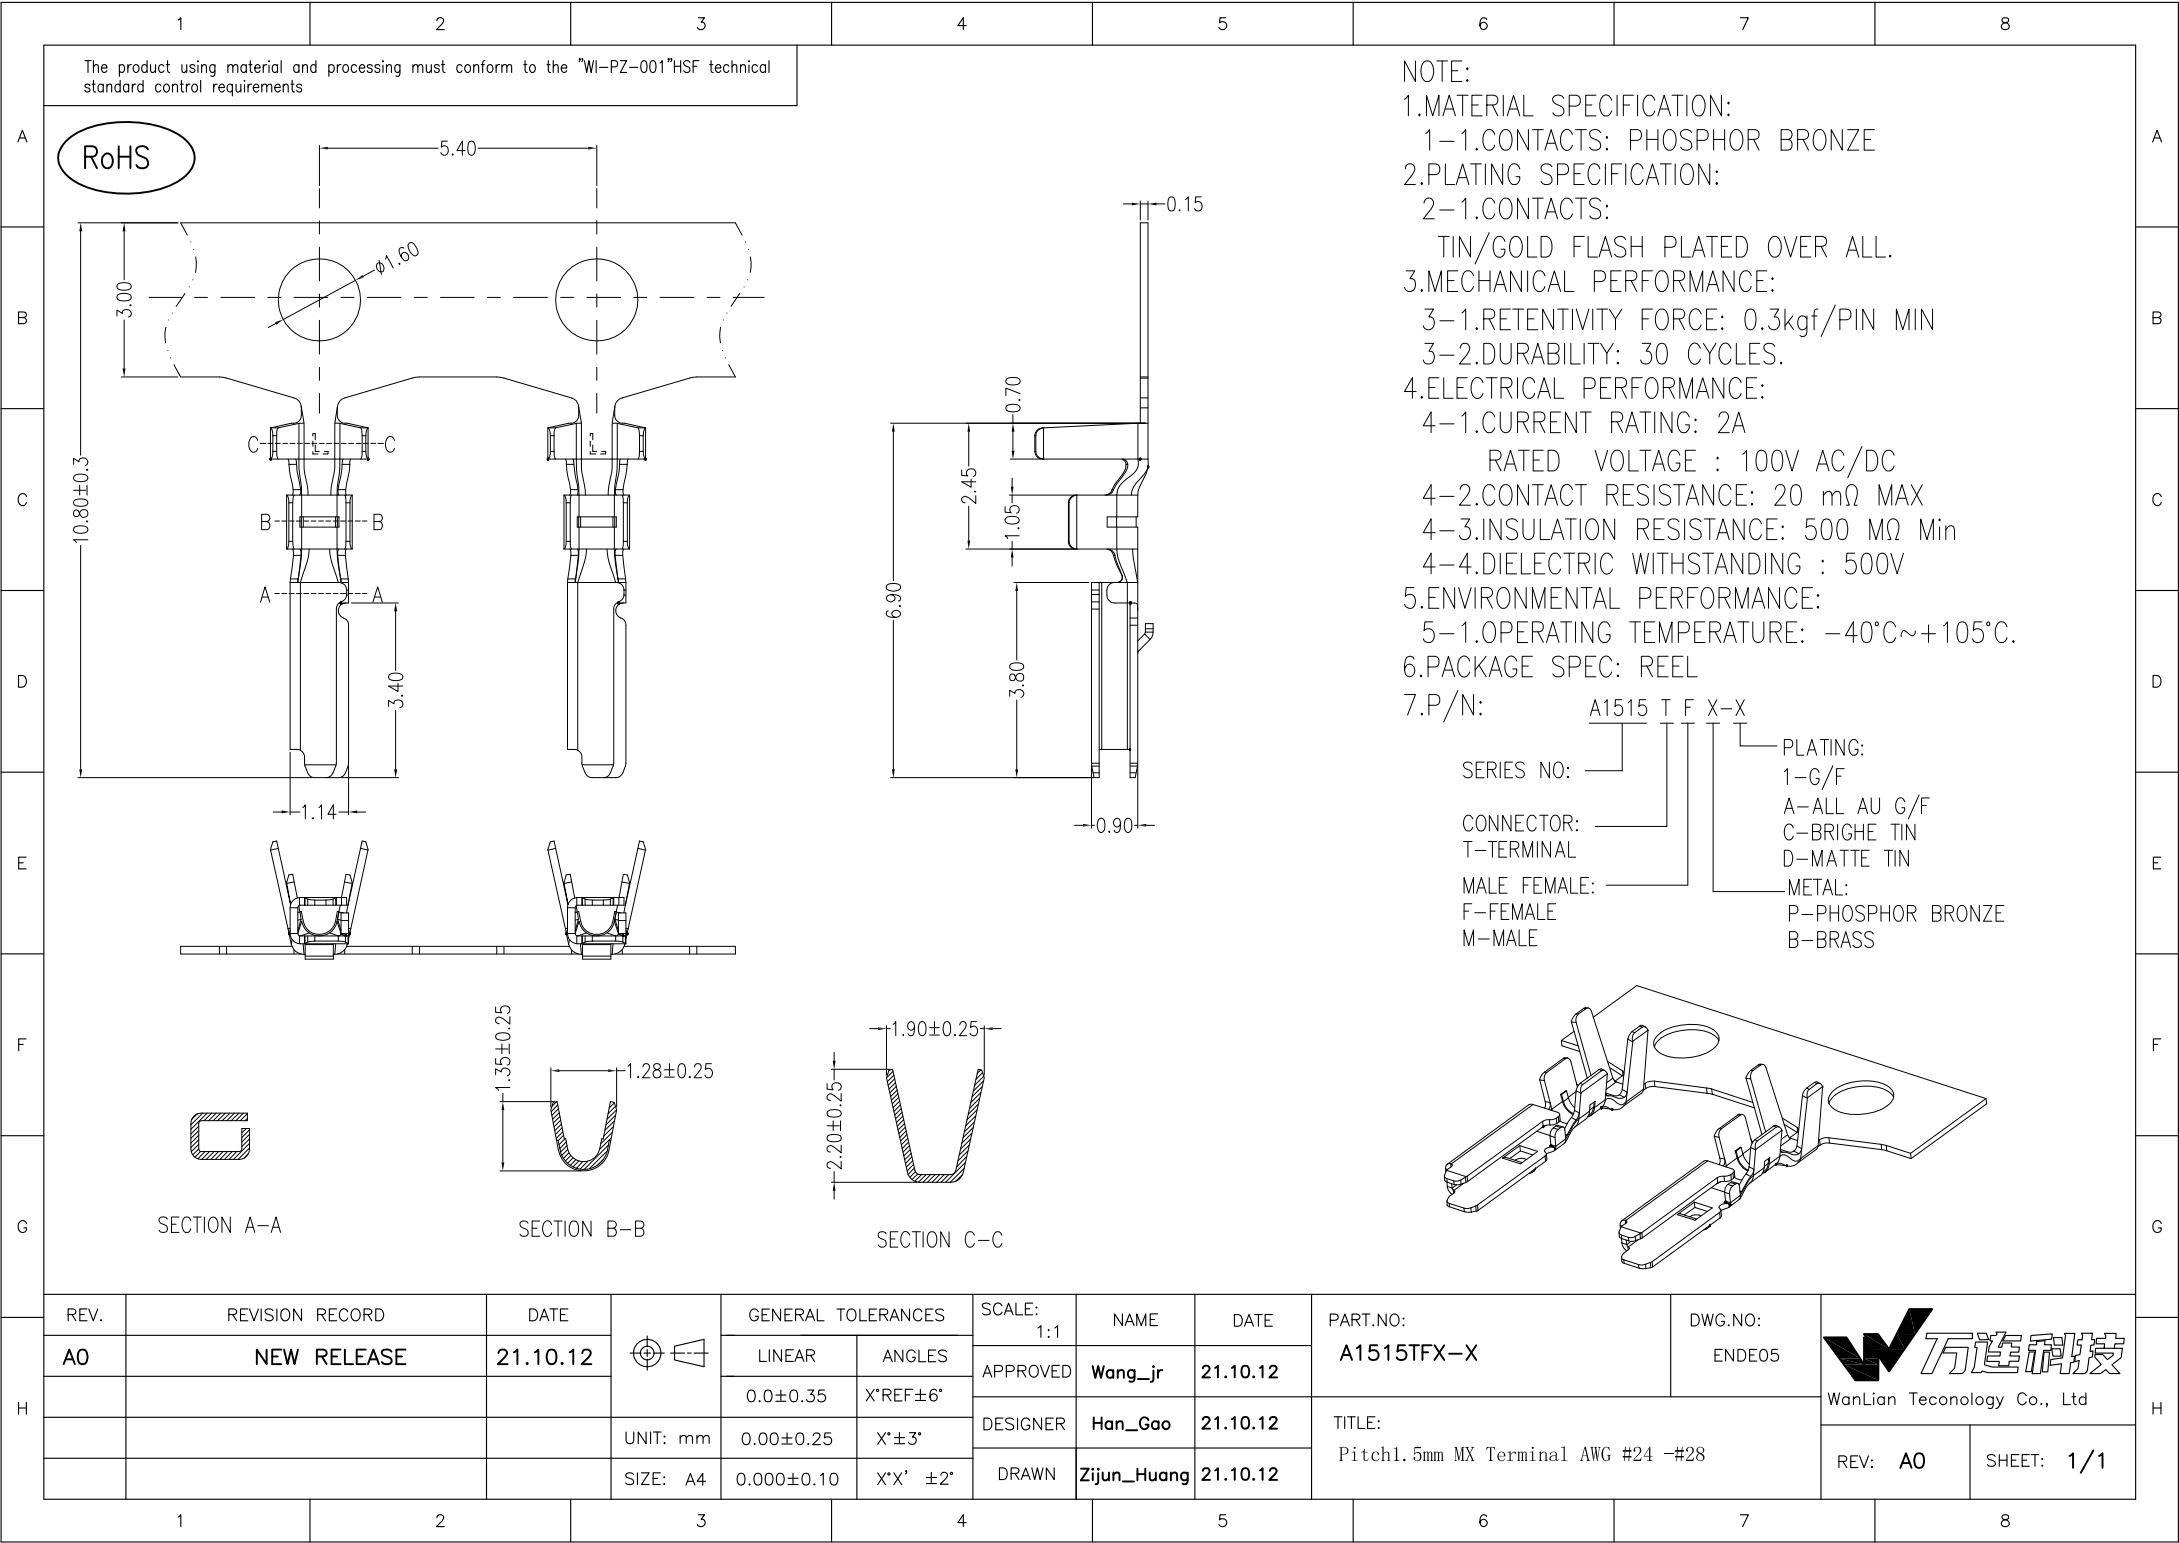

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 0.3kgf/PIN MIN
3-2.DURABILITY: 30 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 100V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 500 MΩ Min
4-4.DIELECTRIC WITHSTANDING : 500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -40°C~+105°C.
6.PACKAGE SPEC: REEL
7.P/N:

SERIES NO: A1515 T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

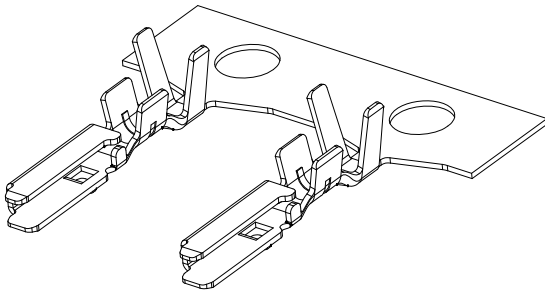

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12	A1515TFX-X	ENDE05	
			UNIT: mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch1.5mm MX Terminal AWG #24 -#28		WanLian Teconology Co., Ltd
				0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.10.12			
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0 SHEET: 1/1