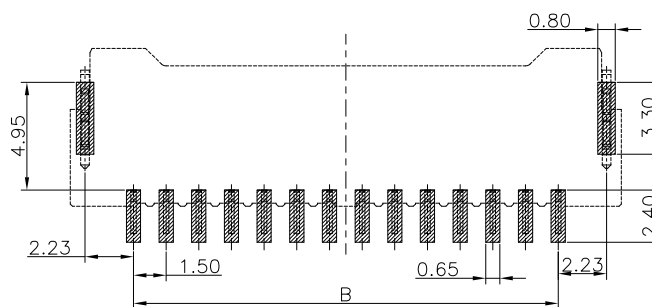

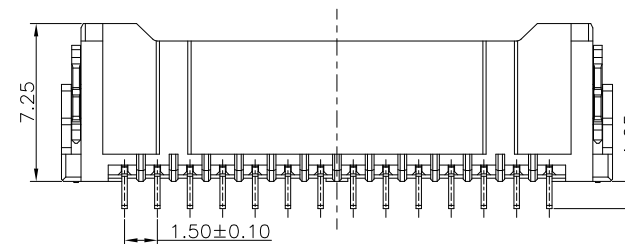
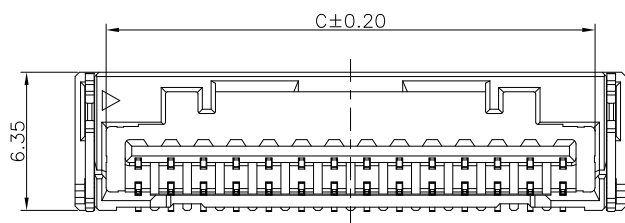
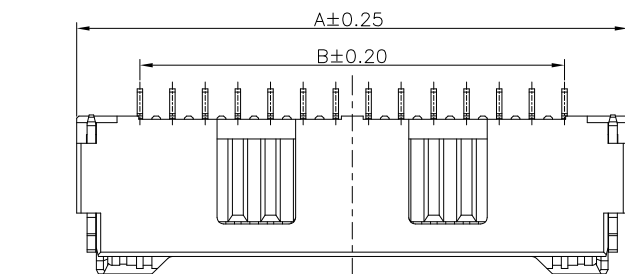


$$\text{RoHS} + \text{HF}$$


P.C.B LAYOUT

A1

7.P/N:

 A1515 W 9-1 XX 2 X X 0

SERIES NO: _____

CONNECTOR: _____
W-WAFER

ANGLE: _____
9-90°
0-180°

ROW NO: _____
1-SINGLE ROW


PIN Q' PY: _____
02~15

COLOR:
A-BLACK
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN

TERMIPOINT:
2-SMT

Circuit	Dimensions			Circuit	Dimensions		
	A	B	C		A	B	C
02	7.30	---	4.45	09	17.80	12.00	14.95
03	8.80	3.00	5.95	10	19.30	13.50	16.45
04	10.30	4.50	7.45	11	20.80	15.00	17.95
05	11.80	6.00	8.95	12	22.30	16.50	19.45
06	13.30	7.50	10.45	13	23.80	18.00	20.95
07	14.80	9.00	11.95	14	25.30	19.50	22.45
08	16.30	10.50	13.45	15	26.80	21.00	23.95

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1515W9-1XX2XX0	DWG.NO: ENDE05	
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	23.8.28			
A1	PART NUMBER RENEWAL	23.8.28		0.0±0.35	X°REF±6°				DESIGNER	Han_Gao	
				UNIT: mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang			
			SIZE: A4	0.000±0.10	X°X' ±2°						


WanLian Technology Co., Ltd

REV: A1


SHEET: 1/3

	1	2	3	4	5	6	7	8					
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements													
A	RoHS+HF												
B													
C													
D	02P	03P	04~05P	06~07P	08~11P								
E													
F													
G	12~15P												
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
	A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	23.8.28	A1515W9-1XX2XX0	ENDE05		
	A1	PART NUMBER RENEWAL	23.8.28		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.8.28	TITLE: Pitch1.50mm 90°MX单排卧贴 Wafer			
				UNIT: mm	0.00±0.25	X°±3°		DRAWN	Zijun_Huang	23.8.28	REV: A1 SHEET: 2/3		
				SIZE: A4	0.000±0.10	X°X' ±2°							
	1	2	3	4	5	6	7	8					


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

$$\text{RoHS} + \text{HF}$$


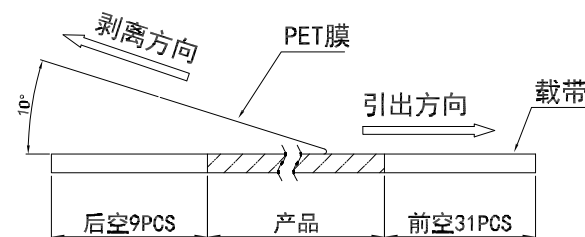
—12.00— MYLAR 产品引出方向
02~05 CONTACTS

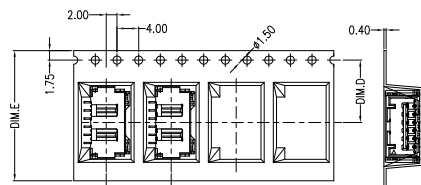


06~07 CONTACTS

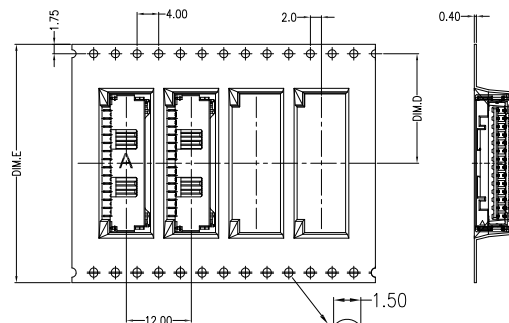


08~15 CONTACTS




(PET膜剥离示意图)

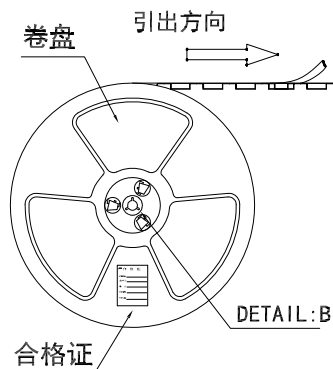


DETAIL: B




DETAIL:B



装**盘 (查看列表一)

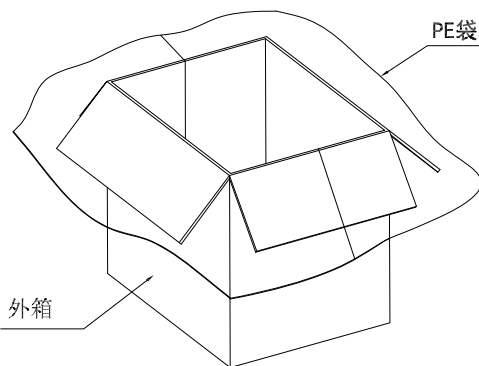

外箱

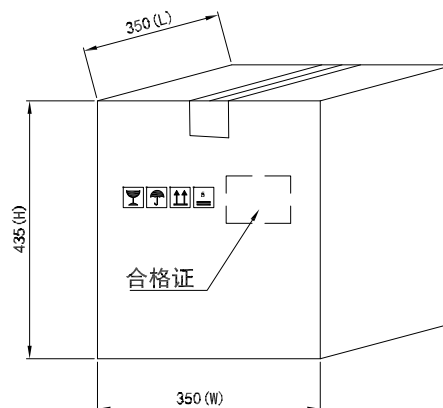

列表一

包装说明:

1. 把成品包入卷盘中，每盘装800PCS，卷盘上贴上合格证，将装好产品的卷盘放进外箱中，外箱内先套一个大PE袋，外箱上贴贴上合格证。
2. 2~5Pin贴麦拉，6~12孔不贴麦拉

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Carton)
02~03 PIN	7.5	16	800PCS	20/Reel
04~07 PIN	11.5	24	800PCS	15/Reel
08~11 PIN	14.2	32	800PCS	11/Reel
12~15 PIN	20.2	44	800PCS	8/Reel

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1515W9-1XX2XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	REV: A1	SHEET: 3/3
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12					
A1	PART NUMBER RENEWAL	23.8.28		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE: 包装规范				
				UNIT: mm	0.00±0.25					X°±3°			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang		21.10.12			



WanLian Technology Co., Ltd

REV: A1

SHEET: 3/3