


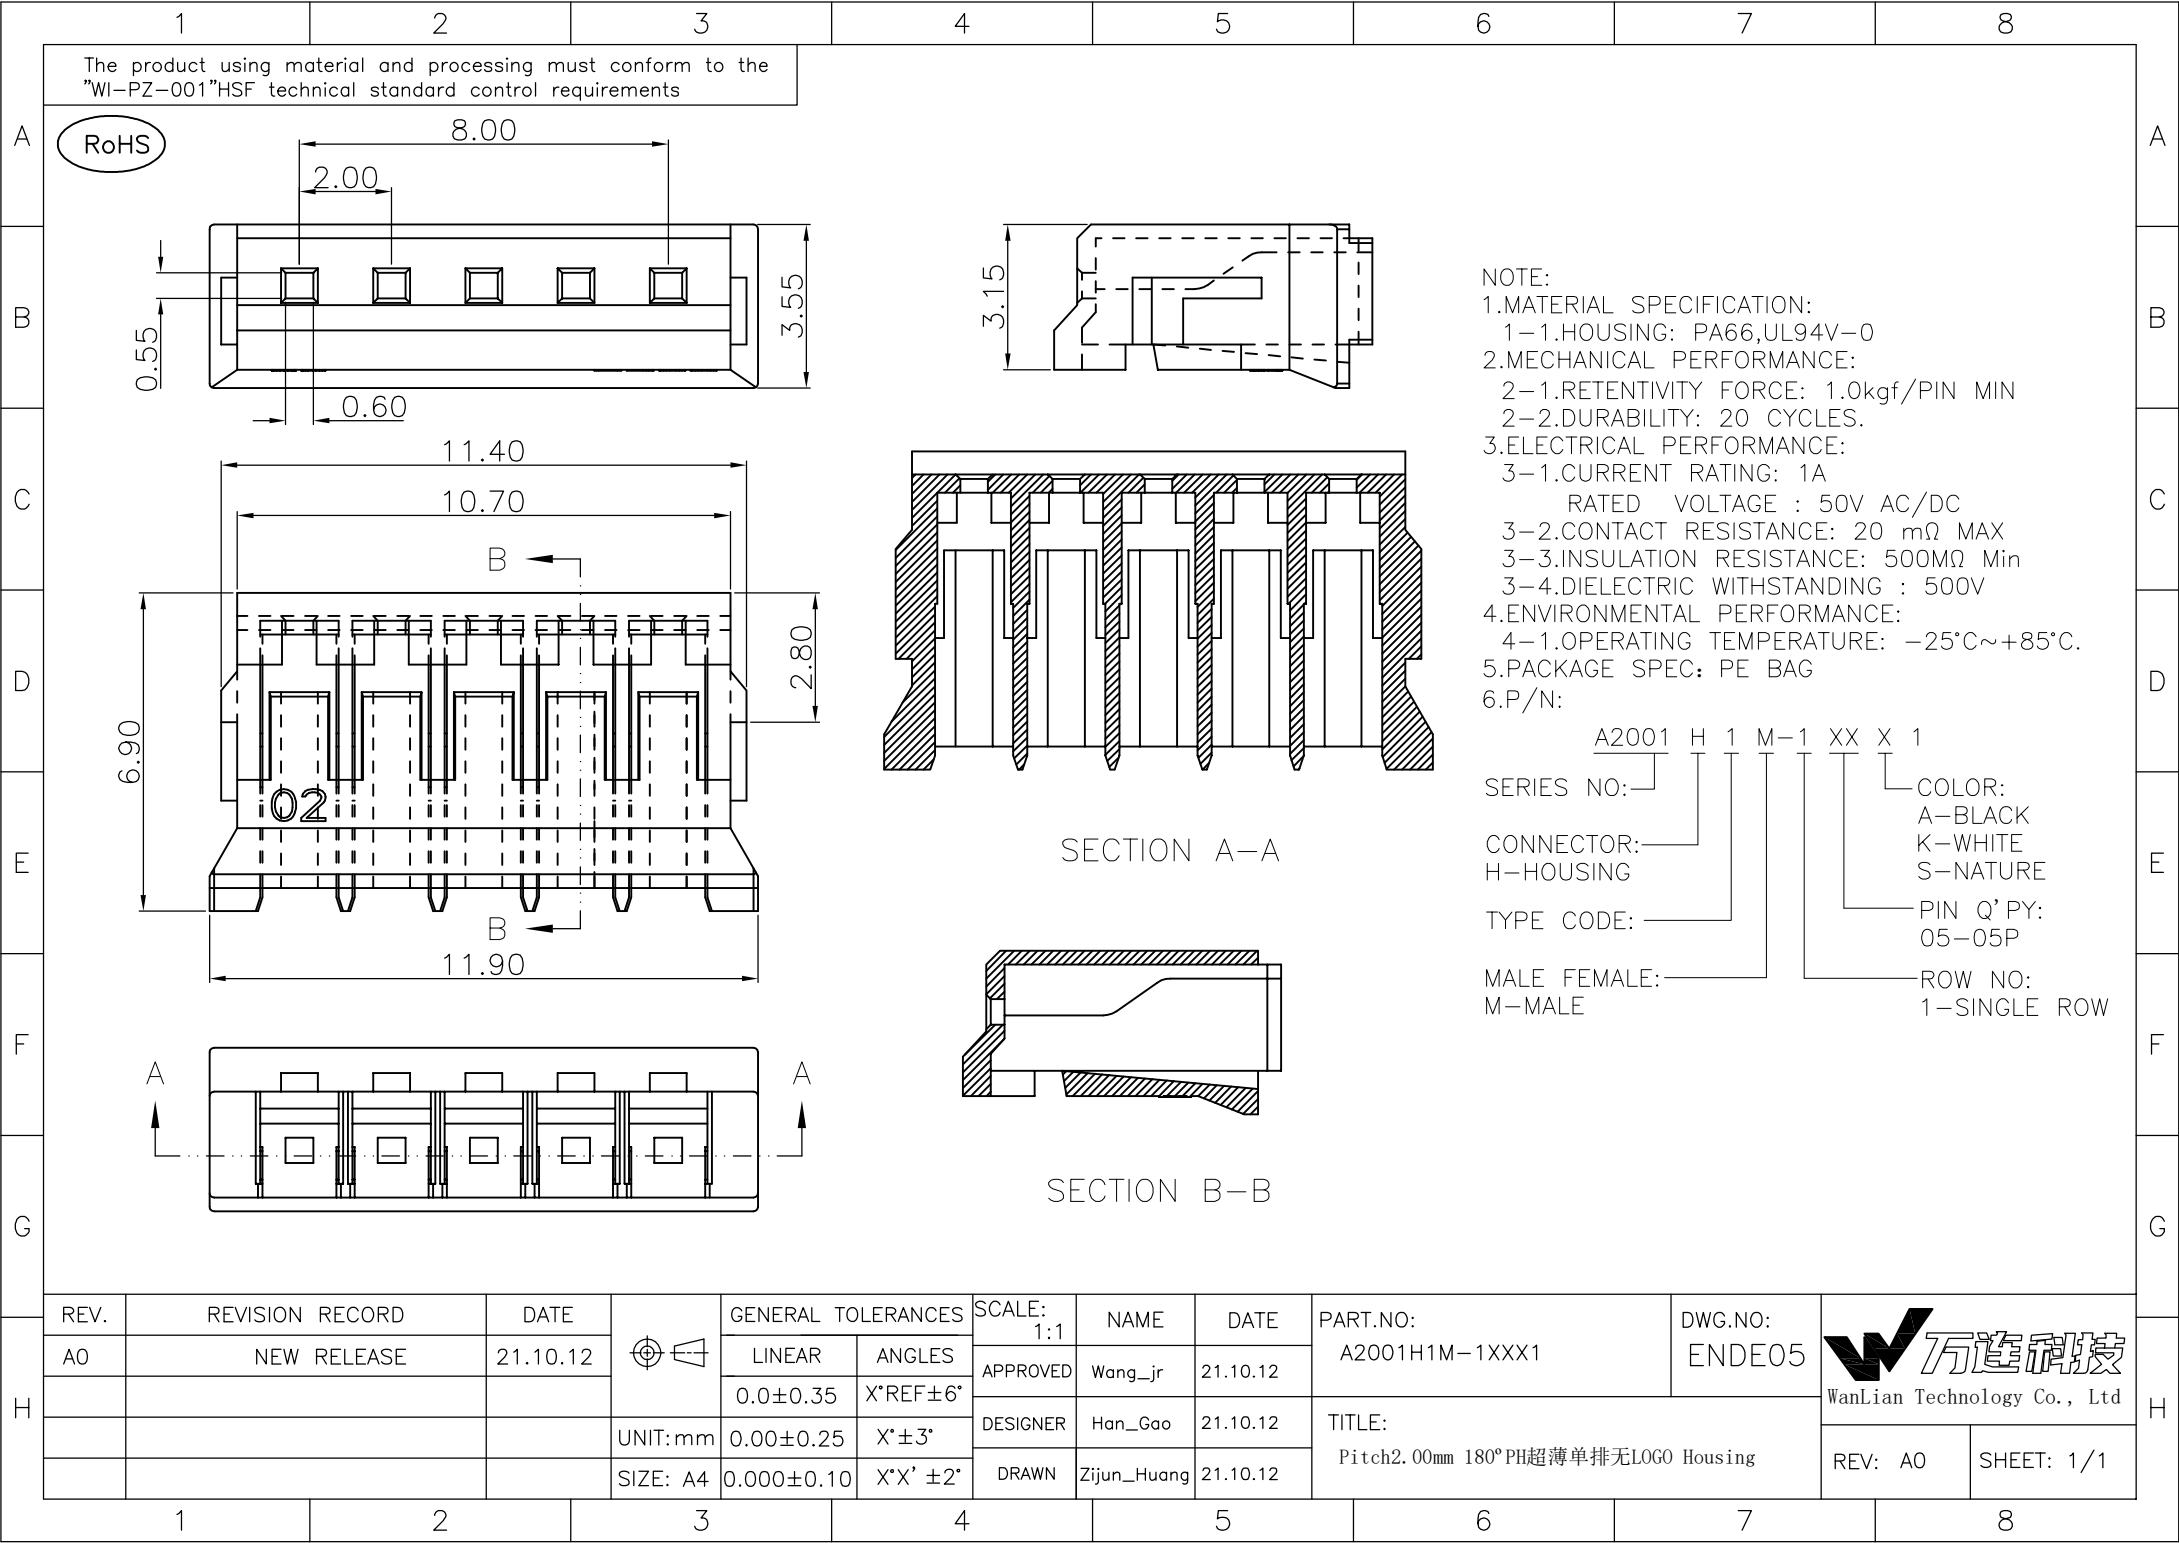

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 1.0kgf/PIN MIN
2-2.DURABILITY: 20 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
RATED VOLTAGE : 50V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 500MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

SERIES NO: A2001 H 1 M-1 XX X 1
CONNECTOR: H-HOUSING
TYPE CODE: M-MALE
COLOR: A-BLACK
K-WHITE
S-NATURE
PIN Q'PY: 05-05P
ROW NO: 1-SINGLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2001H1M-1XXX1	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12				
				0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch2.00mm 180° PH超薄单排无LOGO Housing	REV: A0	SHEET: 1/1	
			UNIT:mm	0.00±0.25	X'±3°	DRAWN	Zijun_Huang	21.10.12				
			SIZE: A4	0.000±0.10	X'X' ±2°							