


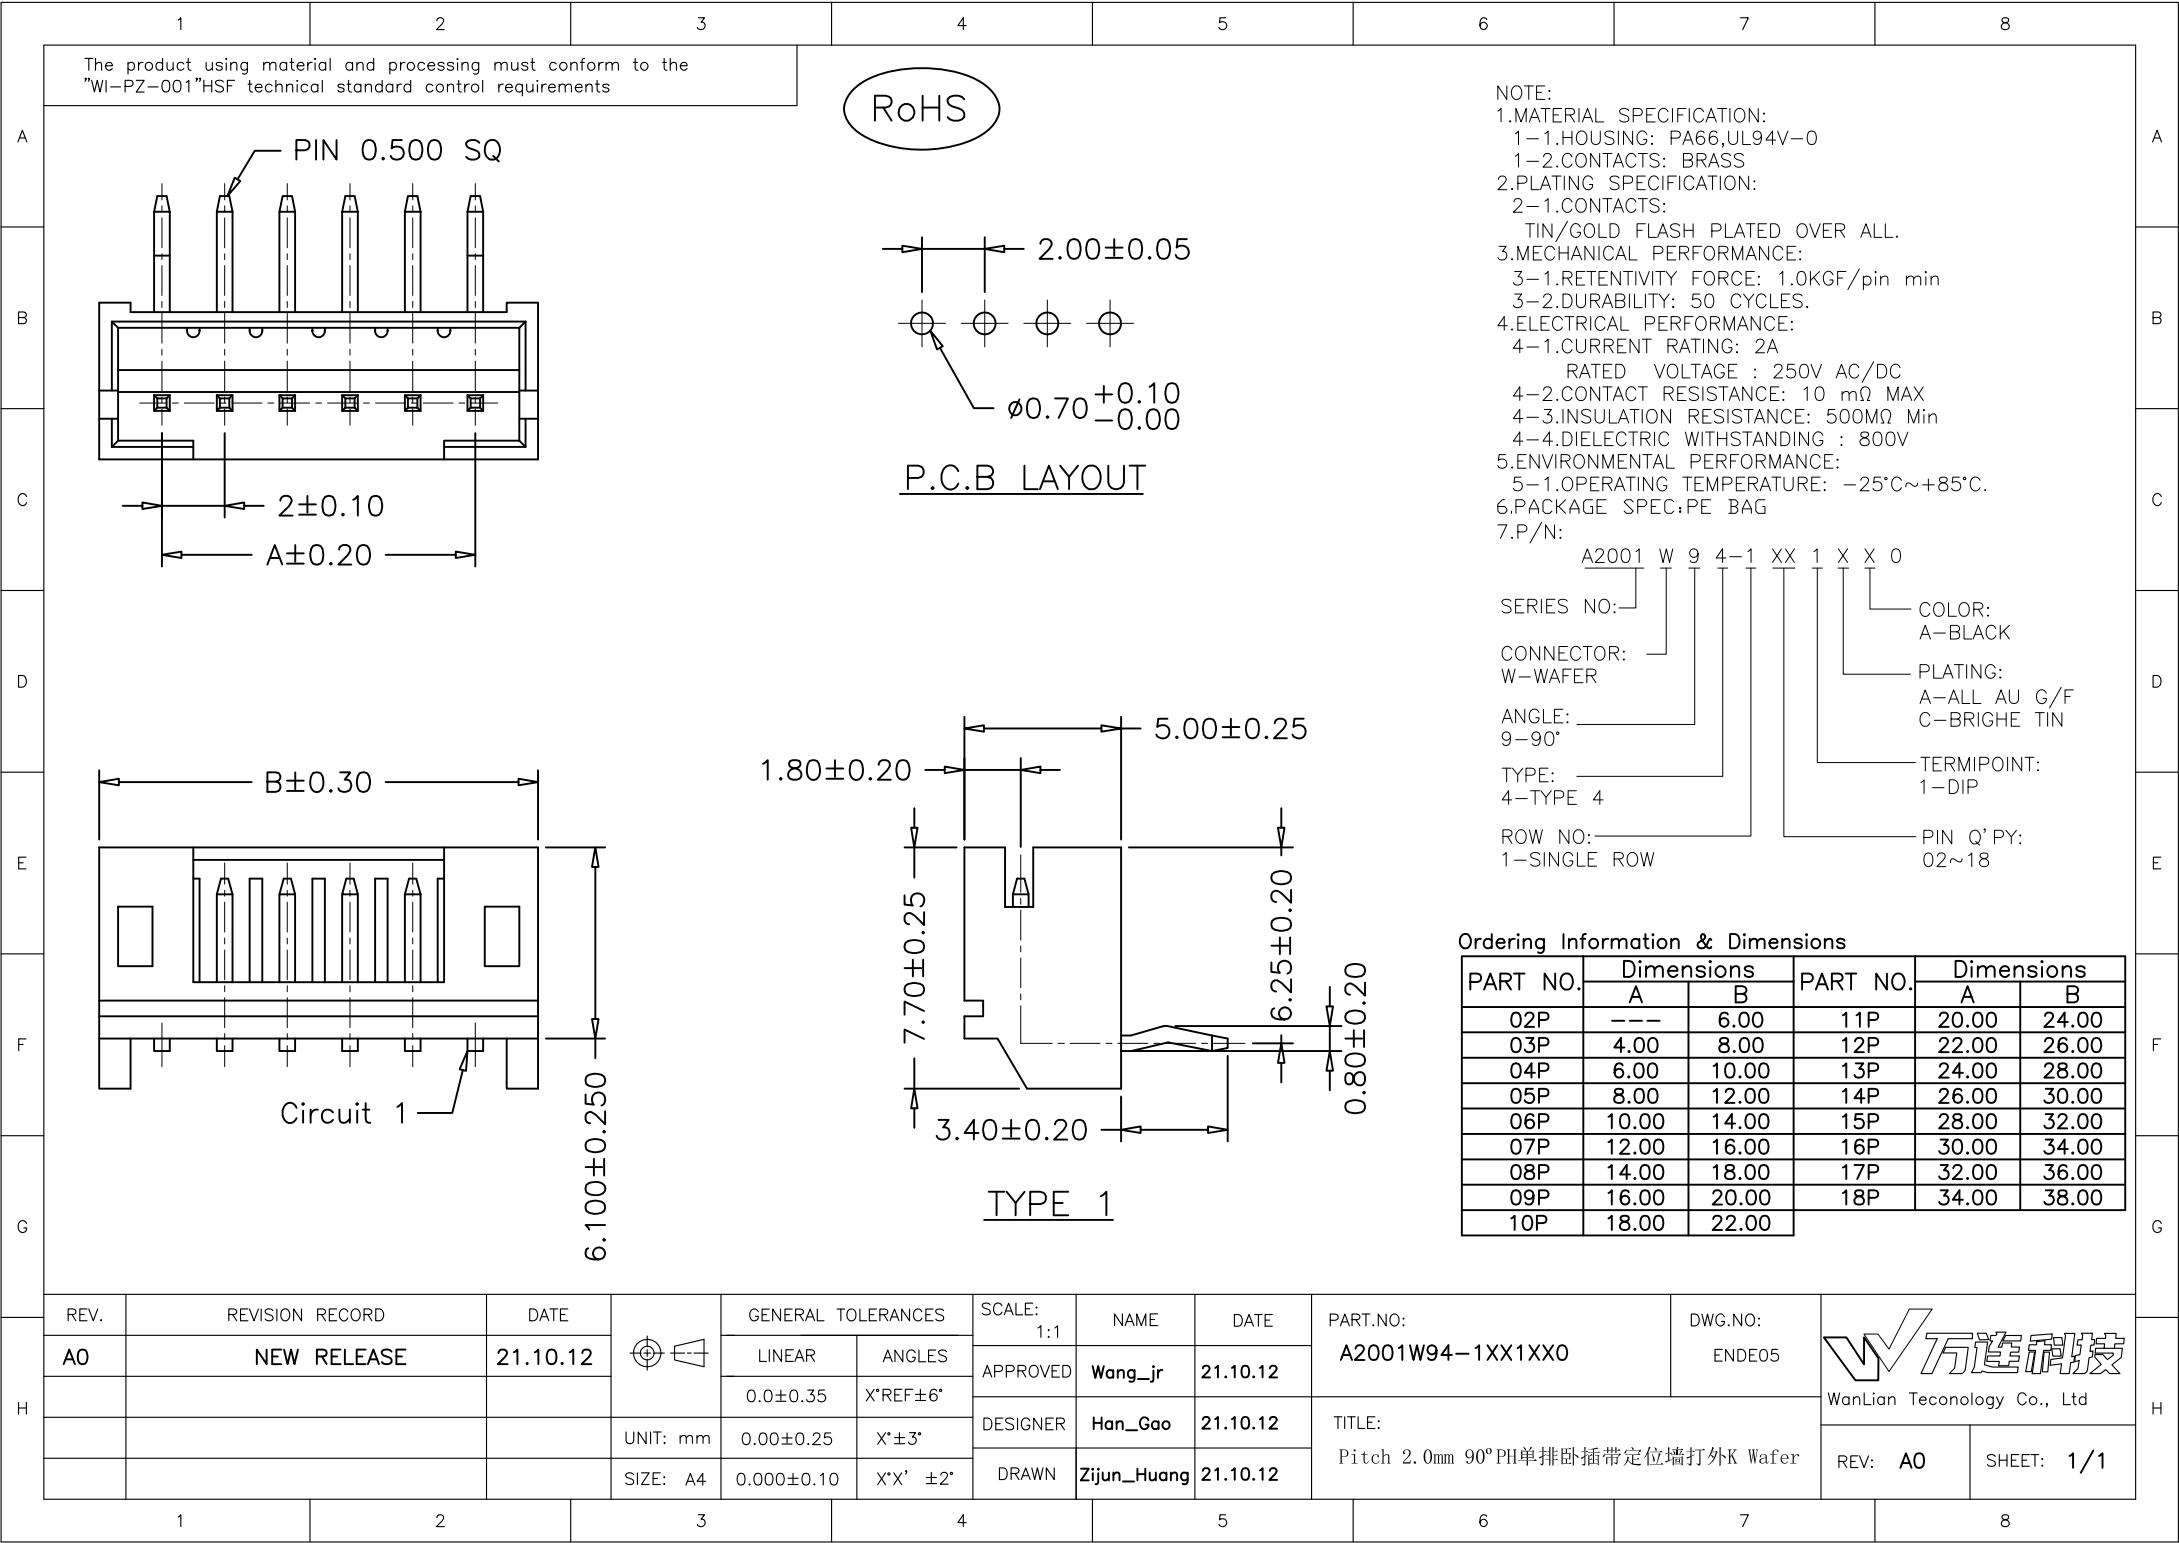

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/pin min
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 10 mΩ MAX
4-3.INSULATION RESISTANCE: 500MΩ Min
4-4.DIELECTRIC WITHSTANDING : 800V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC:PE BAG
7.P/N:

A2001 W 9 4-1 XX 1 X X 0
SERIES NO:
CONNECTOR: W-WAFER
ANGLE: 9-90°
TYPE: 4-TYPE 4
ROW NO: 1-SINGLE ROW
COLOR: A-BLACK
PLATING: A-ALL AU G/F C-BRIGHE TIN
TERMIPOINT: 1-DIP
PIN Q' PY: 02~18

Ordering Information & Dimensions					
PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
02P	---	6.00	11P	20.00	24.00
03P	4.00	8.00	12P	22.00	26.00
04P	6.00	10.00	13P	24.00	28.00
05P	8.00	12.00	14P	26.00	30.00
06P	10.00	14.00	15P	28.00	32.00
07P	12.00	16.00	16P	30.00	34.00
08P	14.00	18.00	17P	32.00	36.00
09P	16.00	20.00	18P	34.00	38.00
10P	18.00	22.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd			
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12	A2001W94-1XX1XX0			ENDE05		
				0.0±0.35	X°REF±6°									
				UNIT: mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch 2.0mm 90°PH单排卧插带定位墙打外K Wafer		REV: A0	SHEET: 1/1	
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.10.12					