

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
2-1.TERMINAL:SN PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.5KGF/pin min
3-2.DURABILITY: 50 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2.0A
4-2.VOLTAGE RATING: 250V MAX
4-3.CONTACT RESISTANCE: 10mΩ Max.
4-4.INSULATION RESISTANCE: 1000MΩ MIN
4-5.DIELECTRIC WITHSTANDING VOLTAGE:
800V AC Min
- 5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6. APPLICABLE WIRE GAUGE: AWG #28 TO #22
7. APPLICABLE PANEL THICKNESS :0.9 to 1.5mm
- 8.PACKAGE SPEC:PAPER PLATE
- 9.P/N ORDER:

A2006 T F X-X

SERIES NO:

CONNECTOR:
T-TERMINAL






MALE FEMALE:
F-FEMALE
M-MALE

PLATING:


1-G/F
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN

METAL:

P-PHOSPHOR BRONZE
B-BRASS

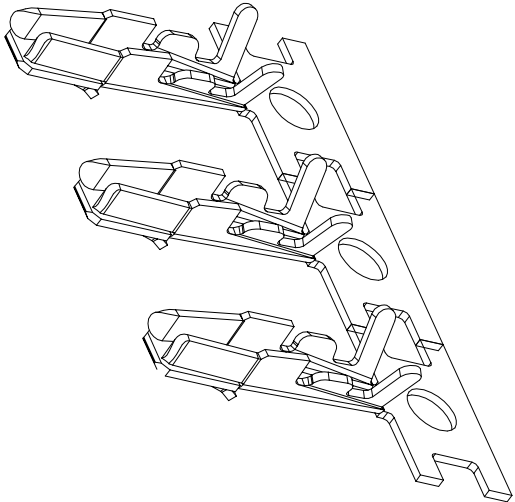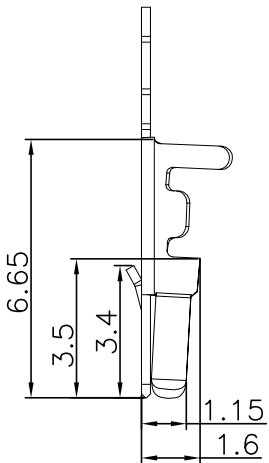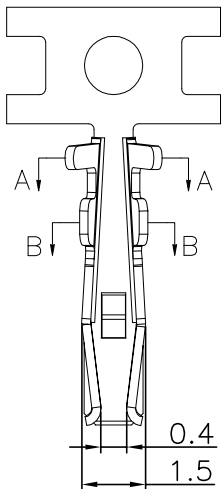

SECTION:A-A



SECTION:B-B

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2006TFX-X	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
A0	NEW RELEASE	21.01.13		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.01.13			
				0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.01.13	TITLE: Pitch2.00mm 180°PHD Terminal AWG #22 -#28		
			UNIT:mm	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.01.13			
			SIZE: A4								REV: A0
											SHEET: 1/1