

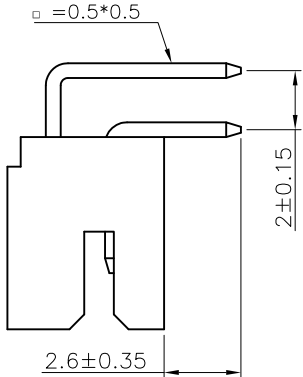
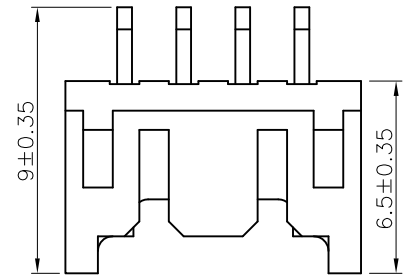


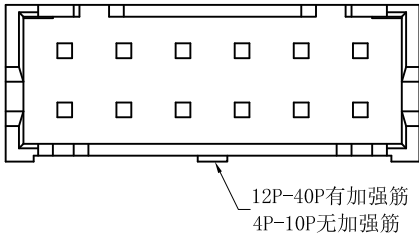


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

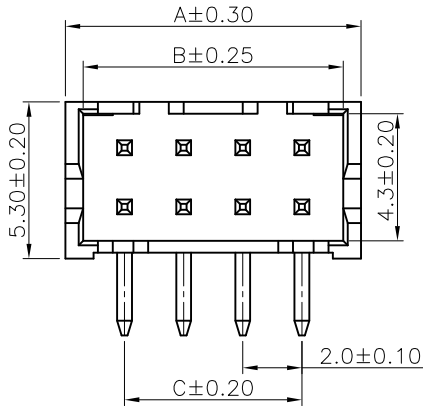

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA46/PA66
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:SN/AU PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.5KGF/pin min
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3.0A
4-2.VOLTAGE RATING: 250V MAX
4-3.CONTACT RESISTANCE: 10mΩ Max.
4-4.INSULATION RESISTANCE: 1000MΩ MIN
4-5.DIELECTRIC WITHSTANDING VOLTAGE: 800V AC Min
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC:PE BAG
7.P/N ORDER:

△A1 A2006 W 9-2 XX 1 X X X
SERIES NO: WATER CODE
1-PA66,UL94V-0
2-PA46,UL94V-0
CONNECTOR: W-WAFER
COLOR:
A-BLACK
K-WHITE
S-NATURE
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
ANGLE: 9-90°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 04~40
TERMIPOINT: 1-DIP

Ordering Information & Dimensions							
Circuit	A	B	C	Circuit	A	B	C
2*02	6.00	4.90	2.00	2*12	26.00	24.90	22.00
2*03	8.00	6.90	4.00	2*13	28.00	26.90	24.00
2*04	10.00	8.90	6.00	2*14	30.00	28.90	26.00
2*05	12.00	10.90	8.00	2*15	32.00	30.90	28.00
2*06	14.00	12.90	10.00	2*16	34.00	32.90	30.00
2*07	16.00	14.90	12.00	2*17	36.00	34.90	32.00
2*08	18.00	16.90	14.00	2*18	38.00	36.90	34.00
2*09	20.00	18.90	16.00	2*19	40.00	38.90	36.00
2*10	22.00	20.90	18.00	2*20	42.00	40.90	38.00
2*11	24.00	22.90	20.00				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2006W9-2XX1XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.9.8				
A1	PART NUMBER RENEWAL	23.9.8		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.9.8	TITLE: Pitch 2.0mm 90° PHD双排DIP型 Wafer			
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	23.9.8				
			SIZE: A4	0.000±0.10	X°X' ±2°							
											REV: A1	SHEET: 1/1