


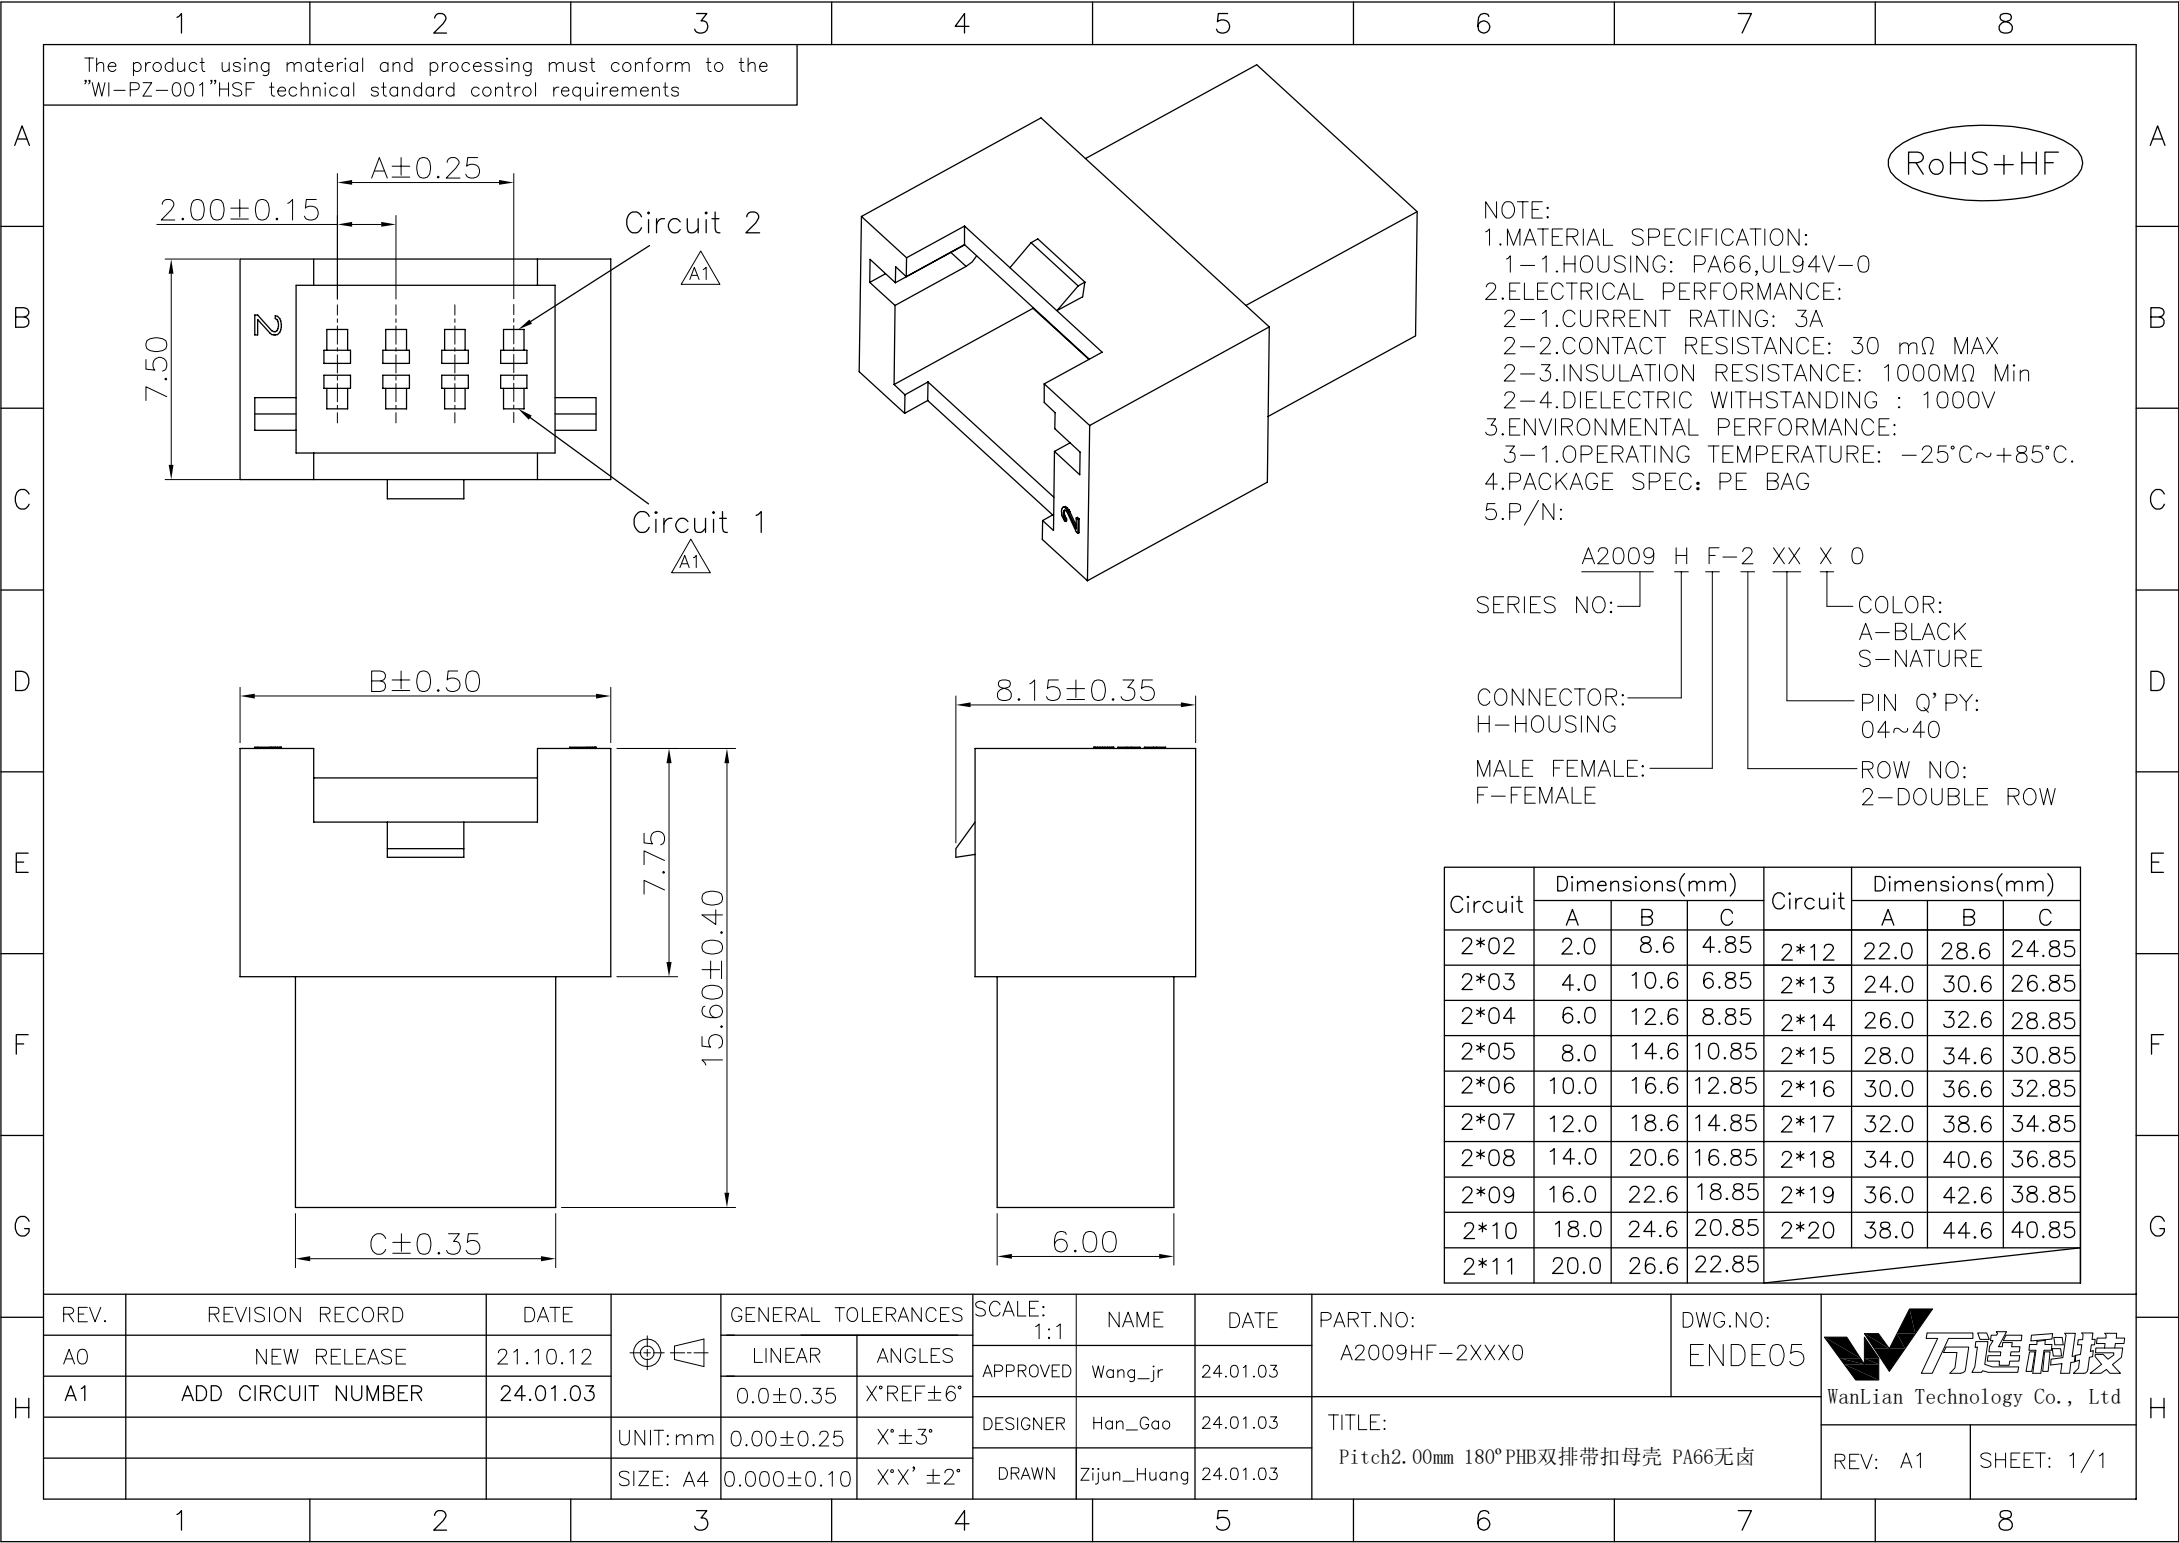

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 3A
2-2.CONTACT RESISTANCE: 30 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1000V
3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -25°C~+85°C.
4.PACKAGE SPEC: PE BAG
5.P/N:

SERIES NO: A2009 H F-2 XX X 0
COLOR:
A-BLACK
S-NATURE
CONNECTOR:
H-HOUSING
PIN Q'PY:
04~40
MALE FEMALE:
F-FEMALE
ROW NO:
2-DOUBLE ROW

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
2*02	2.0	8.6	4.85	2*12	22.0	28.6	24.85
2*03	4.0	10.6	6.85	2*13	24.0	30.6	26.85
2*04	6.0	12.6	8.85	2*14	26.0	32.6	28.85
2*05	8.0	14.6	10.85	2*15	28.0	34.6	30.85
2*06	10.0	16.6	12.85	2*16	30.0	36.6	32.85
2*07	12.0	18.6	14.85	2*17	32.0	38.6	34.85
2*08	14.0	20.6	16.85	2*18	34.0	40.6	36.85
2*09	16.0	22.6	18.85	2*19	36.0	42.6	38.85
2*10	18.0	24.6	20.85	2*20	38.0	44.6	40.85
2*11	20.0	26.6	22.85				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	24.01.03	A2009HF-2XXX0	ENDE05	
A1	ADD CIRCUIT NUMBER	24.01.03		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	24.01.03	TITLE: Pitch2.00mm 180°PHB双排带扣母壳 PA66无卤		
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	24.01.03			REV: A1
			SIZE: A4	0.000±0.10	X°X'±2°						SHEET: 1/1