


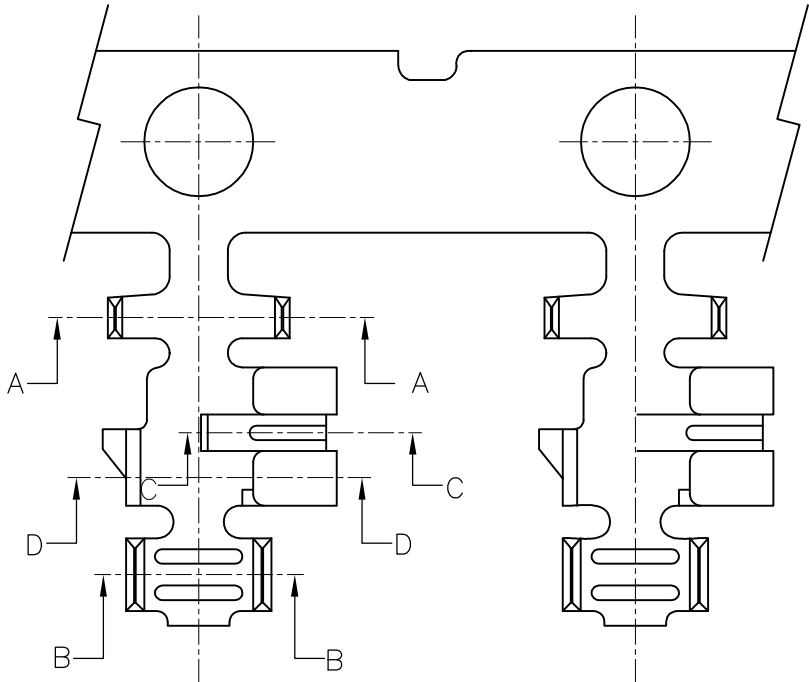


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

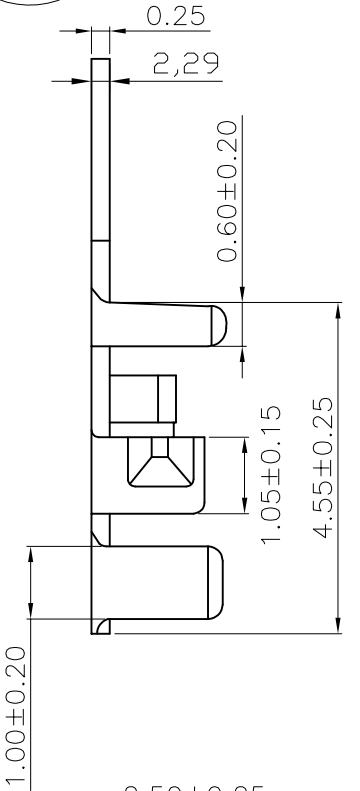


SEC:A-A



SEC:B-B



SEC:C-C

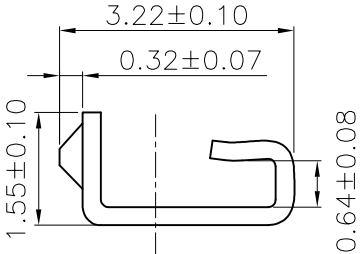

SEC:D-D

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL:
PHOSPHOR BRONZE AWG#22-#26
INSULATION O.D. 1.50mm(MAX)
2.PLATING SPECIFICATION:
2-1.TREMINAL:
TIN-PLATED ON CONTACT AREA.
3.MECHANICAL PERFORMANCE:
3-1.RETENTION FORCE: 1.5kgf/PIN MIN
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1. RATED CURRENT : 4A
RATED VOLTAGE : 125V AC
4-2.INSULATION RESISTANCE: 1000MΩ MIN
4-3.CONTACT RESISTANCE : 10mΩ MAX
4-4.WITHSTANDING VOLTAGE: 1000V AC
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC :10000PCS/REEL
7.P/N: A2010 T F X-X
SERIES NO: PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
CONNECTOR: T-TERMINAL
MALE FEMALE:
F-FEMALE
M-MALE
METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2010TFX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: Pitch2.00mm 180° AMP Terminal AWG #22 -#26	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.01.13			
										REV: A0	SHEET: 1/1