




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

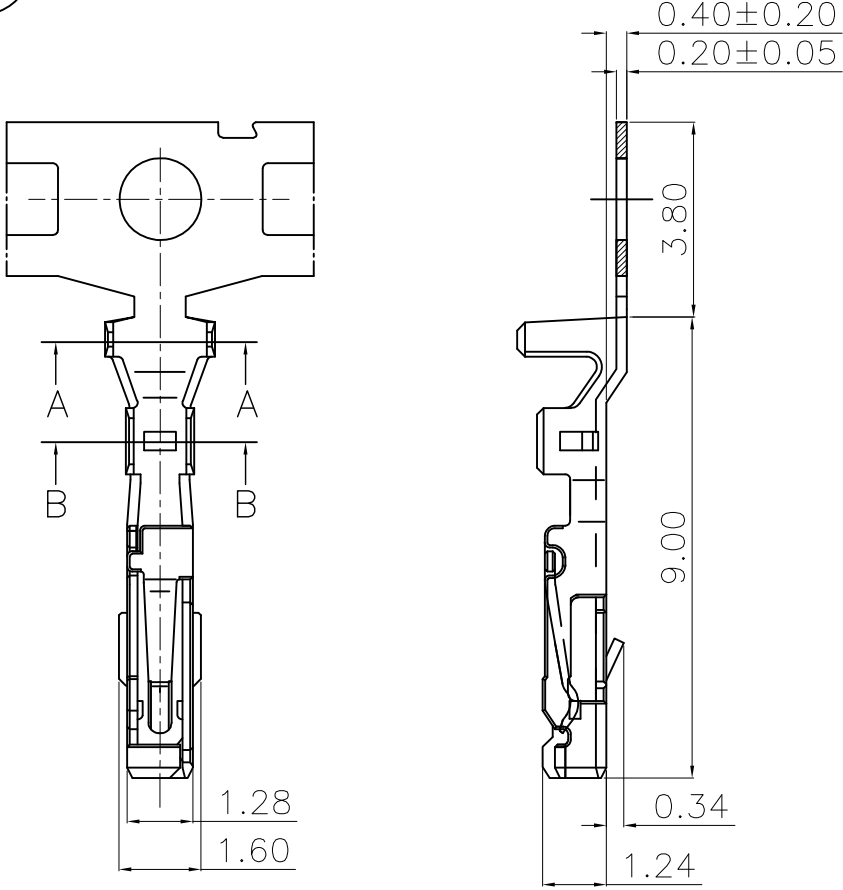

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL:
PHOSPHOR BRONZE AWG#22-#28
φ1.50mm (MAX) INSULATION O.D.
2.PLATING SPECIFICATION:
2-1.TREMINAL:
TIN-PLATED ON CONTACT AREA,
Plated after spring .
3.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 1.0kgf MAX
3-2.REMOVAL FORCE: 0.1kgf MIN
3-3.DURABILITY: 25 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1. RATED CURRENT : 3A
RATED VOLTAGE : 250V AC
4-2.INSULATION RESISTANCE: 1000MΩ MIN
4-3.CONTACT RESISTANCE : 20mΩ MAX
4-4.WITHSTANDING VOLTAGE: 1000V AC
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+105°C.
6.PACKING QUANTITY:10000PCS
7.P/N: A2036 T 1 F X-X
SERIES NO: _____
CONNECTOR: _____
TYPE CODE _____
MALE FEMALE: _____
F-FEMALE
M-MALE
PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2036T1FX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd			
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13						
					0.0±0.35	X*REF±6°									
				UNIT:mm	0.00±0.25	X*±3°	DESIGNER	Han_Gao	21.01.13	TITLE: PITCH2.00MM WIRE TO BOARD CRIMP TERMINAL AWG#22~#28	REV: A0		SHEET: 1/1		
				SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Zijun_Huang	21.01.13						
1		2		3		4		5		6		7		8	