












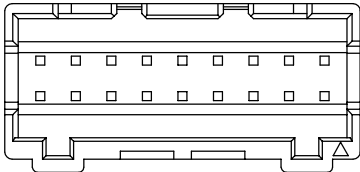

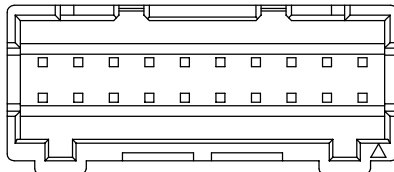
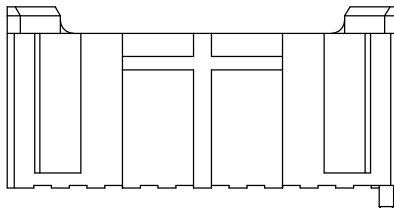

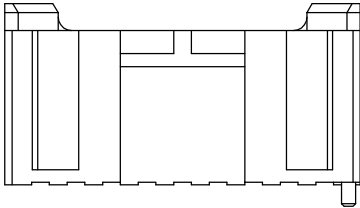
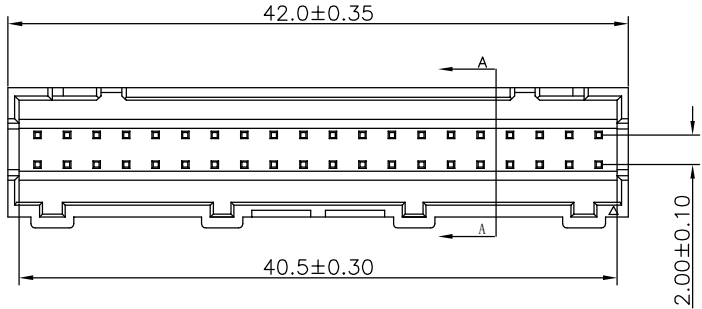


	1	2	3	4	5	6	7	8					
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements													
A	RoHS												
B	     												
C	2*07 2*06 2*05 2*04 2*03 2*02												
D													
E	  												
F	2*09 2*08 2*10~2*16 												
G													
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2038W0-2XX1XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
	A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.26				
	A1	PART NUMBER RENEWAL	23.09.26	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.09.26	TITLE: Pitch 2.0mm 180°PAD双排立插带柱 无LOGO Wafer				
				UNIT:mm	0.00±0.25	X'±3°	DRAWN	Zijun_Huang	23.09.26	REV: A1 SHEET: 2/4			
				SIZE: A4	0.000±0.10	X°X' ±2°							
	1	2	3	4	5	6	7	8					

	1	2	3	4	5	6	7	8
A	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements							
B	RoHS 							
C								NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PBT,UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 1.0KGF/pin min 3-2.DURABILITY: 50 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 3.0A RATED VOLTAGE : 250V AC/DC 4-2.CONTACT RESISTANCE: 20mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 800V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -25°C~+85°C. 6.PACKAGE SPEC: TRAY 7.P/N: A1 A2038 W 0-2 XX 1 X X X SERIES NO: W-0-2-XX-1-XXX CONNECTOR: W-WAFER ANGLE: 0-180° ROW NO: 2-DOUBLE ROW PIN Q'PY: 40PIN MATERIAL: 1-PA66 RoHS COLOR: A-BLACK S-NATURE PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE TIN TERMIPOINT: 1-DIP

