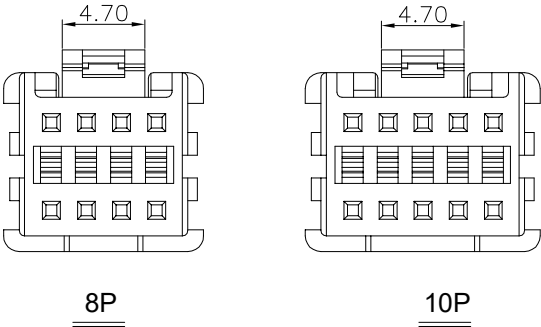
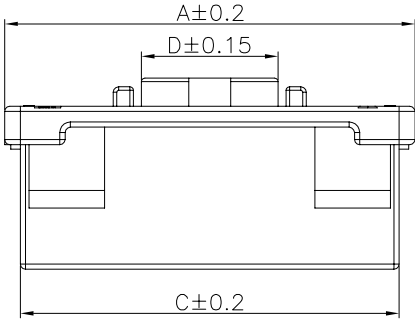
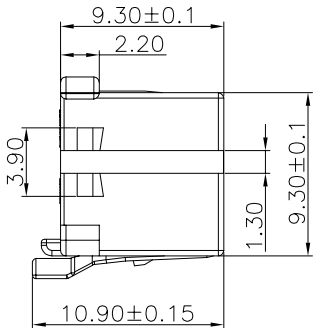
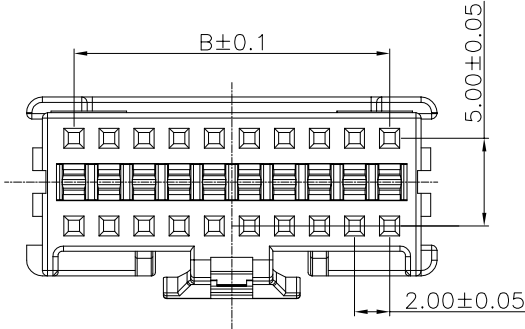
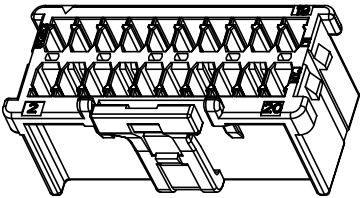
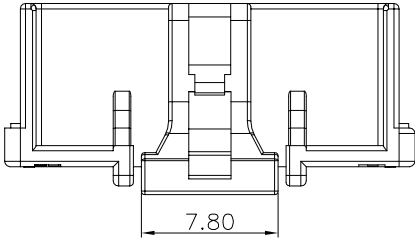


1	2	3	4	5	6	7	8																																																																																																														
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																																																																																					
RoHS+HF																																																																																																																					
					<p>NOTE:</p> <p>1.MATERIAL SPECIFICATION: 1-1.HOUSING: PA66,UL94V-0</p> <p>2.MECHANICAL PERFORMANCE: 2-1.RETENTIVITY FORCE: 1.0KGF/Pin Min 2-2.DURABILITY: 30 CYCLES.</p> <p>3.ELECTRICAL PERFORMANCE: 3-1.CURRENT RATING: 3A RATED VOLTAGE : 250V AC 3-2.CONTACT RESISTANCE: 20 mΩ MAX 3-3.INSULATION RESISTANCE: 1000MΩ Min 3-4.DIELECTRIC WITHSTANDING : 1000V</p> <p>4.ENVIRONMENTAL PERFORMANCE: 4-1.OPERATING TEMPERATURE: -25°C~+85°C.</p> <p>5.PACKAGE SPEC: PE BAG</p> <p>6.P/N:</p> <div><div>A2039 H M-2 XX X 0</div><div>SERIES NO:COLOR: A-BLACK S-NATURE</div><div>CONNECTOR: H-HOUSING PIN Q'PY: 08~40</div><div>MALE FEMALE: M-MALE ROW NO: 1-SINGLE ROW</div></div>																																																																																																																
																																																																																																																					
																																																																																																																					
<table><tr><th rowspan="2">Circuit</th><th colspan="4">Dimensions(mm)</th><th rowspan="2">Circuit</th><th colspan="4">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>2*04</td><td>11.4</td><td>6.0</td><td>9.6</td><td>4.7</td><td>2*13</td><td>29.4</td><td>24.0</td><td>27.6</td><td>7.8</td></tr><tr><td>2*05</td><td>13.4</td><td>8.0</td><td>11.6</td><td>4.7</td><td>2*14</td><td>31.4</td><td>26.0</td><td>29.6</td><td>7.8</td></tr><tr><td>2*06</td><td>15.4</td><td>10.0</td><td>13.6</td><td>7.8</td><td>2*15</td><td>33.4</td><td>28.0</td><td>31.6</td><td>7.8</td></tr><tr><td>2*07</td><td>17.4</td><td>12.0</td><td>15.6</td><td>7.8</td><td>2*16</td><td>35.4</td><td>30.0</td><td>33.6</td><td>7.8</td></tr><tr><td>2*08</td><td>19.4</td><td>14.0</td><td>17.6</td><td>7.8</td><td>2*17</td><td>37.4</td><td>32.0</td><td>35.6</td><td>7.8</td></tr><tr><td>2*09</td><td>21.4</td><td>16.0</td><td>19.6</td><td>7.8</td><td>2*18</td><td>39.4</td><td>34.0</td><td>37.6</td><td>7.8</td></tr><tr><td>2*10</td><td>23.4</td><td>18.0</td><td>21.6</td><td>7.8</td><td>2*19</td><td>41.4</td><td>36.0</td><td>39.6</td><td>7.8</td></tr><tr><td>2*11</td><td>25.4</td><td>20.0</td><td>23.6</td><td>7.8</td><td>2*20</td><td>43.4</td><td>38.0</td><td>41.6</td><td>7.8</td></tr><tr><td>2*12</td><td>27.4</td><td>22.0</td><td>25.6</td><td>7.8</td><td></td><td></td><td></td><td></td><td></td></tr></table>										Circuit	Dimensions(mm)				Circuit	Dimensions(mm)				A	B	C	D	A	B	C	D	2*04	11.4	6.0	9.6	4.7	2*13	29.4	24.0	27.6	7.8	2*05	13.4	8.0	11.6	4.7	2*14	31.4	26.0	29.6	7.8	2*06	15.4	10.0	13.6	7.8	2*15	33.4	28.0	31.6	7.8	2*07	17.4	12.0	15.6	7.8	2*16	35.4	30.0	33.6	7.8	2*08	19.4	14.0	17.6	7.8	2*17	37.4	32.0	35.6	7.8	2*09	21.4	16.0	19.6	7.8	2*18	39.4	34.0	37.6	7.8	2*10	23.4	18.0	21.6	7.8	2*19	41.4	36.0	39.6	7.8	2*11	25.4	20.0	23.6	7.8	2*20	43.4	38.0	41.6	7.8	2*12	27.4	22.0	25.6	7.8					
Circuit	Dimensions(mm)				Circuit	Dimensions(mm)																																																																																																															
	A	B	C	D		A	B	C	D																																																																																																												
2*04	11.4	6.0	9.6	4.7	2*13	29.4	24.0	27.6	7.8																																																																																																												
2*05	13.4	8.0	11.6	4.7	2*14	31.4	26.0	29.6	7.8																																																																																																												
2*06	15.4	10.0	13.6	7.8	2*15	33.4	28.0	31.6	7.8																																																																																																												
2*07	17.4	12.0	15.6	7.8	2*16	35.4	30.0	33.6	7.8																																																																																																												
2*08	19.4	14.0	17.6	7.8	2*17	37.4	32.0	35.6	7.8																																																																																																												
2*09	21.4	16.0	19.6	7.8	2*18	39.4	34.0	37.6	7.8																																																																																																												
2*10	23.4	18.0	21.6	7.8	2*19	41.4	36.0	39.6	7.8																																																																																																												
2*11	25.4	20.0	23.6	7.8	2*20	43.4	38.0	41.6	7.8																																																																																																												
2*12	27.4	22.0	25.6	7.8																																																																																																																	
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="2"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td>PART.NO:</td><td>DWG.NO:</td><td rowspan="2"></td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>22.10.28</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>22.10.28</td><td>A2039HM-2XXX0</td><td>ENDE05</td></tr><tr><td></td><td></td><td></td><td rowspan="2">UNIT:mm</td><td>0.0±0.35</td><td>X'REF±6°</td><td>CHECK</td><td>Han_Gao</td><td>22.10.28</td><td colspan="2" rowspan="2">TITLE: Pitch2.00mm MX双排带扣 Housing</td><td rowspan="2">WanLian Technology Co., Ltd</td></tr><tr><td></td><td></td><td></td><td>0.00±0.25</td><td>X'±3°</td><td>DRAWN</td><td>LanXuan_Hou</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td>REV: A0</td><td>SHEET: 1/1</td></tr></table>										REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		AO	NEW RELEASE	22.10.28	LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	A2039HM-2XXX0	ENDE05				UNIT:mm	0.0±0.35	X'REF±6°	CHECK	Han_Gao	22.10.28	TITLE: Pitch2.00mm MX双排带扣 Housing		WanLian Technology Co., Ltd				0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.10.28				SIZE: A4	0.000±0.10	X'X' ±2°						REV: A0	SHEET: 1/1																																																					
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:																																																																																																											
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	A2039HM-2XXX0	ENDE05																																																																																																											
			UNIT:mm	0.0±0.35	X'REF±6°	CHECK	Han_Gao	22.10.28	TITLE: Pitch2.00mm MX双排带扣 Housing		WanLian Technology Co., Ltd																																																																																																										
				0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.10.28																																																																																																													
			SIZE: A4	0.000±0.10	X'X' ±2°						REV: A0	SHEET: 1/1																																																																																																									
1	2	3	4	5	6	7	8																																																																																																														