
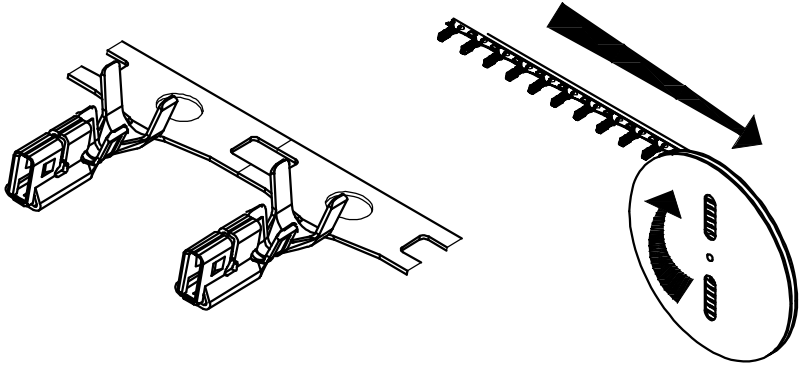



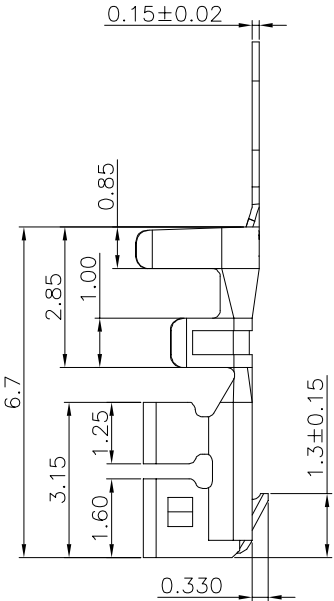


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/Pin Min
3-2.DURABILITY: 30 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3A
RATED VOLTAGE : 250V AC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1000V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC : REEL
7.P/N:

A2039 T F X-X
SERIES NO:
CONNECTOR:
T-TERMINAL
MALE FEMALE:
F-FEMALE
M-MALE
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

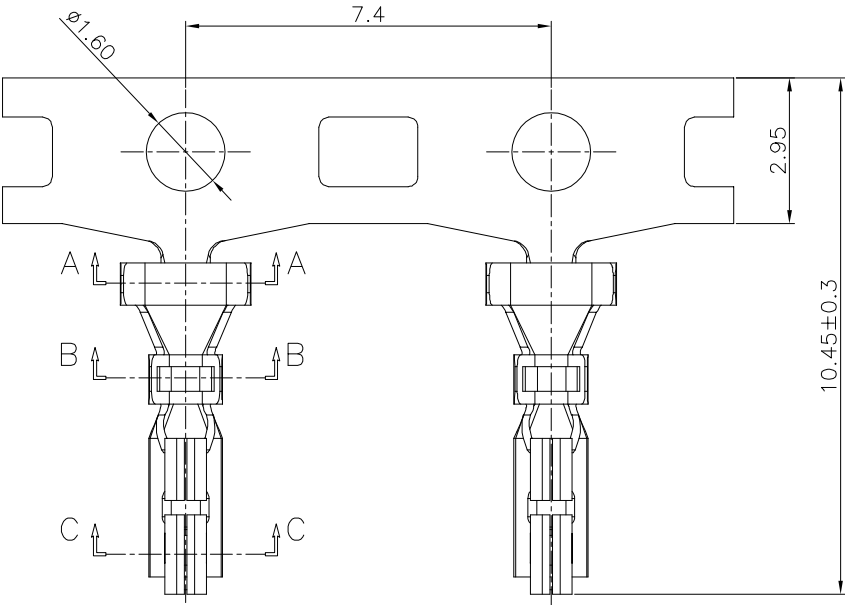

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2039TFX-X	DWG.NO: ENDE05	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28			
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	CHECK	Han_Gao	22.10.28	TITLE: Pitch2.00mm Terminal AWG #22 -#28	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.10.28	REV: A0		SHEET: 1/1