



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



RoHS






8P



10P

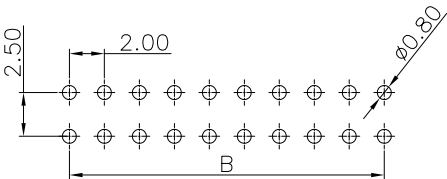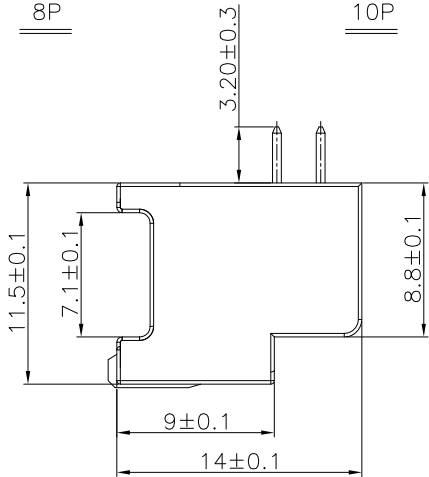

P.C.B LAYOUT
PCB TOLERANCE:±0.05

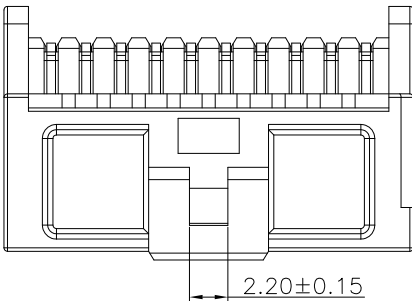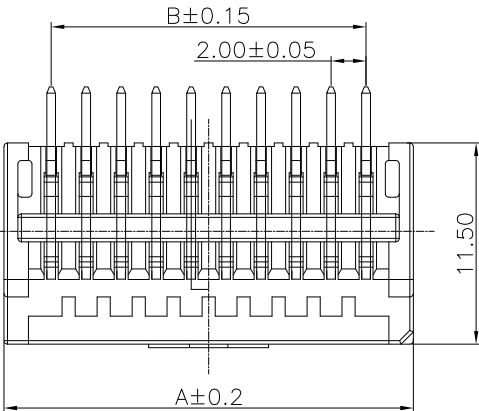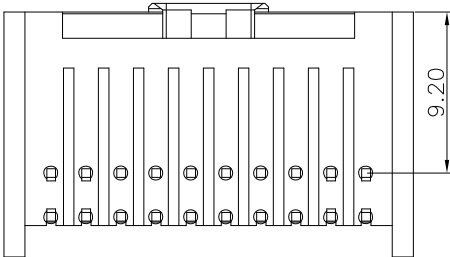

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT,UL94V-0
 - 1-2.CONTACTS: BARSS
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - TIN/GOLD FLASH PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 1.0KGF/Pin Min
 - 3-2.DURABILITY: 30 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 3A AC/DC
 - RATED VOLTAGE : 250V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 1000V
 - 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - 6.PACKAGE SPEC: TRAY
 - 7.P/N:

SERIES NO: A2039 W 9-2 XX 1 X X X

CONNECTOR: W-WAFER

ANGLE: 9-90°

ROW NO: 2-DOUBLE ROW

PIN Q'PY: 08~40

WATER CODE: 0-N/A

COLOR: A-BLACK, K-WHITE

PLATING: A-ALL AU G/F, C-BRIGHT TIN, D-MATTE TIN

TERMIPOINT: 1-DIP

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
2*04	11.4	6.0	2*13	29.4	24.0
2*05	13.4	8.0	2*14	31.4	26.0
2*06	15.4	10.0	2*15	33.4	28.0
2*07	17.4	12.0	2*16	35.4	30.0
2*08	19.4	14.0	2*17	37.4	32.0
2*09	21.4	16.0	2*18	39.4	34.0
2*10	23.4	18.0	2*19	41.4	36.0
2*11	25.4	20.0	2*20	43.4	38.0
2*12	27.4	22.0			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
				LINEAR	ANGLES						
A0	NEW RELEASE	22.10.28		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	22.10.28	A2039W9-2XX1XXX	ENDE05	
				0.00±0.25	X°±3°	CHECK	Han_Gao	22.10.28	TITLE: Pitch 2.0mm 90°MX双排卧插带扣 Wafer		
				0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.10.28			
			UNIT:mm								
			SIZE: A4								

WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1