


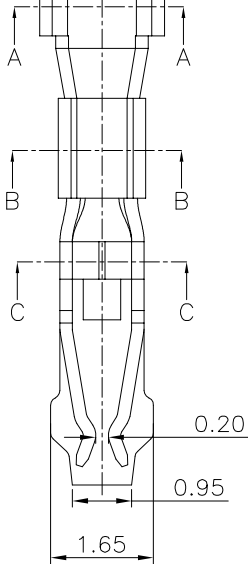
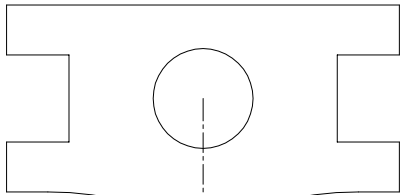
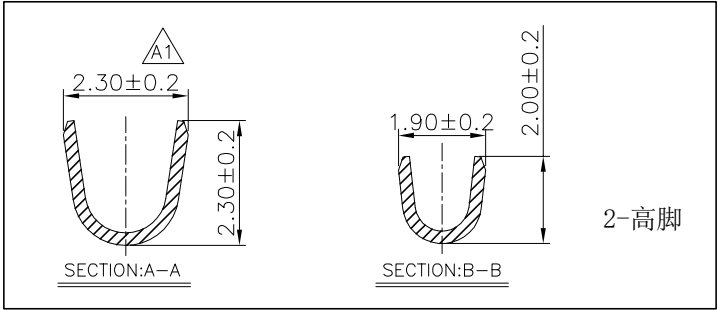


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

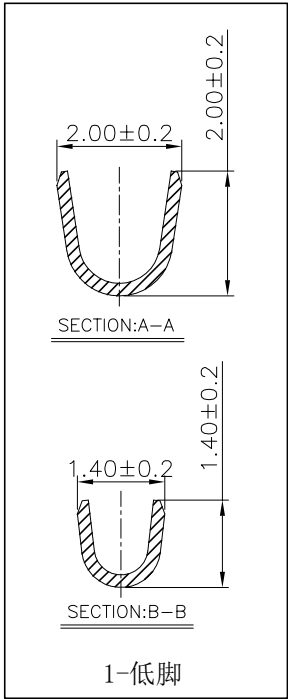


SECTION:C-C

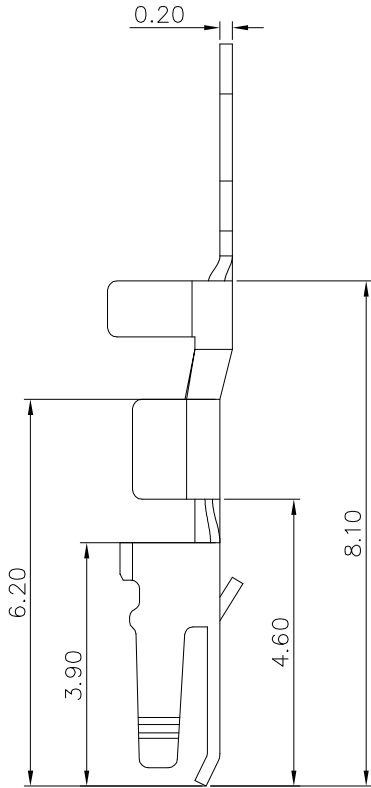

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 6.5A AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 800V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC:REEL
6.P/N:

SERIES NO: A2040 T X F X-X
CONNECTOR: T-TERMINAL
ANGLE: 1-180°低脚
2-180°高脚
PLATING: 1-G/F A1
METAL: P-PHOSPHOR BRONZE
MALE FEMALE: F-FEMALE

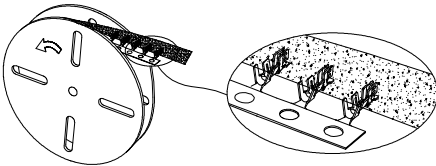

A2040T1FP-X	Phosphor Bronze	AWG#24-26
A2040T2FP-X	Phosphor Bronze	AWG#20-22
PART NO	Material	Wire Range

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2040TXFX-X	DWG.NO: ENDE05		
A0	NEW RELEASE	22.09.08		LINEAR	ANGLES	APPROVED	Wang_jr	23.11.28				
A1	CHANGE TOLERANCE AND PLATING	23.11.28		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.11.28	TITLE: Pitch 2.0mm 高/低脚母端子			
				UNIT:mm	0.00±0.25		X°±3°					
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	23.11.28			REV: A1	SHEET: 1/1