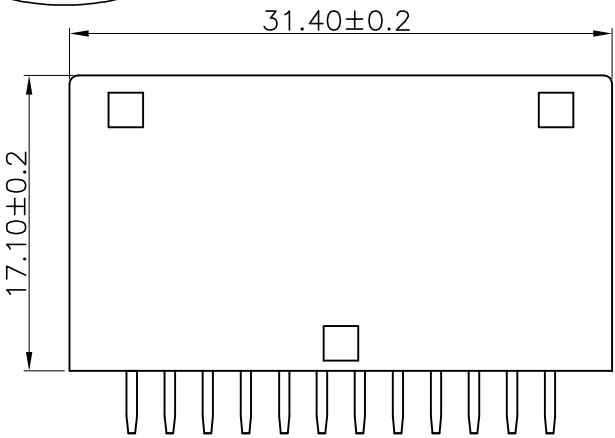
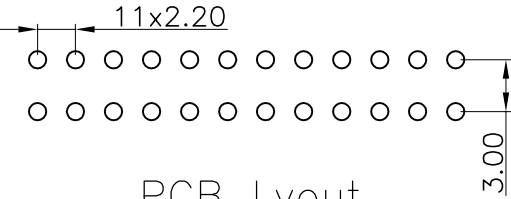
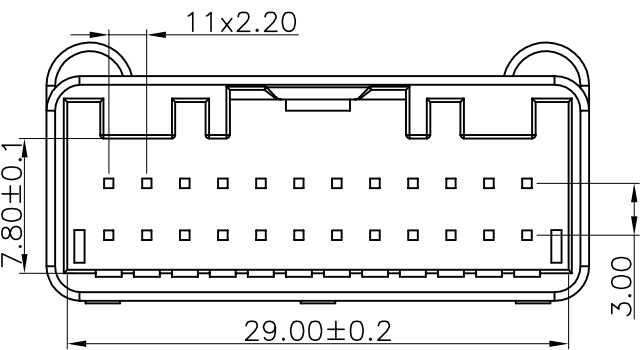
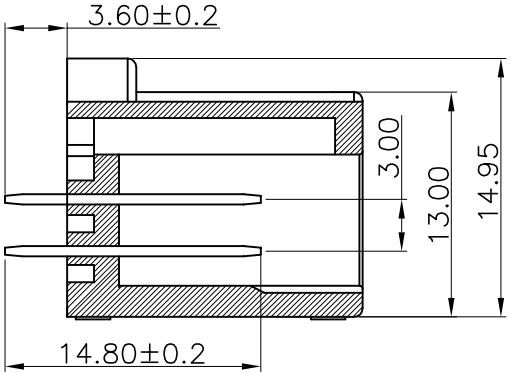


1	2	3	4	5	6	7	8								
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements															
A	RoHS+HF							A							
B					NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING:PA66,UL94V-0 1-2.CONTACTS:BRASS H62 2.PLATING SPECIFICATION: 2-1.CONTACTS:TIN PLATED ON CONTACT AREA. 3.MECHANICAL PERFORMANCE: 3-1.INSERTION FORCE: 1KGF/PIN MAX 3-2.REMOVAL FORCE: 3KGF/PIN MIN 3-3.DURABILITY: 50 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1. RATED CURRENT : 10A RATED VOLTAGE : 250V 4-2.INSULATION RESISTANCE: 1000MΩ MIN CONTACT RESISTANCE : 30mΩ MAX 4-3.WITHSTANDING VOLTAGE:1500V AC 5.ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -40°C~+90°C. 6.PACKAGE SPEC:TRAY 7.P/N:			B							
C			PCB Lyout					C							
D					A1 A2201 W 0-2 24 1 X X 0 SERIES NO: _____ CONNECTOR: _____ W-WAFER ANGLE: _____ 0-180° ROW NO: _____ 2-DOUBLE ROW PIN Q'PY: _____ 24PIN COLOR: K-WHITE PLATING: C-BRIGHE TIN TERMIPOINT: 1-DIP			D							
E								E							
F								F							
G								G							
H	REV.	REVISION RECORD	DATE			SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd		H		
	A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	APPROVED	Wang_jr	23.10.07	A2201W0-2241XX0	ENDE05					
	A1	PART NUMBER RENEWAL	23.10.07	0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	23.10.07	TITLE: PITCH 2.20mm 180° 立插带扣 汽车连接器			REV: A1	SHEET: 1/1		
				UNIT:mm	0.00±0.25	X'±3°									
				SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	23.10.07						
	1	2	3	4	5	6	7	8							