


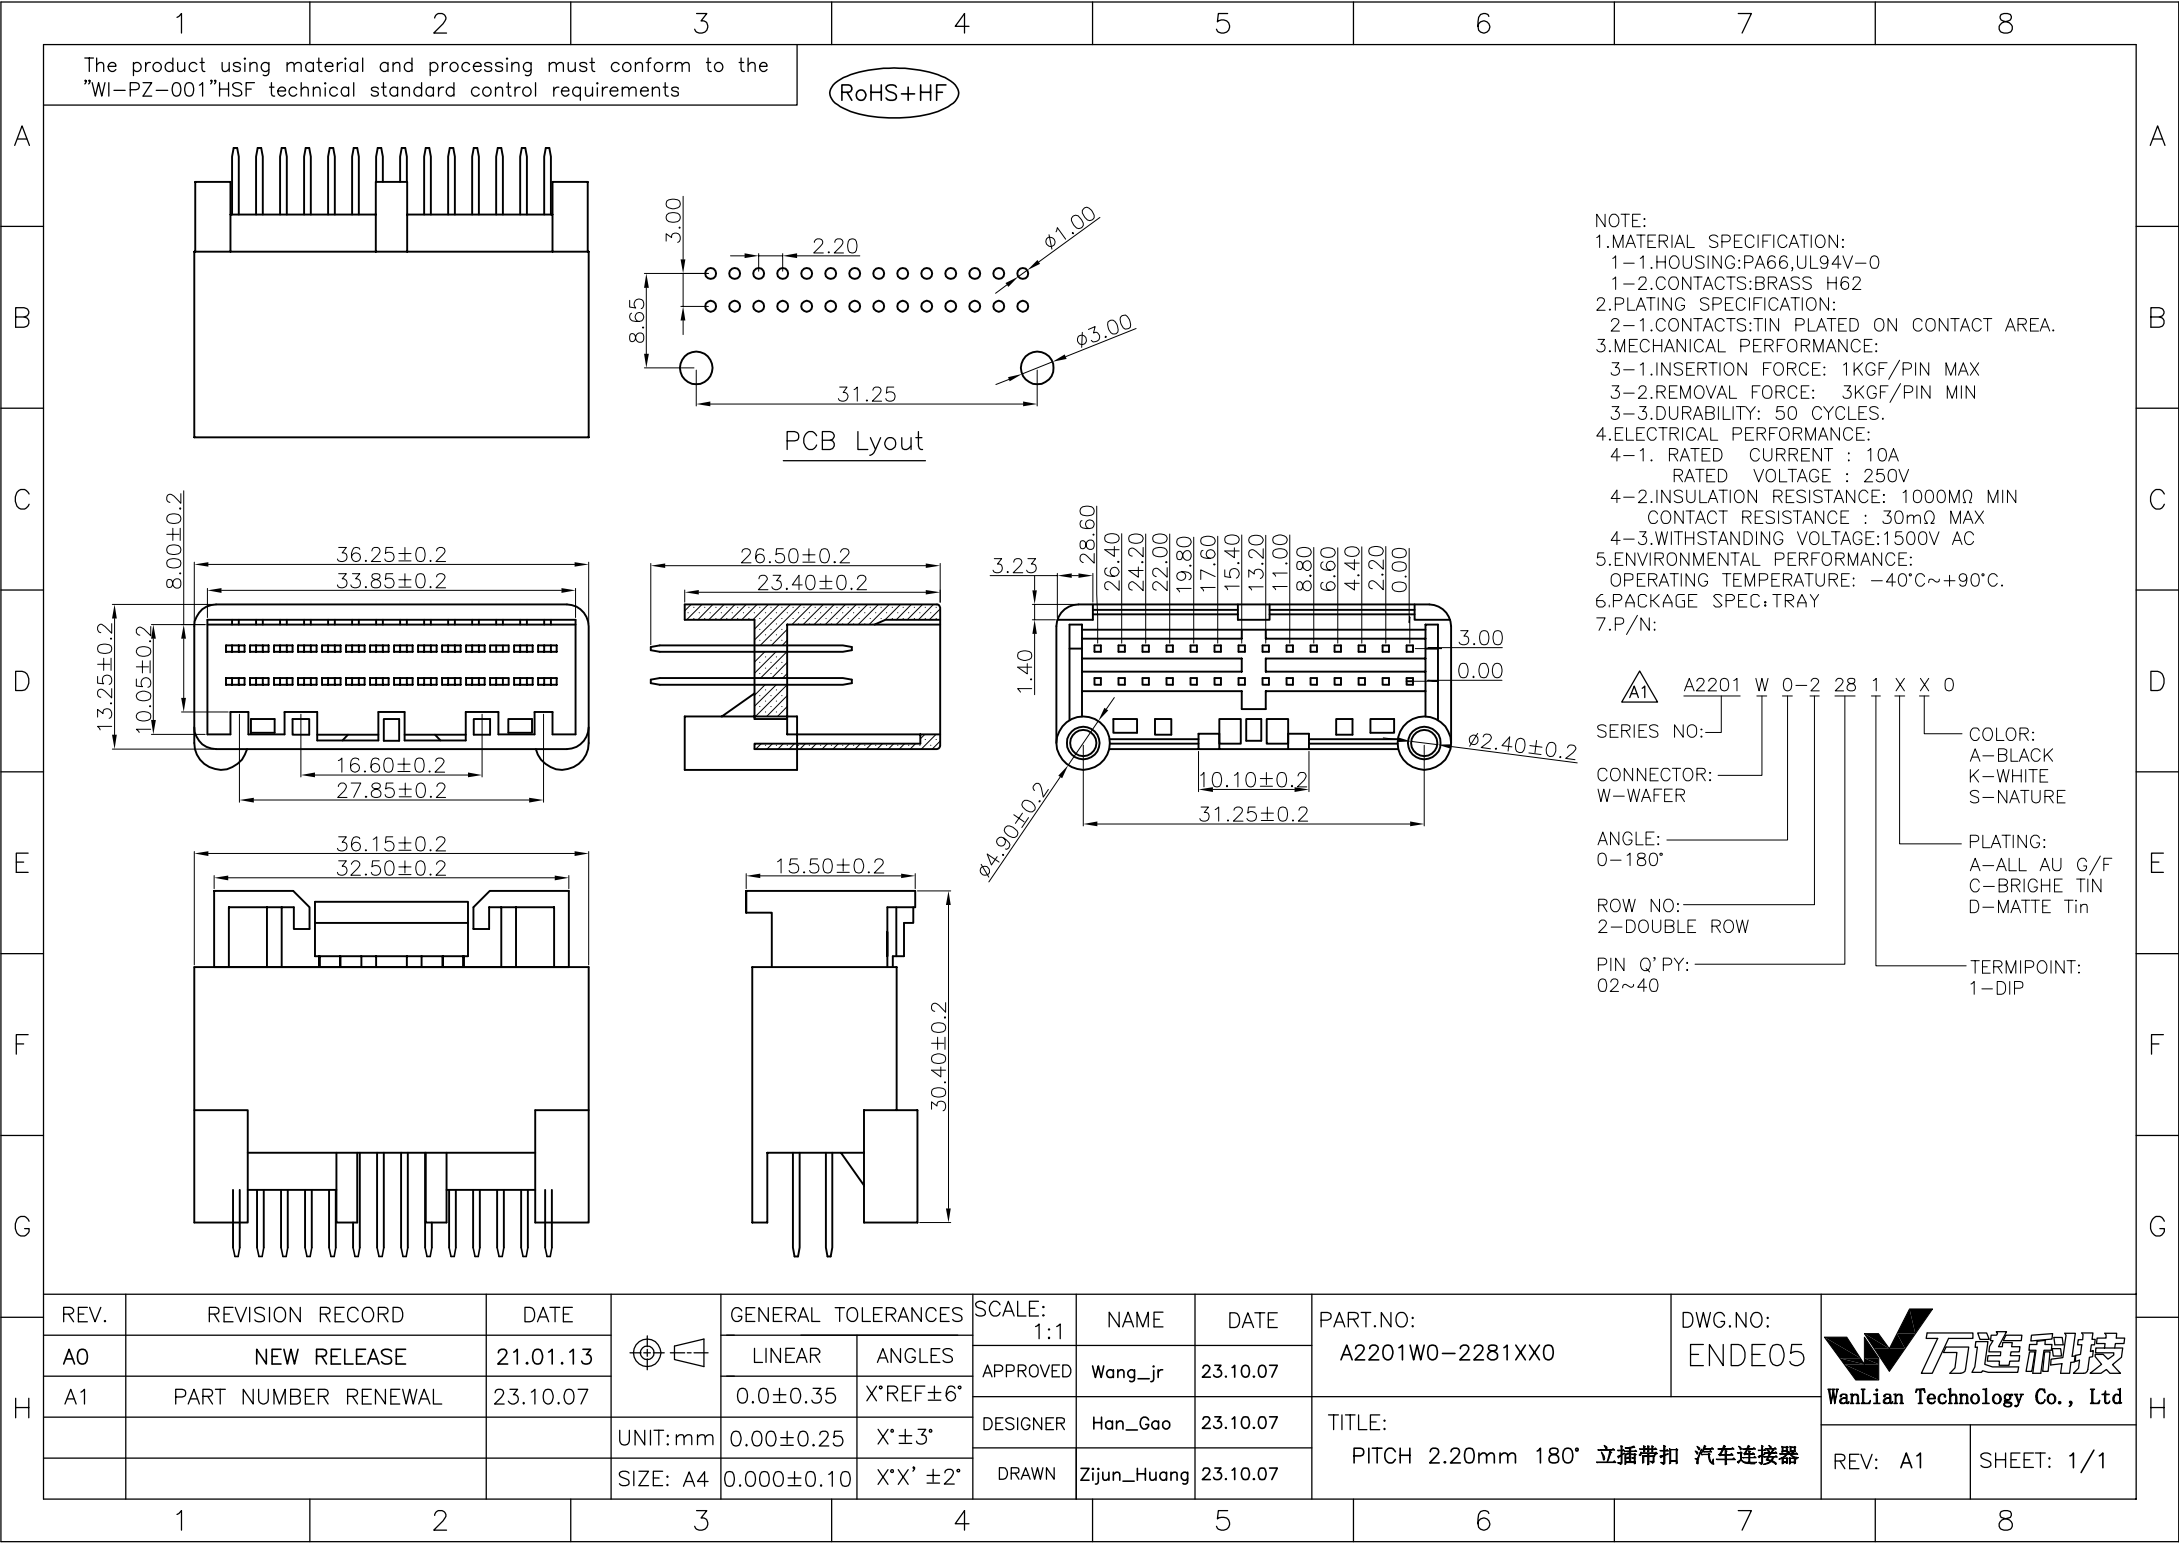

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66,UL94V-0
1-2.CONTACTS:BRASS H62
2.PLATING SPECIFICATION:
2-1.CONTACTS:TIN PLATED ON CONTACT AREA.
3.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 1KGF/PIN MAX
3-2.REMOVAL FORCE: 3KGF/PIN MIN
3-3.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1. RATED CURRENT : 10A
RATED VOLTAGE : 250V
4-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
4-3.WITHSTANDING VOLTAGE:1500V AC
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+90°C.
6.PACKAGE SPEC:TRAY
7.P/N:

△A1 A2201 W 0-2 28 1 X X 0
SERIES NO: A2201 W 0-2 28 1 X X 0
CONNECTOR: W-WAFER
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 02~40
COLOR: A-BLACK K-WHITE S-NATURE
PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin
TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2201W0-2281XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.07				
A1	PART NUMBER RENEWAL	23.10.07		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.10.07	TITLE: PITCH 2.20mm 180° 立插带扣 汽车连接器			
				UNIT:mm	0.00±0.25	X'±3°	DRAWN	Zijun_Huang		23.10.07		
			SIZE: A4	0.000±0.10	X'X' ±2°						REV: A1	SHEET: 1/1