




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS+HF

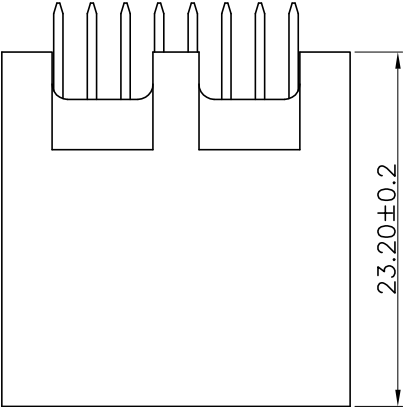


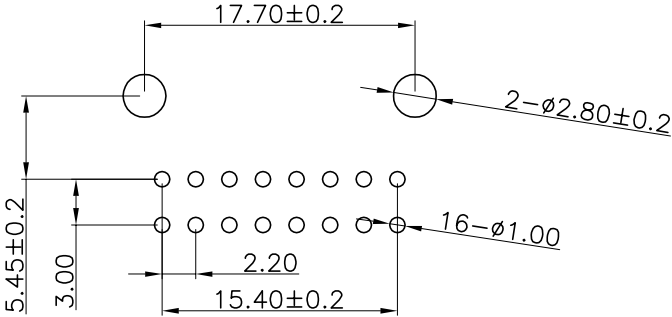

PCB Layout

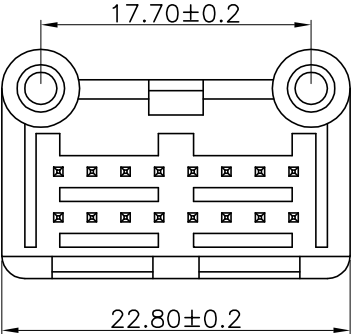

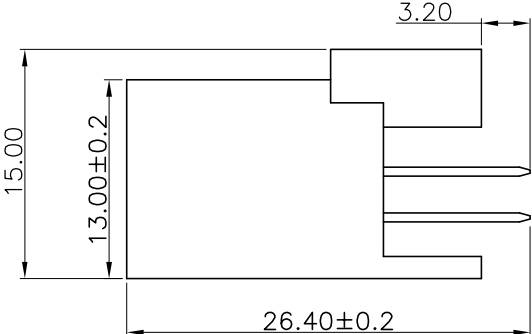

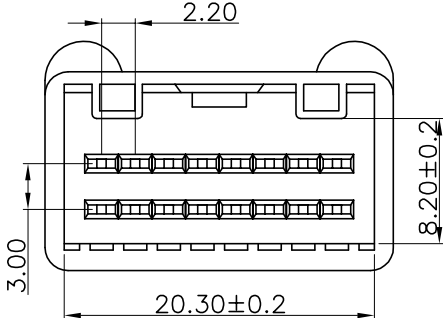

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66,UL94V-0
1-2.CONTACTS:BRASS H62
2.PLATING SPECIFICATION:
2-1.CONTACTS:TIN PLATED ON CONTACT AREA.
3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 10A
RATED VOLTAGE : 250V
3-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
3-3.WITHSTANDING VOLTAGE:1500V AC
4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+90°C.
5.PACKAGE SPEC: TRAY
6.P/N:

A1

SERIES NO:

CONNECTOR:
W-WAFER

ANGLE:
0-180°

TYPE:
1-TYPE 1

ROW NO:
2-DOUBLE ROW

A2201 W 0 1-2 16 1 X X 0

COLOR:
K-WHITE

PLATING:
C-BRIGHE TIN

TERMIPOINT:
1-DIP

PIN Q'PY:
16

H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2201W01-2161XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	H		
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.07						
	A1	PART NUMBER RENEWAL	23.10.07		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.10.07	TITLE: PITCH 2.20mm 180° 立插带扣 汽车连接器	REV: A1			SHEET: 1/1	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	23.10.07						
				SIZE: A4	0.000±0.10	X°X' ±2°									
1		2		3		4		5		6		7		8	