
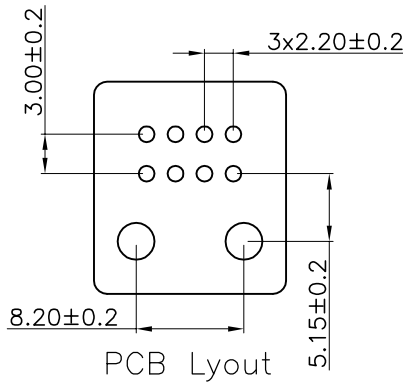
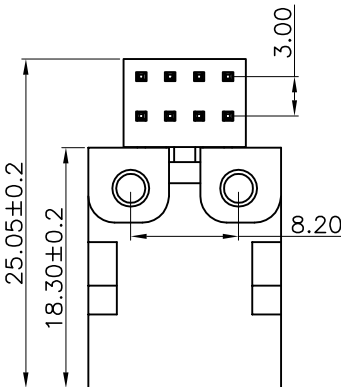



1	2	3	4	5	6	7	8						
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements													
A	RoHS+HF							A					
B					NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING:PA66,UL94V-0 1-2.CONTACTS:BRASS H62 2.PLATING SPECIFICATION: 2-1.CONTACTS:TIN PLATED ON CONTACT AREA. 3.MECHANICAL PERFORMANCE: 3-1.INSERTION FORCE: 1KGF/PIN MAX 3-2.REMOVAL FORCE: 3KGF/PIN MIN 3-3.DURABILITY: 50 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1. RATED CURRENT : 10A RATED VOLTAGE : 250V 4-2.INSULATION RESISTANCE: 1000MΩ MIN CONTACT RESISTANCE : 30mΩ MAX 4-3.WITHSTANDING VOLTAGE:1500V AC 5.ENVIRONMENTAL PERFORMANCE: OPERATING TEMPERATURE: -40°C~+90°C. 6.PACKAGE SPEC:TRAY 7.P/N: A2201 W 9-2 08 1 X X 0 SERIES NO: CONNECTOR: W-WAFER ANGLE: 9-90° ROW NO: 2-DOUBLE ROW PIN Q'PY: 02~40 COLOR: K-WHITE PLATING: C-BRIGHE TIN TERMIPOINT: 1-DIP			B					
C			PCB Lyout					C					
D								D					
E											E		
F								F					
G								G					
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
	A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.07	A2201W9-2081XX0	ENDE05		
	A1	PART NUMBER RENEWAL	23.10.07	UNIT:mm	0.00±0.35	X'REF±6°	DESIGNER	Han_Gao	23.10.07	TITLE: PITCH 2.20mm 90°卧插带扣 汽车连接器		REV: A1	SHEET: 1/1
					0.00±0.25	X'±3°	DRAWN	Zijun_Huang	23.10.07				
	1	2	3	4	5	6	7	8					