
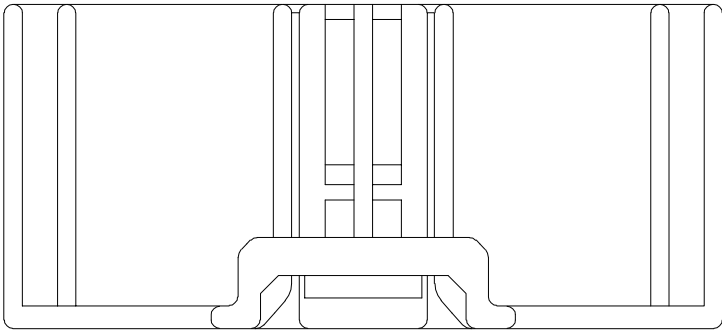
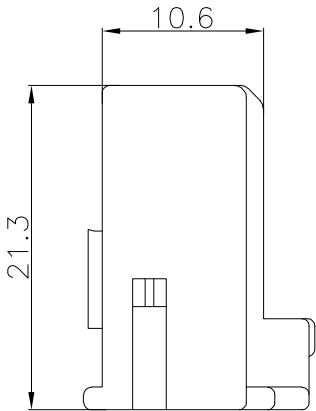


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

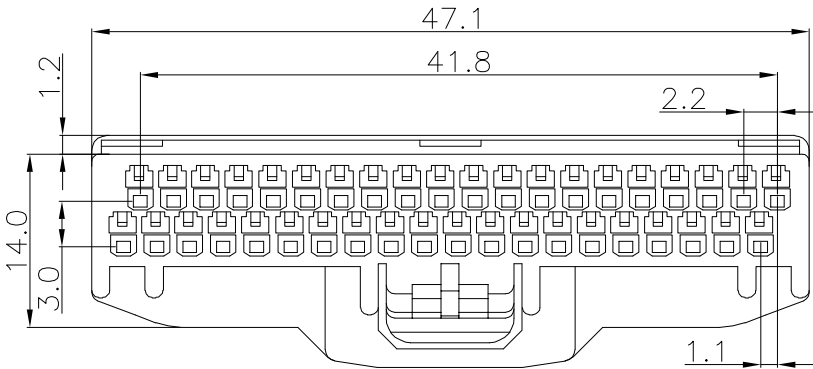

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PBT,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 1.5KGF/Pin Min
2-2.DURABILITY: 50 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A AC/DC
RATED VOLTAGE : 50V AC/DC
3-2.CONTACT RESISTANCE: 50 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

A2202 H M-2 XX X 0
SERIES NO: H M-2 XX X 0
COLOR:
A-BLACK
J-GREY
S-NATURE
CONNECTOR:
H-HOUSING
PIN Q'PY:
40 PIN
MALE FEMALE:
M-MALE
ROW NO:
2-DOUBLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	A2202HM-2XXX0	ENDE05		
			UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.10.28	TITLE: Pitch 2.20mm 40P 双排错位公胶壳		REV: A0	SHEET: 1/1
				0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28				
			SIZE: A4	0.000±0.10	X°X' ±2°							