
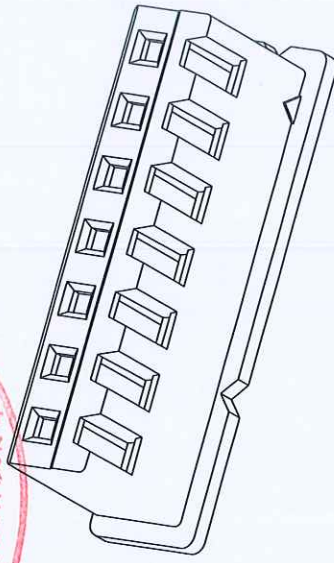


ROHS

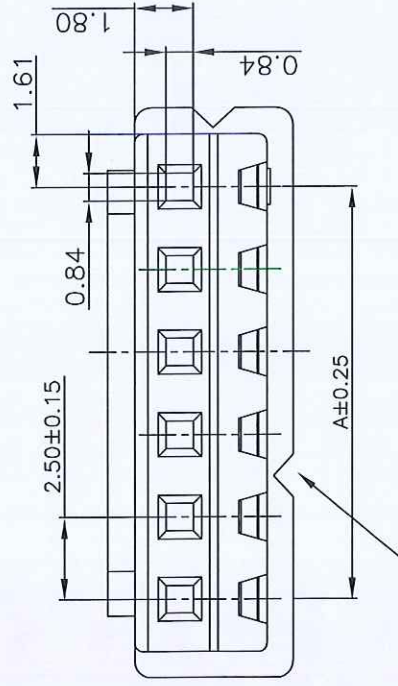

备注: 6P及6P以上有缺口, 具体以PIN位示意图为准

Circuit	A	B	C
2	2.50	5.70	7.30
3	5.00	8.20	9.80
4	7.50	10.70	12.30
5	10.00	13.20	14.80
6	12.50	15.70	17.30
7	15.00	18.20	19.80
8	17.50	20.70	22.30
9	20.00	23.20	24.80
10	22.50	25.70	27.30
11	25.00	28.20	29.80
12	27.50	30.70	32.30
13	30.00	33.20	34.80
14	32.50	35.70	37.30
15	35.00	38.20	39.80
16	37.50	40.70	42.30

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2501H1M-1XXXX	DWG.NO: ENDE05
				LINEAR	ANGLES					
A0	NEW RELEASE	21.01.13				APPROVED		23.08.14		
A1	ADD PIN BIT SCHEMATIC	23.08.14		0.0±0.35	X°REF±6'	DESIGNER		23.08.14	TITLE:	
			UNIT:mm	0.00±0.25	X°±3'				Pitch 2.50mm 180°XH HOUSING	
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN		23.08.14		



WanLian Technology Co., Ltd


REV: A1

SHEET: 1/2

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

PIN位示意图

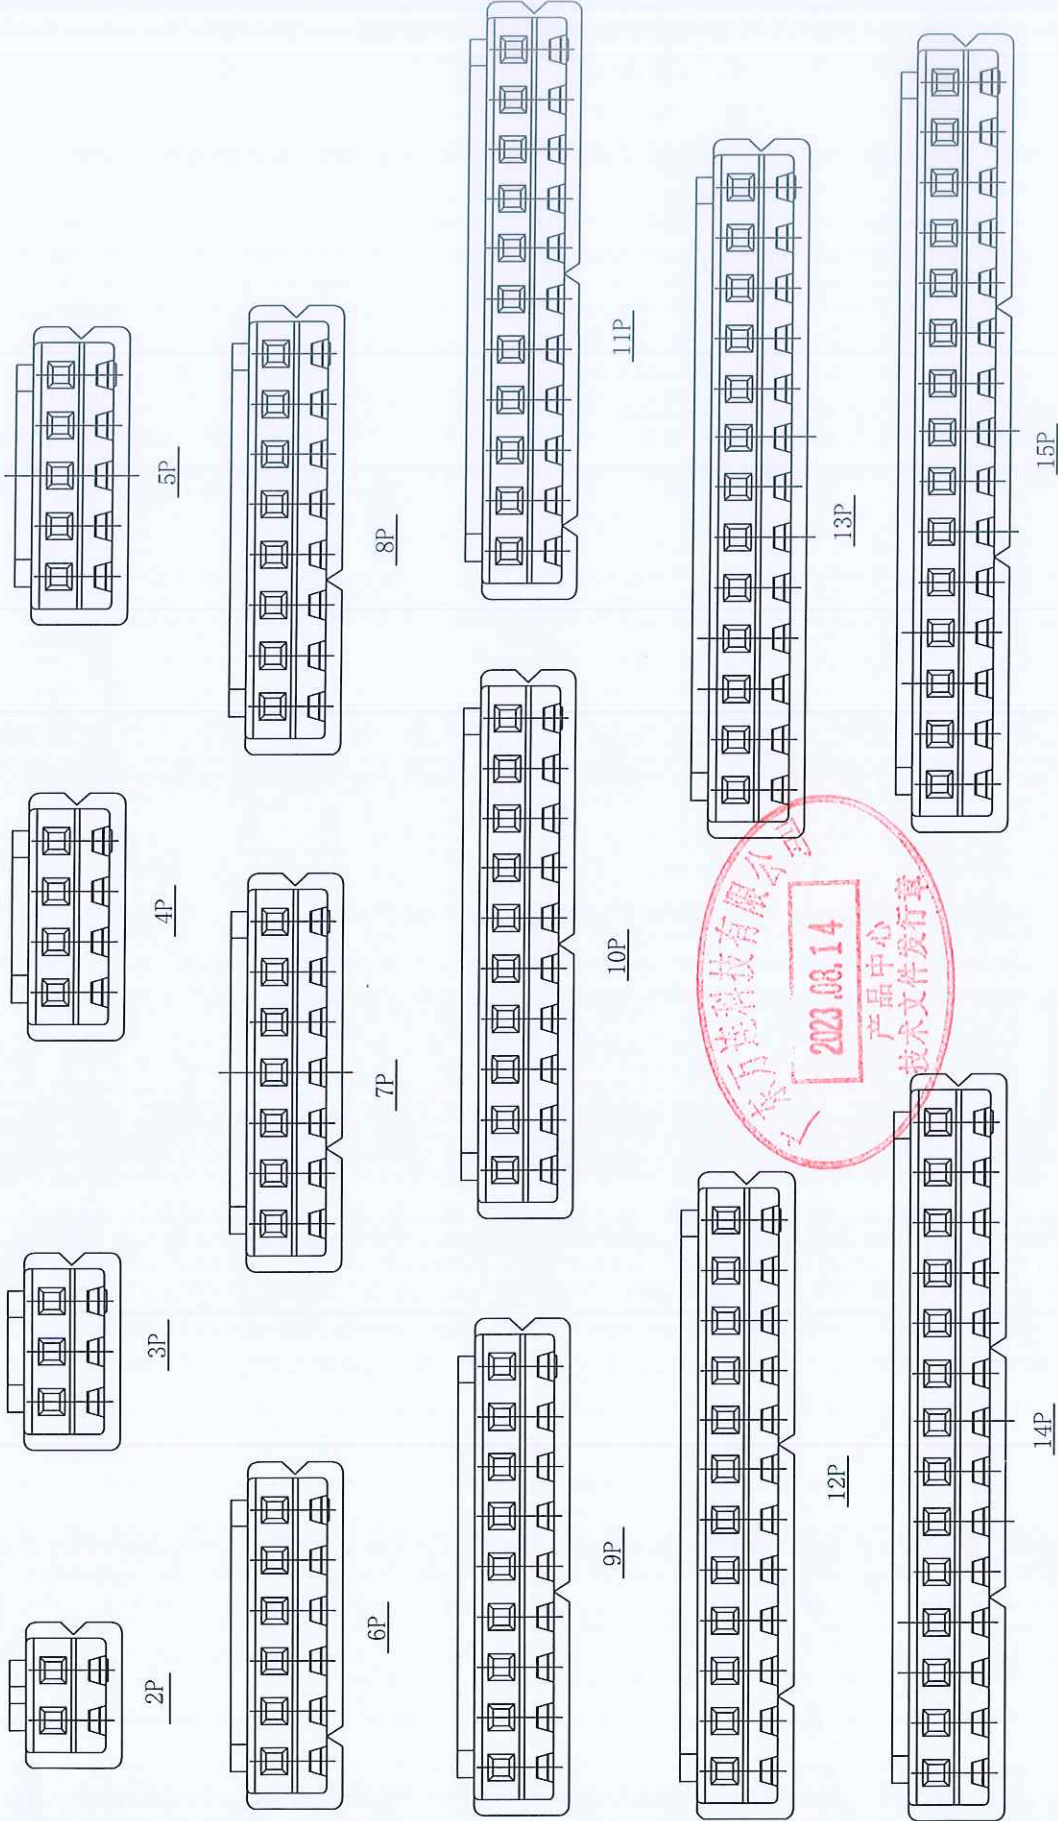

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.01.13	LINEAR 0.0±0.35	1:1 APPROVED		23.08.14	A2501H1M-1XXXX	ENDE05		
A1	ADD PIN BIT SCHEMATIC	23.08.14	ANGLES X'REF±6°	DESIGNER		23.08.14	TITLE: Pitch 2.50mm 180°XH HOUSING			
			UNIT: mm SIZE: A4 0.000±0.10	DRAWN		23.08.14			REV: A1	SHEET: 2/2


WanLian Technology Co., Ltd