

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

A

RoHS

B

C




D

E

F




G

H

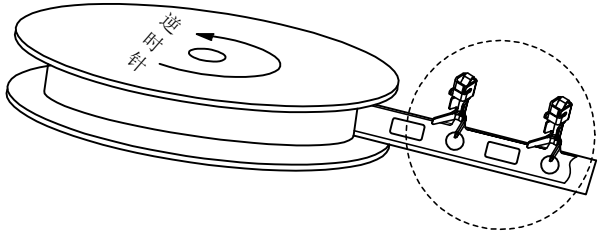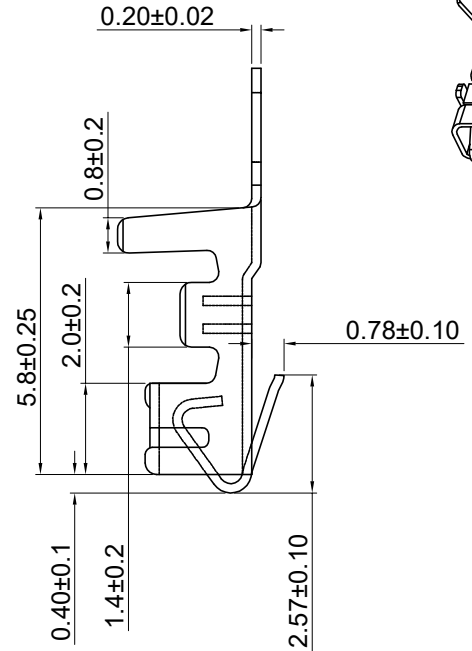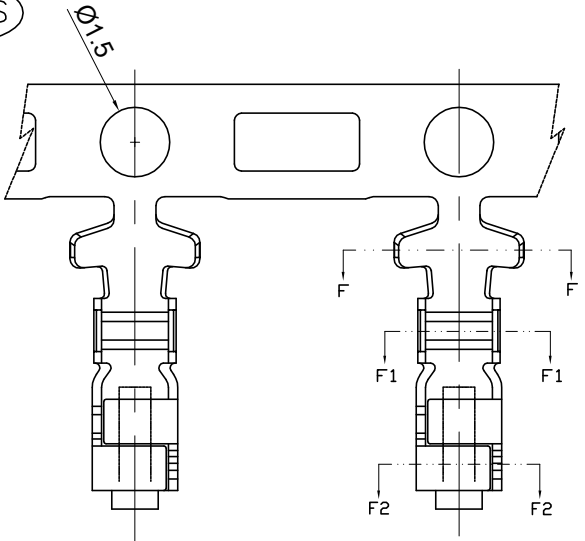

电镀后收料方向

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:SN PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 2.0Kg/Min
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3.0A
4-2.VOLTAGE RATING: 250V MAX
4-3.CONTACT RESISTANCE: 20mΩ Max.
4-4.INSULATION RESISTANCE: 1000MΩ MIN
4-5.DIELECTRIC WITHSTANDING VOLTAGE:1000V AC Min
5.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC: REEL
7.P/N ORDER:

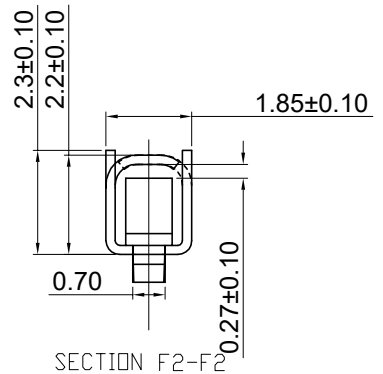

SERIES NO: A2501 T 1 F X-X
CONNECTOR: T-TERMINAL
TYPE CODE: X-X
MALE FEMALE: F-FEMALE, M-MALE
PLATING: 1-G/F, A-ALL AU G/F, C-BRIGHE TIN, D-MATTE TIN
METAL: P-PHOSPHOR BRONZE, B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2501T1FX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	TITLE: Pitch 2.50mm 180°XH TERMINAL			
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13				
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang				21.01.13
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0	SHEET: 1/1