


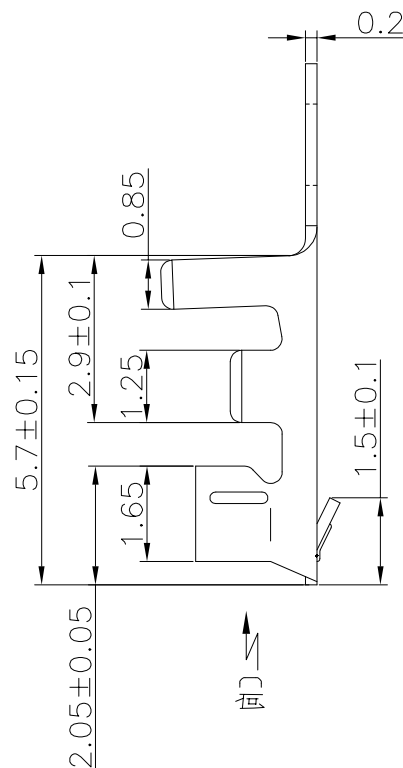


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

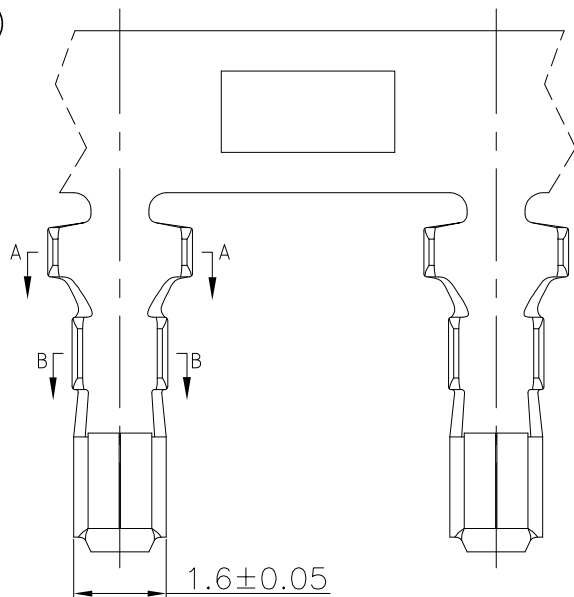

SECTION:A-A
SCALE:1:1



SECTION: B-B
SCALE: 1:1



〔向〕

NOTE:

1.MATERIAL SPECIFICATION:

1-1.T-TERMINAL: Phosphor Bronze

2.PLATING SPECIFICATION:

2-1.T-TERMINAL:

TIN/GOLD FLASH PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:

3-1.RETENTIVITY FORCE: 1.5kgf/PIN MIN

3-2.DURABILITY: 25 CYCLES.

4.ELECTRICAL PERFORMANCE:

4-1.CURRENT RATING: 3A

RATED VOLTAGE : 250V AC/DC

4-2.CONTACT RESISTANCE: 10 mΩ MAX

4-3.INSULATION RESISTANCE: 1000 MΩ Min

4-4.DIELECTRIC WITHSTANDING : 800V

5.ENVIRONMENTAL PERFORMANCE:

5-1.OPERATING TEMPERATURE: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

6.PACKAGE SPEC:PAPER PLATE

7.P/N:

A2502 T F X-X

SERIES NO:

CONNECTOR:

T-TERMINAL

— PLATING:

A-ALL AU G/F

C-BRIGHT TIN

D-MATTE TIN

MALE FEMALE:-

F—FEMALE

M—MALE

—METAL:

P-PHOSPHOR BRONZE

B-BRASS

Ordering Information & Specifications

Wire Range	Insulation O.D.	Qty/ree
AWG#22-#30	1.90mm(max)	10,000pcs

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2502TFX-X	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12			
				0.0±0.35	X*REF±6°						
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch2.50 mm EH端子AWG#22~#30		
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.10.12			
									REV: AO	SHEET: 1/1	