
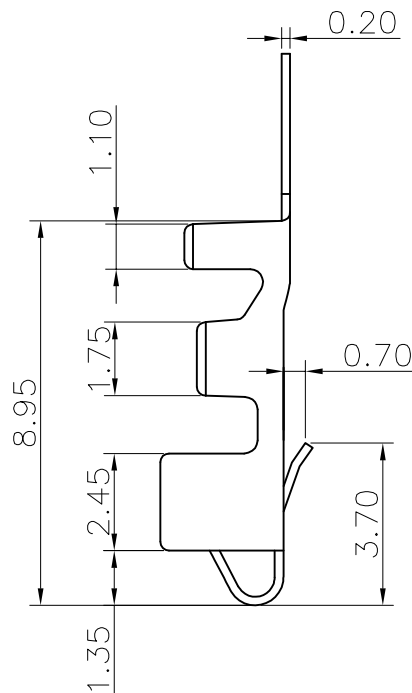


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

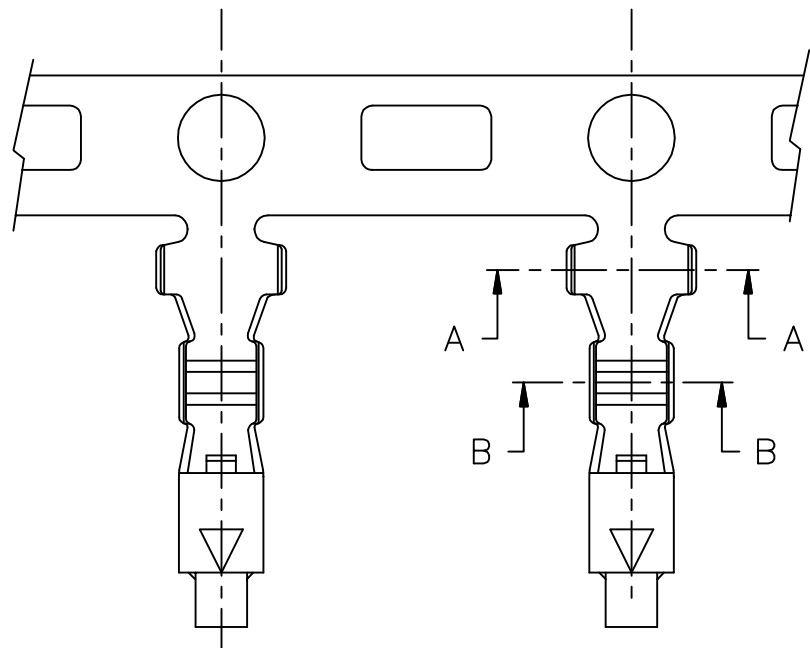

NOTE:

1.MATERIAL SPECIFICATION:

1-1.CONTACTS: PHOSPHOR BRONZE

2.PLATING SPECIFICATION:

2-1.CONTACTS:

TIN/GOLD FLASH PLATED OVER ALL.

3.WIRE RANGE:AWG#22~28

4.ELECTRICAL PERFORMANCE:

4-1.CURRENT RATING: 3A

RATED VOLTAGE : 250V AC/DC

4-2.CONTACT RESISTANCE: 10 mΩ MAX

4-3.INSULATION RESISTANCE: 500 MΩ Min




4-4.DIELECTRIC WITHSTANDING : 1500V

5.ENVIRONMENTAL PERFORMANCE:

5-1.OPERATING TEMPERATURE: -25°C~+85°C.

6.P/N:

SERIES NO: A2504 T 1 F X-X
CONNECTOR: T-TERMINAL
1-TYPE CODE
MALE FEMALE:
F-FEMALE
M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

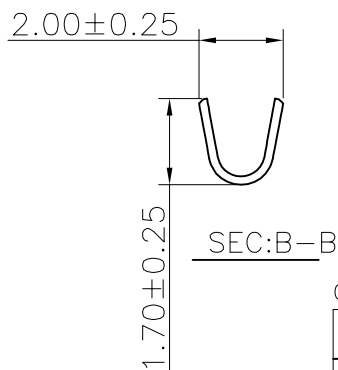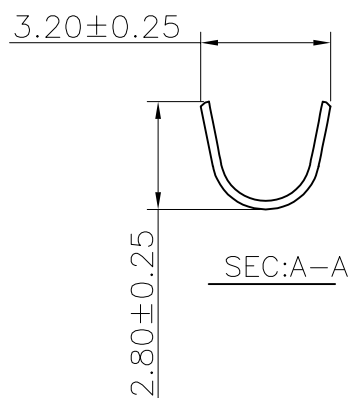

ORDERING INFORMATION&SPECIFICATIONS

WIRE RANGE	INSULATION O.D.	MATERIAL(SHRAPNEL)	FINISH(TERMINAL)	Q'TY/BAG
AWG#22-#28	1.80mm (MAX)	PHOSPHOR BRONZE	TIN-PLATED	5000PCS

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12	A2504T1FX-X	ENDE05	
				0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE:		REV: A0
				0.00±0.25	X'±3°	DRAWN	Zijun_Huang	21.10.12	Pitch2.50mm 母端子		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°						