

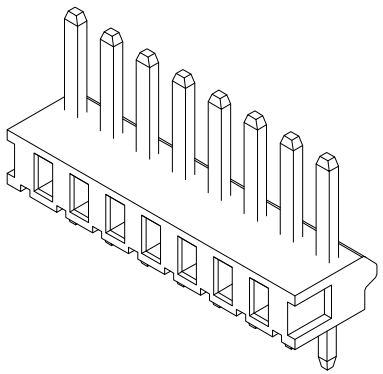


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS



NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

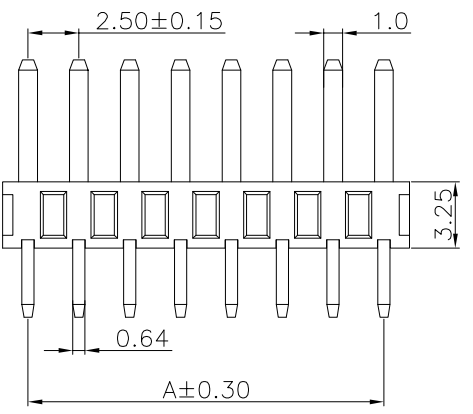

A1

SERIES NO:

CONNECTOR:

ANGLE:

ROW NO:

PIN Q'PY:

A2504

W

0-1

XX

1

X

X

X

WATER CODE

0-N/A

COLOR:

A-BLACK R-RED

G-BLUE

S-NATURE

PLATING:



A-ALL AU G/F

C-BRIGHE TIN

D-MATTE Tin

TERMIPOINT:

1-DIP

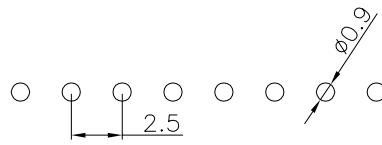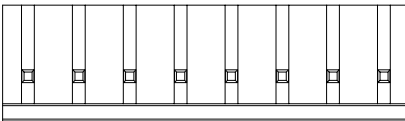

PCB Layout

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	2.5	5.0	10	22.5	25.0
03	5.0	7.5	11	25.0	27.5
04	7.5	10.0	12	27.5	30.0
05	10.0	12.5	13	30.0	32.5
06	12.5	15.0	14	32.5	35.0
07	15.0	17.5	15	35.0	37.5
08	17.5	20.0	16	37.5	40.0
09	20.0	22.5			