


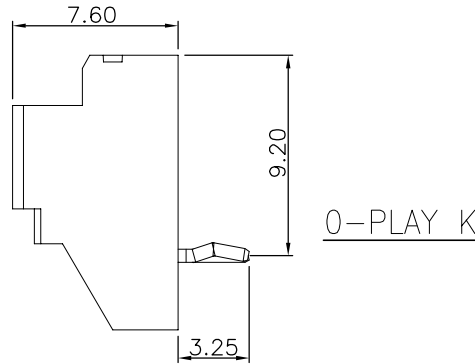

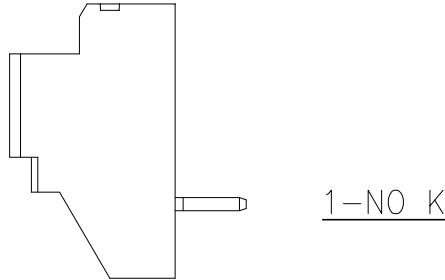


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

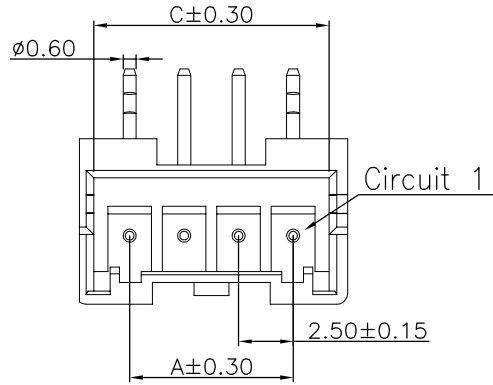

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA46,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

SERIES NO: A2508 W 9 1-1 XX 1 X X X
CONNECTOR: W-WAFER
ANGLE: 9-90°
TYPE: 1-TYPE 1
ROW NO: 1-SINGLE ROW
PIN Q'PY: 02~15
TYPE: 0-PLAY K
1-NO K
COLOR: A-BLACK
S-NATURE
PLATING: C-BRIGHE TIN
TERMIPOINT: 1-DIP

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	2.50	7.5	5.80	09	20.00	25.0	23.30
03	5.00	10.0	8.30	10	22.50	27.5	25.80
04	7.50	12.5	10.80	11	25.00	30.0	28.30
05	10.00	15.0	13.30	12	27.50	32.5	30.80
06	12.50	17.5	15.80	13	30.00	35.0	33.30
07	15.00	20.0	18.30	14	32.50	37.5	35.80
08	17.50	22.5	20.80	15	35.00	40.0	38.30

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2508W91-1XX1XXX	DWG.NO: ENDE05		
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.18				
A1	PART NUMBER RENEWAL	23.09.18		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.09.18	TITLE: Pitch 2.50mm XA 90° 单排 Wafer 打K 带 定位墙			
				UNIT:mm	0.00±0.25	X°±3°						
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	23.09.18			REV: A1	SHEET: 1/1

WanLian Technology Co., Ltd