

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

A

B

C

D

E




F

G


H

RoHS


3P




6P-15P

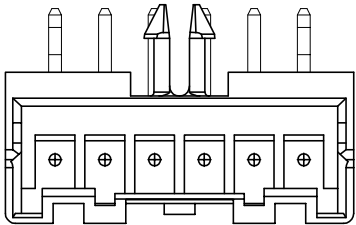


5P



4P






2P



NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66+GF,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

△ A1 A2508 W 9 4-1 XX 1 X X 2
SERIES NO: _____
CONNECTOR: _____
W-WAFER
ANGLE: _____
9-90°
TYPE: _____
4-TYPE 4
ROW NO: _____
1-SINGLE ROW
COLOR:
A-BLACK
S-NATURE
PLATING:
C-BRIGHE TIN
TERMIPOINT:
1-DIP
PIN Q' PY:
02~15



Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.50	9P	20.00	25.00
3P	5.00	10.00	10P	22.50	27.50
4P	7.50	12.50	11P	25.00	30.00
5P	10.00	15.00	12P	27.50	32.50
6P	12.50	17.50	13P	30.00	35.00
7P	15.00	20.00	14P	32.50	37.50
8P	17.50	22.50	15P	35.00	40.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2508W94-1XX1XX2	DWG.NO: ENDE05	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.12			
A1	PART NUMBER RENEWAL	23.09.12		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.09.12	TITLE: Pitch 2.50mm XA 90° 单排 Wafer 打K 带定位墙 带柱		
			UNIT:mm	0.00±0.25	X*±3°		DRAWN	LanXuan_Hou		23.09.12	
			SIZE: A4	0.000±0.10	X*X' ±2°					REV: A1	