


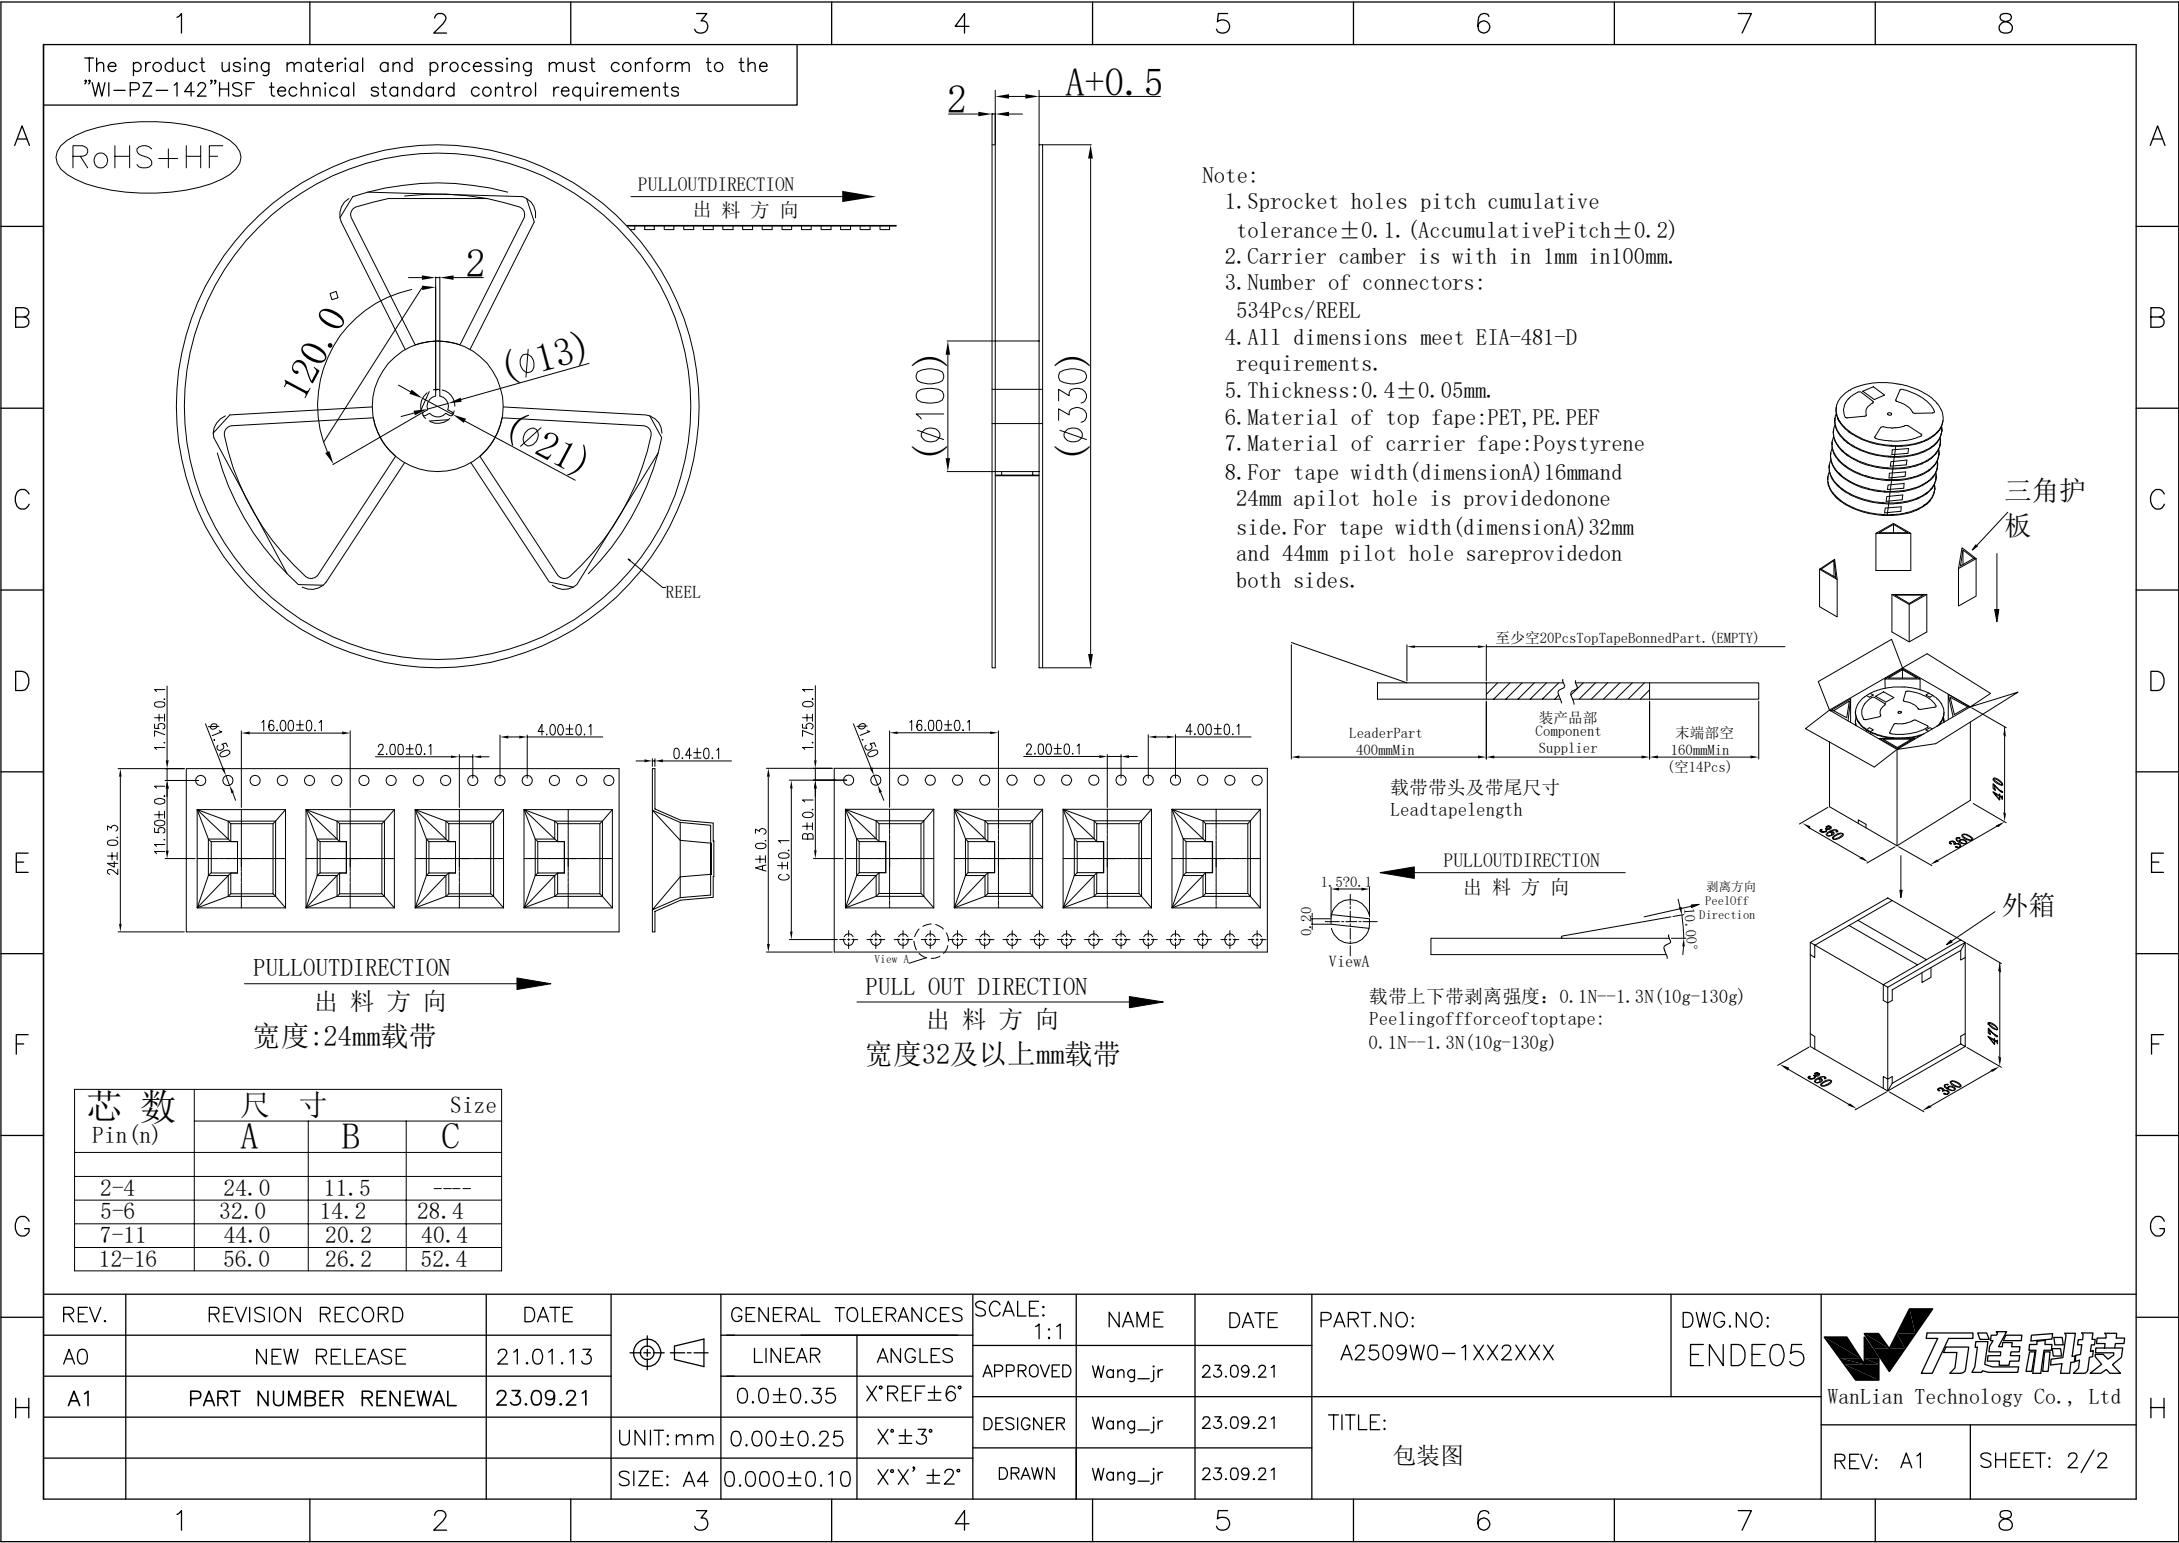

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements


RoHS+HF

PULLOUTDIRECTION
出料方向


2 A+0.5

(Φ100)
(Φ330)


- Note:
- 1.Sprocket holes pitch cumulative tolerance±0.1. (AccumulativePitch±0.2)
 - 2.Carrier camber is with in 1mm in100mm.
 - 3.Number of connectors: 534Pcs/REEL
 - 4.All dimensions meet EIA-481-D requirements.
 - 5.Thickness:0.4±0.05mm.
 - 6.Material of top fape:PET, PE, PEF
 - 7.Material of carrier fape:Poystyrene
 - 8.For tape width (dimensionA) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimensionA) 32mm and 44mm pilot hole sare provided on both sides.

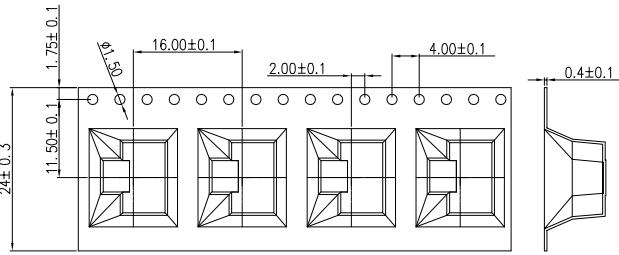


PULLOUTDIRECTION
出料方向
宽度:24mm载带

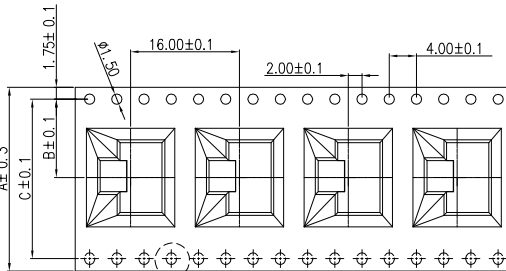


PULL OUT DIRECTION
出料方向
宽度32及以上mm载带

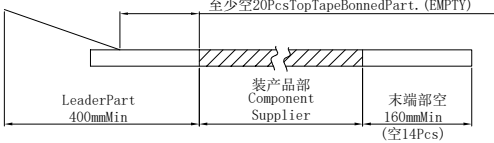

载带带头及带尾尺寸
Lead tape length

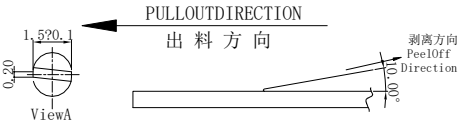

载带上下带剥离强度: 0.1N—1.3N (10g-130g)
Peeling off force of top tape: 0.1N—1.3N (10g-130g)

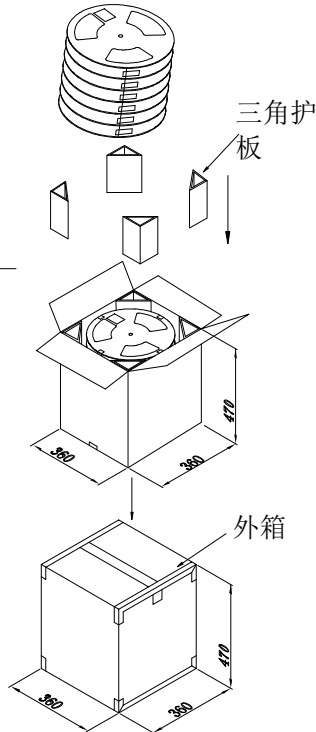

芯数 Pin(n)	尺寸 Size		
	A	B	C
2-4	24.0	11.5	---
5-6	32.0	14.2	28.4
7-11	44.0	20.2	40.4
12-16	56.0	26.2	52.4

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2509W0-1XX2XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.21			
A1	PART NUMBER RENEWAL	23.09.21		0.0±0.35	X°REF±6°				DESIGNER	Wang_jr	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Wang_jr			
			SIZE: A4	0.000±0.10	X°X' ±2°	REV: A1			SHEET: 2/2		

万连科技
WanLian Technology Co., Ltd