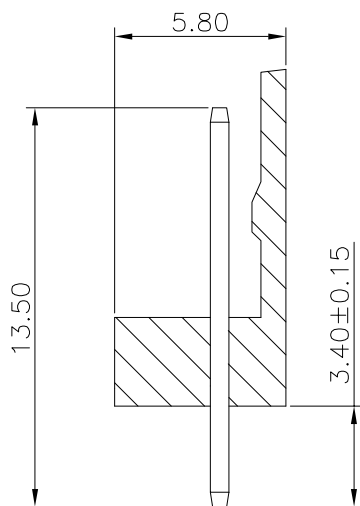
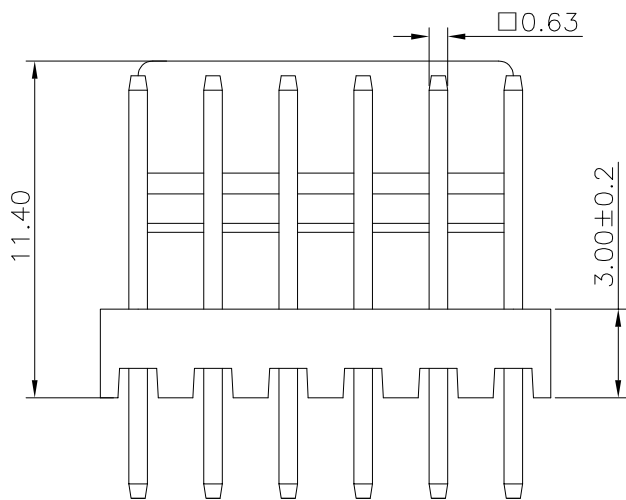
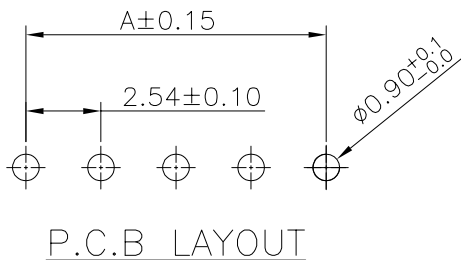
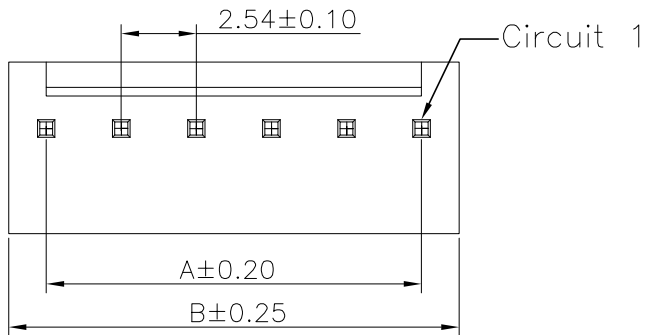


NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 1.5KGF/pin min
 - 3-2.DURABILITY: 50 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 3A
RATED VOLTAGE : 250V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 1000V
- 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 6.PACKAGE SPEC: PE BAG
- 7.P/N:

[illegible]

Ordering Information & Dimensions					
Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02P	---	5.08	12P	27.94	30.48
03P	5.08	7.62	13P	30.48	33.02
04P	7.62	10.16	14P	33.02	35.56
05P	10.16	12.70	15P	35.56	38.10
06P	12.70	15.24	16P	38.10	40.64
07P	15.24	17.78	17P	40.64	43.18
08P	17.78	20.32	18P	43.18	45.72
09P	20.32	22.86	19P	45.72	48.26
10P	22.86	25.40	20P	48.26	50.80
11P	25.40	27.94			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2544W0-1XX1XX0	DWG.NO: ENDE05		
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.27				
A1	Modify the size	23.03.31		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.09.27	TITLE: Pitch 2.54mm 单排180° 立插全靠背 Wafer			
A2	PART NUMBER RENEWAL	23.09.27		UNIT: mm	0.00±0.25	X°±3°	DRAWN	LX_HOU		23.09.27		
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A2	SHEET: 1/1