


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

Circuit 1

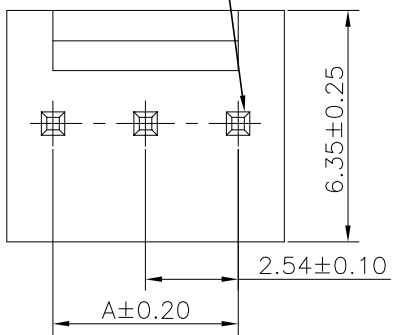


2.54±0.10

6.35±0.25

A±0.20

P.C.B LAYOUT

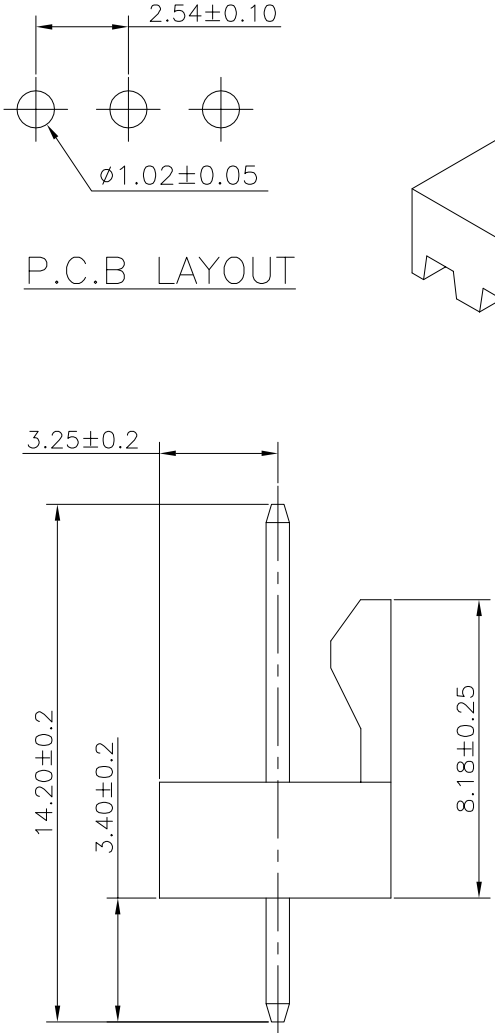

2.54±0.10


3.25±0.2

14.20±0.2

3.40±0.2

3.18±0.2

8.18±0.25

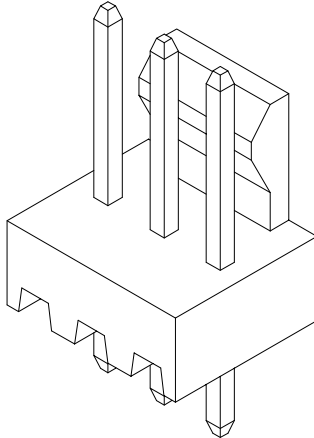

NOTE:

1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 4A
RATED VOLTAGE : 250V AC/DC
3-2.CONTACT RESISTANCE: 10 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

A2

A2544

W

0

2-1

XX

1

X

X

0

SERIES NO:

CONNECTOR:
W-WAFER

ANGLE:
0-180°

TYPE:
2-TYPE 2

ROW NO:
1-SINGLE ROW

COLOR:
A-BLACK
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin

TERMPIPOINT:
1-DIP

PIN Q' PY:
02~20

Ordering Information & Dimensions

Circuit	Dimensions		Circuit	Dimensions	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			