
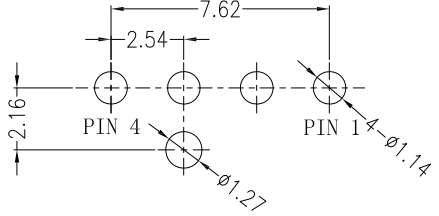
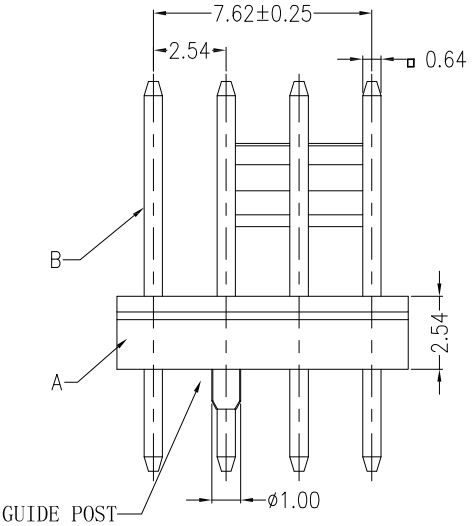
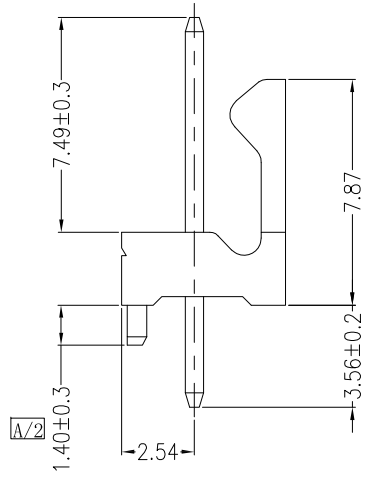



1	2	3	4	5	6	7	8																																															
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																						
A	RoHS+HF						NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: LCP,UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 1.2KGF/pin min 3-2.DURABILITY: 50 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 4A RATED VOLTAGE : 250V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 750V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC:PE BAG 7.P/N:																																															
B																																																						
C																																																						
D																																																						
E					A2544 W 0 3-1 XX 1 X X 0 SERIES NO: W CONNECTOR: W-WAFER ANGLE: 0-180° TYPE: 3-TYPE 3 ROW NO: 1-SINGLE ROW PIN Q'PY: 02~04 WATER CODE: 0-N/A COLOR: A-BLACK S-NATURE PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin TERMIPOINT: 1-DIP																																																	
F																																																						
G																																																						
H	<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>21.10.12</td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>		REV.	REVISION RECORD	DATE	AO	NEW RELEASE	21.10.12							<table><tr><td colspan="2">GENERAL TOLERANCES</td></tr><tr><td>LINEAR</td><td>ANGLES</td></tr><tr><td>0.0±0.35</td><td>X'REF±6°</td></tr><tr><td>0.00±0.25</td><td>X'±3°</td></tr><tr><td>0.000±0.10</td><td>X'X' ±2°</td></tr></table>		GENERAL TOLERANCES		LINEAR	ANGLES	0.0±0.35	X'REF±6°	0.00±0.25	X'±3°	0.000±0.10	X'X' ±2°	<table><tr><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td></tr><tr><td>APPROVED</td><td>Wang_jr</td><td>21.10.12</td></tr><tr><td>DESIGNER</td><td>Han_Gao</td><td>21.10.12</td></tr><tr><td>DRAWN</td><td>Zijun_Huang</td><td>21.10.12</td></tr></table>		SCALE: 1:1	NAME	DATE	APPROVED	Wang_jr	21.10.12	DESIGNER	Han_Gao	21.10.12	DRAWN	Zijun_Huang	21.10.12	<table><tr><td>PART.NO:</td><td>DWG.NO:</td></tr><tr><td>A2544W03-1XX1XX0</td><td>ENDE05</td></tr><tr><td colspan="2">TITLE: Pitch 2.54mm 单排180° 立插半靠背带柱 Wafer</td></tr></table>		PART.NO:	DWG.NO:	A2544W03-1XX1XX0	ENDE05	TITLE: Pitch 2.54mm 单排180° 立插半靠背带柱 Wafer		<table><tr><td colspan="2">WanLian Teconology Co., Ltd</td></tr><tr><td>REV: AO</td><td>SHEET: 1/1</td></tr></table>		WanLian Teconology Co., Ltd		REV: AO	SHEET: 1/1
REV.	REVISION RECORD	DATE																																																				
AO	NEW RELEASE	21.10.12																																																				
GENERAL TOLERANCES																																																						
LINEAR	ANGLES																																																					
0.0±0.35	X'REF±6°																																																					
0.00±0.25	X'±3°																																																					
0.000±0.10	X'X' ±2°																																																					
SCALE: 1:1	NAME	DATE																																																				
APPROVED	Wang_jr	21.10.12																																																				
DESIGNER	Han_Gao	21.10.12																																																				
DRAWN	Zijun_Huang	21.10.12																																																				
PART.NO:	DWG.NO:																																																					
A2544W03-1XX1XX0	ENDE05																																																					
TITLE: Pitch 2.54mm 单排180° 立插半靠背带柱 Wafer																																																						
WanLian Teconology Co., Ltd																																																						
REV: AO	SHEET: 1/1																																																					
1	2	3	4	5	6	7	8																																															