

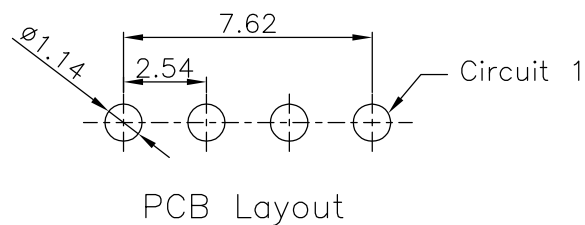
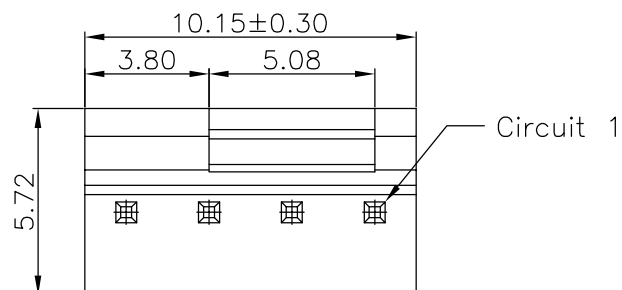


(RoHS

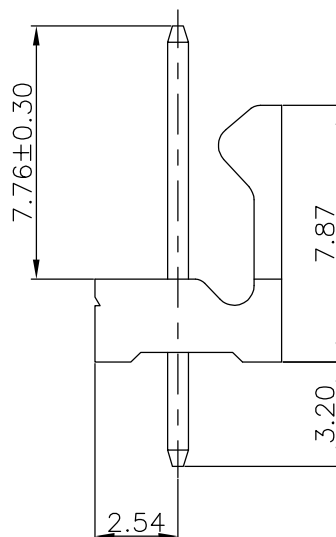

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: PA66, UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 4A
RATED VOLTAGE : 250V AC/DC
 - 3-2. CONTACT RESISTANCE: 10 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING : 1000V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -25°C~+85°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

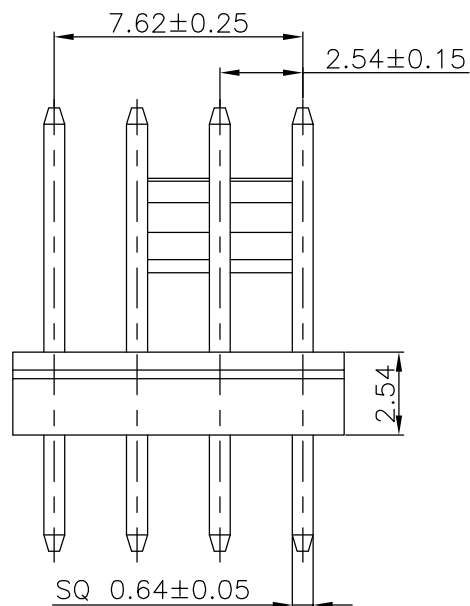

A2544 W 0 5-1 04 1 X X 0
 SERIES NO: _____
 CONNECTOR: _____
 W-WAFER
 ANGLE: _____
 0-180°
 TYPE: _____
 5-TYPE 5
 ROW NO: _____
 1-SINGLE ROW
 COLOR:
 A-BLACK
 K-WHITE
 PLATING:
 A-ALL AU G/F
 C-BRIGHE TIN
 D-MATTE Tin
 TERMIPOINT:
 1-DIP
 PIN Q'PY:
 04PIN

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2544W05-1041XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	21.10.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.13				
				0.0±0.35	X*REF±6°							
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.13	TITLE: Pitch 2.54mm 4P 单排立插短靠背无柱 Wafer	REV: AO		SHEET: 1/1
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LX_HOU	21.10.13				