




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

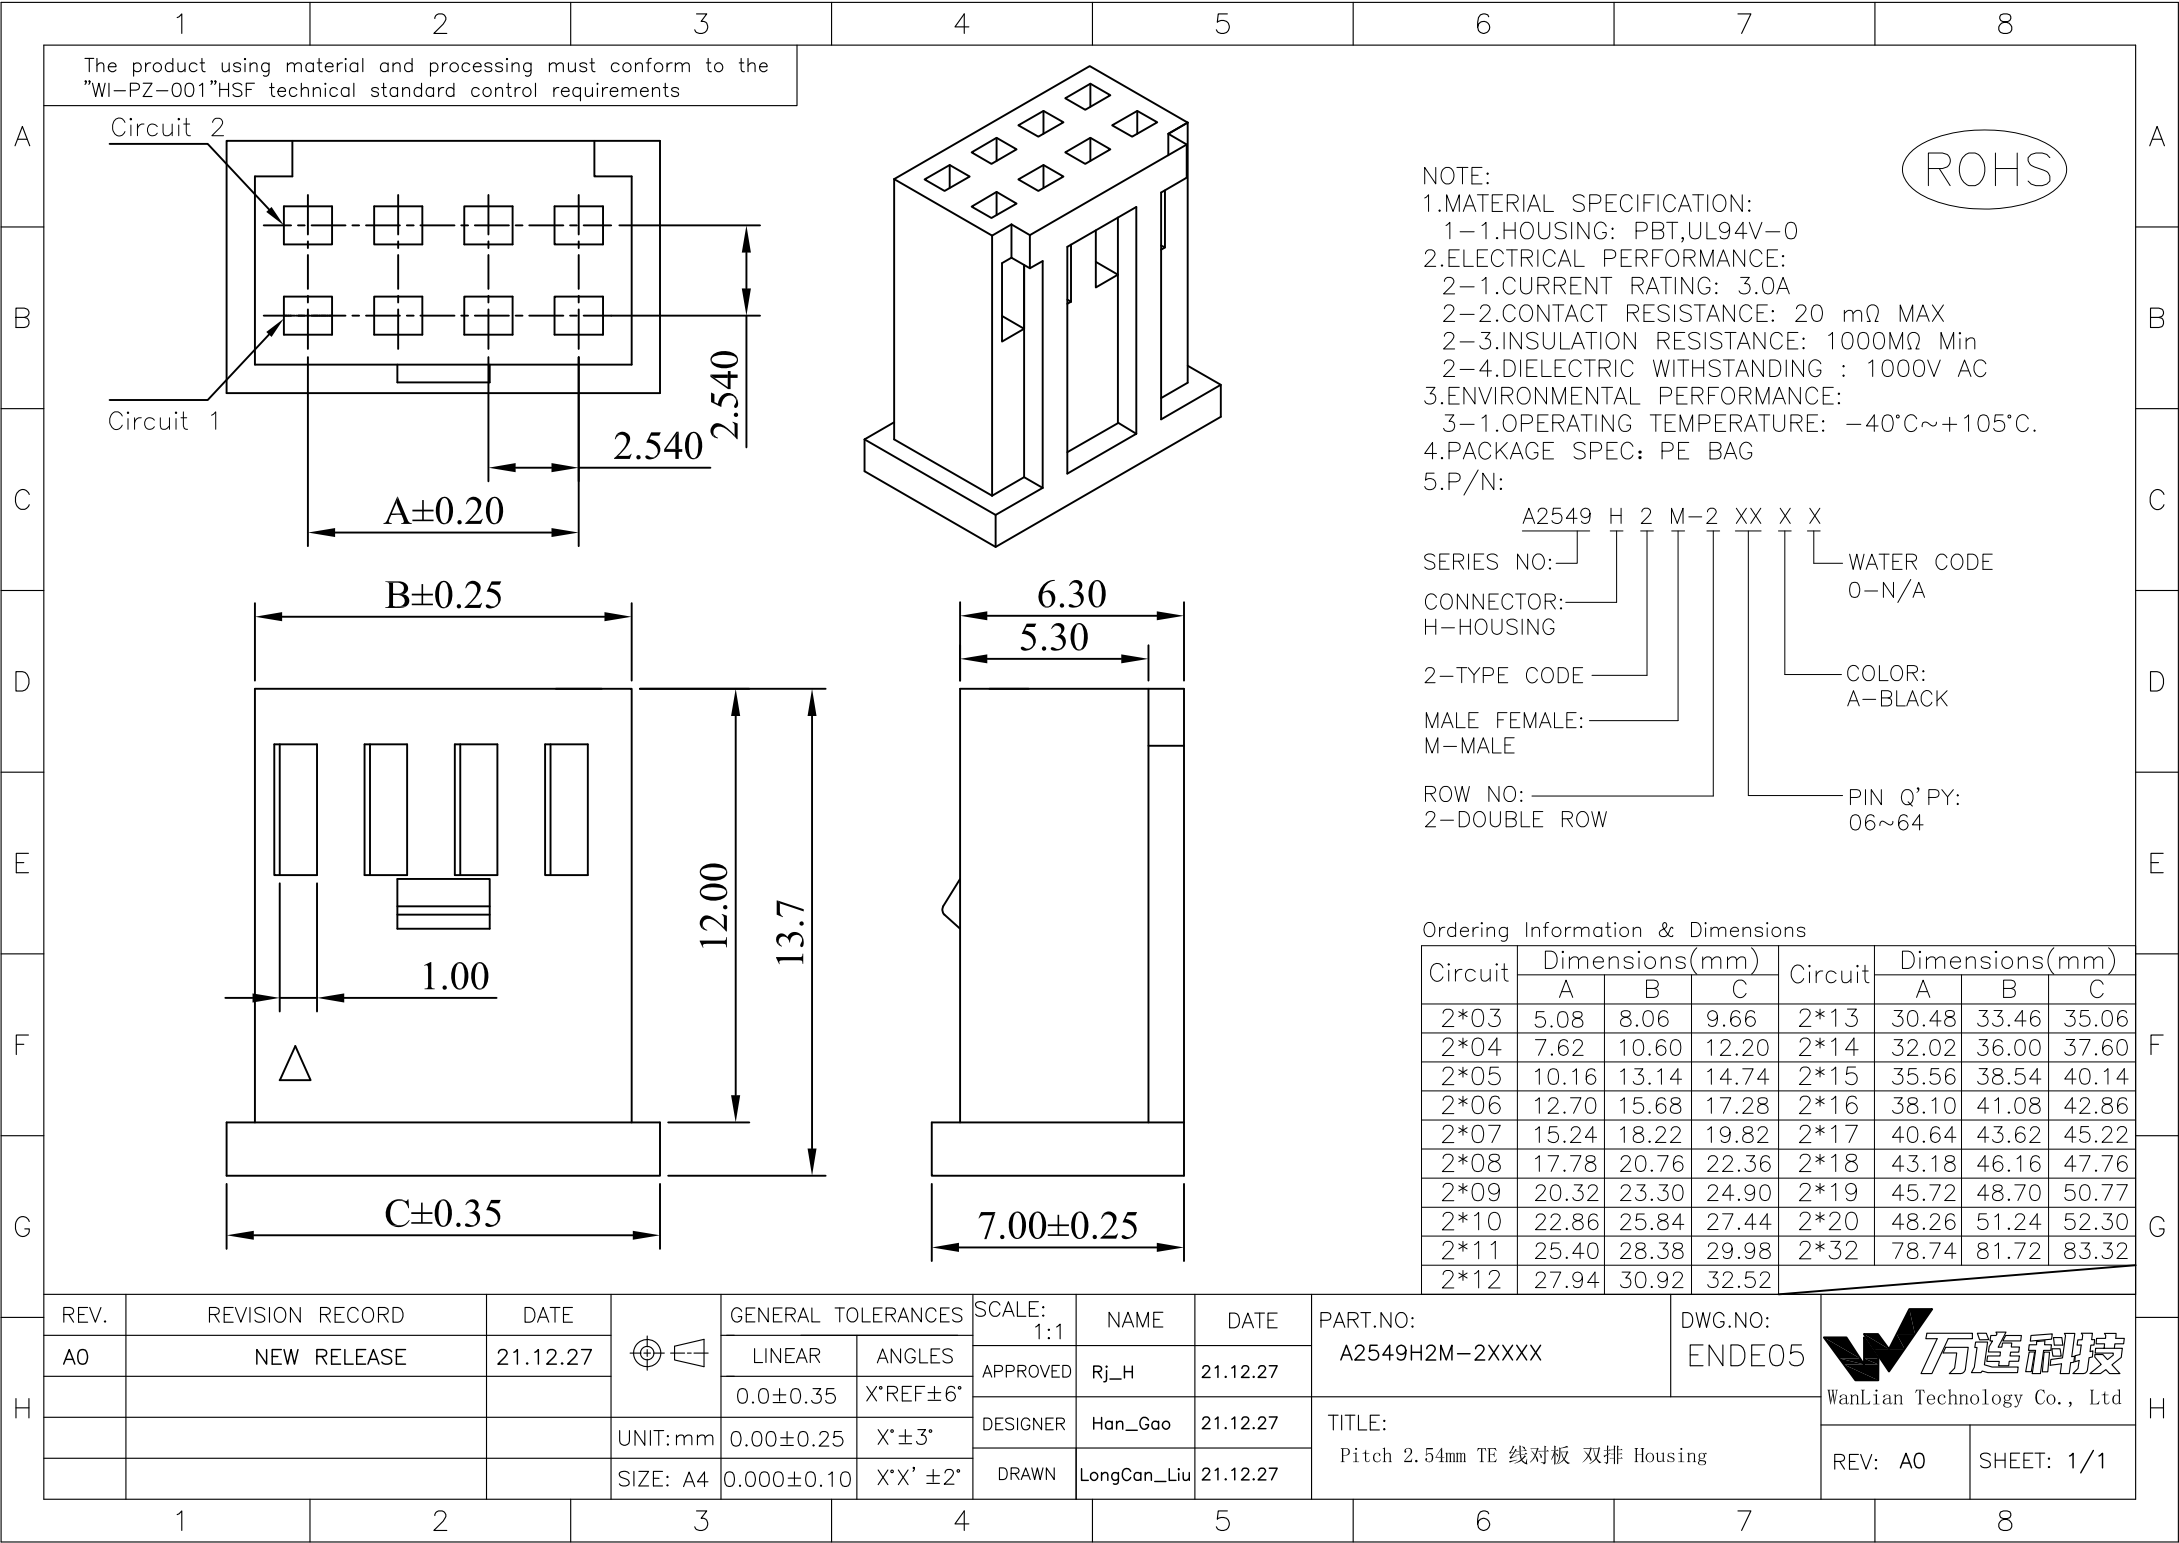

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PBT,UL94V-0
2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 3.0A
2-2.CONTACT RESISTANCE: 20 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1000V AC
3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -40°C~+105°C.
4.PACKAGE SPEC: PE BAG
5.P/N:

A2549 H 2 M-2 XX X X
SERIES NO: H-2-M-2-XX-X-X
CONNECTOR: H-2-M-2-XX-X-X
2-TYPE CODE M-2
MALE FEMALE: M-2
ROW NO: 2-DOUBLE ROW
WATER CODE 0-N/A
COLOR: A-BLACK
PIN Q'PY: 06~64

Ordering Information & Dimensions

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
2*03	5.08	8.06	9.66	2*13	30.48	33.46	35.06
2*04	7.62	10.60	12.20	2*14	32.02	36.00	37.60
2*05	10.16	13.14	14.74	2*15	35.56	38.54	40.14
2*06	12.70	15.68	17.28	2*16	38.10	41.08	42.86
2*07	15.24	18.22	19.82	2*17	40.64	43.62	45.22
2*08	17.78	20.76	22.36	2*18	43.18	46.16	47.76
2*09	20.32	23.30	24.90	2*19	45.72	48.70	50.77
2*10	22.86	25.84	27.44	2*20	48.26	51.24	52.30
2*11	25.40	28.38	29.98	2*32	78.74	81.72	83.32
2*12	27.94	30.92	32.52				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.12.27		LINEAR	ANGLES	1:1	Rj_H	21.12.27				
				0.0±0.35	X°REF±6°		DESIGNER	Han_Gao	21.12.27			
			UNIT:mm	0.00±0.25	X°±3°							
			SIZE: A4	0.000±0.10	X°X'±2°		DRAWN	LongCan_Liu	21.12.27		REV: A0	SHEET: 1/1

TITLE: Pitch 2.54mm TE 线对板 双排 Housing