
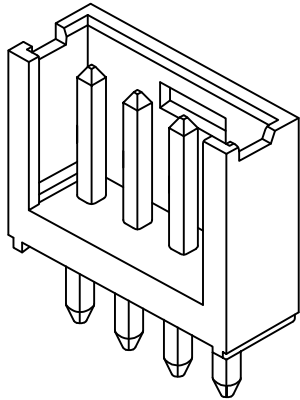
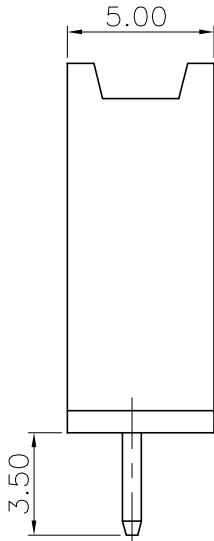
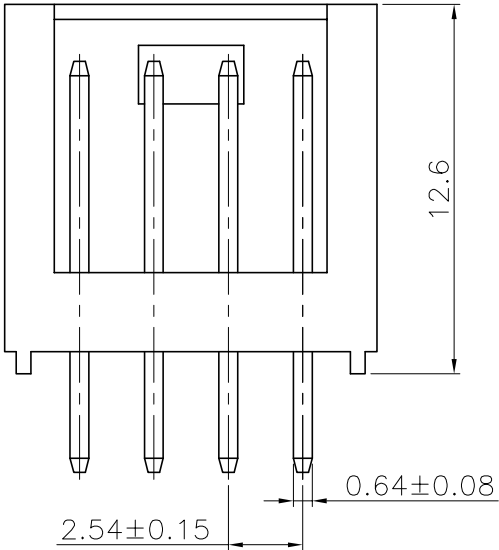
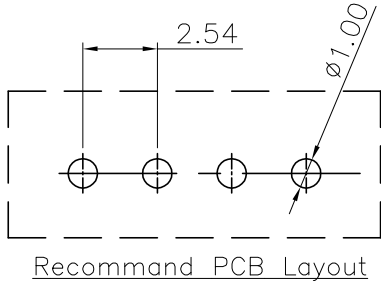


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

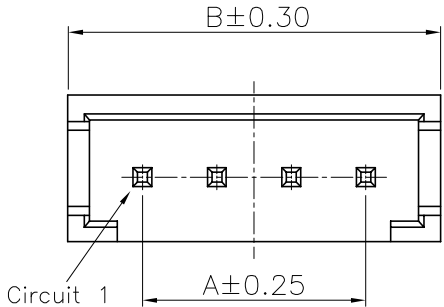

3D VIEW

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PBT,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A AC/DC
RATED VOLTAGE : 250V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

A1 A2549 W 0-1 XX 1 X X X
SERIES NO: WATER CODE
O-N/A
COLOR:
A-BLACK
CONNECTOR:
W-WAFER
ANGLE:
0-180°
ROW NO:
1-SINGLE ROW
PLATING:
C-BRIGHT TIN
PIN Q'PY:
02~22
TERMIPOINT:
1-DIP

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
02	2.54	7.62	13	30.48	35.56
03	5.08	10.16	14	33.02	38.10
04	7.62	12.70	15	35.56	40.64
05	10.16	15.24	16	38.10	43.18
06	12.70	17.78	17	40.64	45.72
07	15.24	20.32	18	43.18	48.26
08	17.78	22.86	19	45.72	50.80
09	20.32	25.40	20	48.26	53.34
10	22.86	27.94	21	50.80	55.88
11	25.40	30.48	22	53.34	58.42
12	27.94	33.02			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2549W0-1XX1XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
A0	NEW RELEASE	21.11.17		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	23.09.22	TITLE: Pitch 2.54mm 180°TE 单排立插 DIP型 Wafer		REV: A1 SHEET: 1/1
A1	PART NUMBER RENEWAL	23.09.22		0.00±0.25	X°±3°	DESIGNER	Han_Gao	23.09.22			
				0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	23.09.22			
			UNIT:mm								
			SIZE: A4								