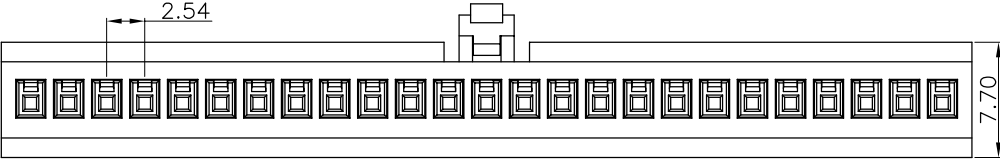
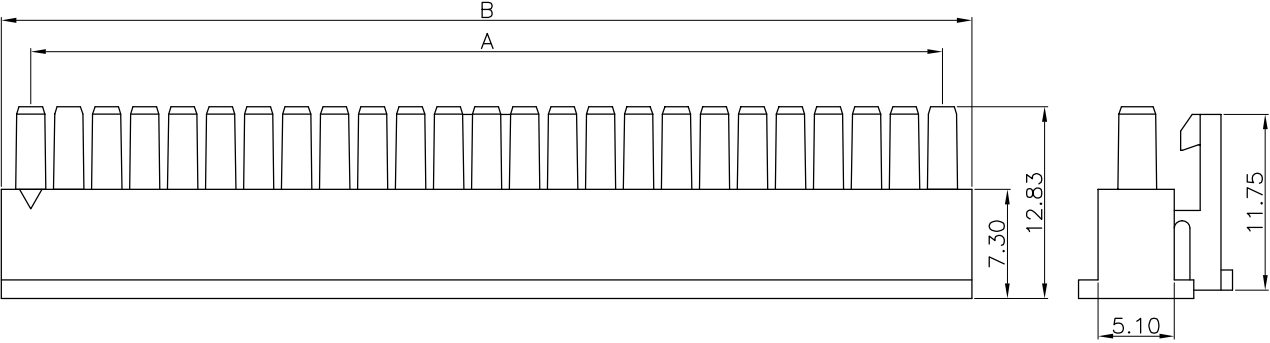
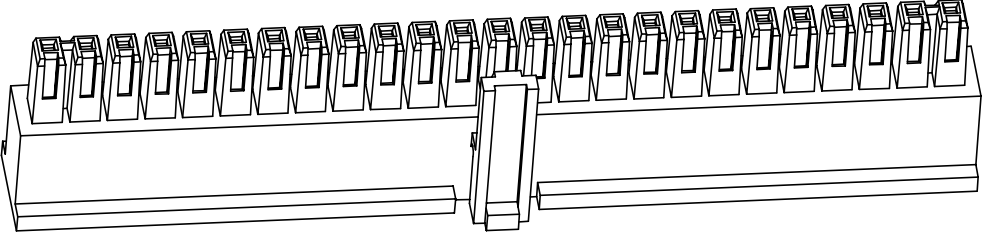


1	2	3	4	5	6	7	8																																																																																		
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																																																									
RoHS			NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PA66,UL94V-0 2.ELECTRICAL PERFORMANCE: 2-1.CURRENT RATING: 3A 2-2.CONTACT RESISTANCE: 20 mΩ MAX 2-3.INSULATION RESISTANCE: 1000MΩ Min 2-4.DIELECTRIC WITHSTANDING : 1000V AC 3.ENVIRONMENTAL PERFORMANCE: 3-1.OPERATING TEMPERATURE: -25°C~+85°C. 4.SUITABLE A254A SERIES FEMALE TERMINAL 5.PACKAGE SPEC: PE BAG 6.P/N:																																																																																						
																																																																																									
																																																																																									
																																																																																									
			<p>A254A H M-1 XX X X</p> <p>SERIES NO: WATER CODE O-N/A</p> <p>CONNECTOR: H-HOUSING</p> <p>MALE FEMALE: COLOR: M-MALE A-BLACK S-NATURE</p> <p>ROW NO: PIN Q'PY: 1-SINGLE ROW 02~13</p>																																																																																						
			<table><tr><th rowspan="2">Circuits</th><th colspan="2">Dimensions(mm)</th><th rowspan="2">Circuits</th><th colspan="2">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>A</th><th>B</th></tr><tr><td>02</td><td>2.54</td><td>6.50</td><td>14</td><td>33.02</td><td>36.96</td></tr><tr><td>03</td><td>5.08</td><td>9.02</td><td>15</td><td>35.56</td><td>39.50</td></tr><tr><td>04</td><td>7.62</td><td>11.56</td><td>16</td><td>38.10</td><td>42.04</td></tr><tr><td>05</td><td>10.16</td><td>14.10</td><td>17</td><td>40.64</td><td>44.58</td></tr><tr><td>06</td><td>12.70</td><td>16.64</td><td>18</td><td>43.18</td><td>47.12</td></tr><tr><td>07</td><td>15.24</td><td>19.18</td><td>19</td><td>45.72</td><td>49.66</td></tr><tr><td>08</td><td>17.78</td><td>21.72</td><td>20</td><td>48.26</td><td>52.20</td></tr><tr><td>09</td><td>20.32</td><td>24.26</td><td>21</td><td>50.80</td><td>54.74</td></tr><tr><td>10</td><td>22.86</td><td>26.80</td><td>22</td><td>53.34</td><td>57.28</td></tr><tr><td>11</td><td>25.40</td><td>29.34</td><td>23</td><td>55.88</td><td>59.82</td></tr><tr><td>12</td><td>27.94</td><td>31.88</td><td>24</td><td>58.42</td><td>62.36</td></tr><tr><td>13</td><td>30.48</td><td>34.42</td><td>25</td><td>60.96</td><td>64.90</td></tr></table>					Circuits	Dimensions(mm)		Circuits	Dimensions(mm)		A	B	A	B	02	2.54	6.50	14	33.02	36.96	03	5.08	9.02	15	35.56	39.50	04	7.62	11.56	16	38.10	42.04	05	10.16	14.10	17	40.64	44.58	06	12.70	16.64	18	43.18	47.12	07	15.24	19.18	19	45.72	49.66	08	17.78	21.72	20	48.26	52.20	09	20.32	24.26	21	50.80	54.74	10	22.86	26.80	22	53.34	57.28	11	25.40	29.34	23	55.88	59.82	12	27.94	31.88	24	58.42	62.36	13	30.48	34.42	25	60.96	64.90
Circuits	Dimensions(mm)		Circuits	Dimensions(mm)																																																																																					
	A	B		A	B																																																																																				
02	2.54	6.50	14	33.02	36.96																																																																																				
03	5.08	9.02	15	35.56	39.50																																																																																				
04	7.62	11.56	16	38.10	42.04																																																																																				
05	10.16	14.10	17	40.64	44.58																																																																																				
06	12.70	16.64	18	43.18	47.12																																																																																				
07	15.24	19.18	19	45.72	49.66																																																																																				
08	17.78	21.72	20	48.26	52.20																																																																																				
09	20.32	24.26	21	50.80	54.74																																																																																				
10	22.86	26.80	22	53.34	57.28																																																																																				
11	25.40	29.34	23	55.88	59.82																																																																																				
12	27.94	31.88	24	58.42	62.36																																																																																				
13	30.48	34.42	25	60.96	64.90																																																																																				
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: A254AHM-1XXXX</td><td rowspan="4">DWG.NO: ENDE05</td><td rowspan="4"> WanLian Technology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>22.09.13</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>22.09.13</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X'REF±6°</td><td>CHECK</td><td>XueZe_Ma</td><td>22.09.13</td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>0.00±0.25</td><td>X'±3°</td><td>DRAWN</td><td>LanXuan_Hou</td><td>22.09.13</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>			REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A254AHM-1XXXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	AO	NEW RELEASE	22.09.13	LINEAR	ANGLES	APPROVED	Wang_jr	22.09.13				0.0±0.35	X'REF±6°	CHECK	XueZe_Ma	22.09.13				UNIT:mm	0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.09.13				SIZE: A4	0.000±0.10	X'X' ±2°																																												
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES			SCALE: 1:1	NAME	DATE	PART.NO: A254AHM-1XXXX	DWG.NO: ENDE05				 WanLian Technology Co., Ltd																																																																										
AO	NEW RELEASE	22.09.13		LINEAR	ANGLES		APPROVED	Wang_jr	22.09.13																																																																																
				0.0±0.35	X'REF±6°		CHECK	XueZe_Ma	22.09.13																																																																																
				UNIT:mm	0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.09.13																																																																																
			SIZE: A4	0.000±0.10	X'X' ±2°																																																																																				
1	2	3	4	5	6	7	8																																																																																		