
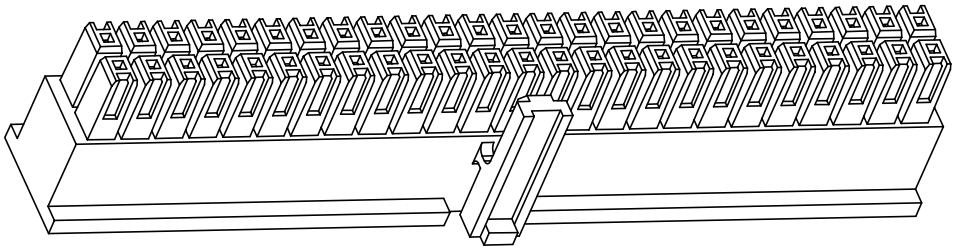

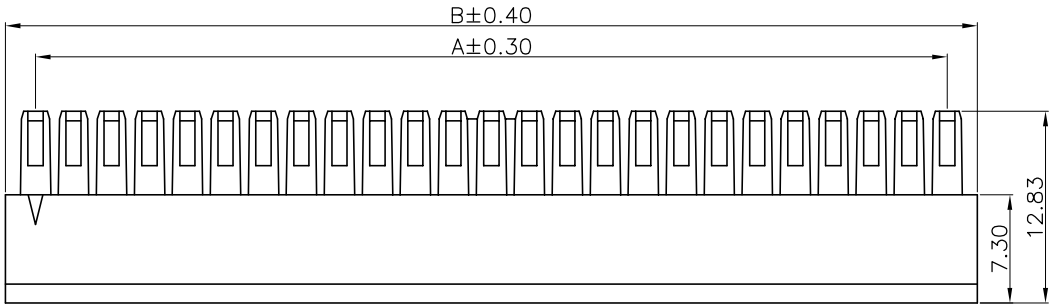


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

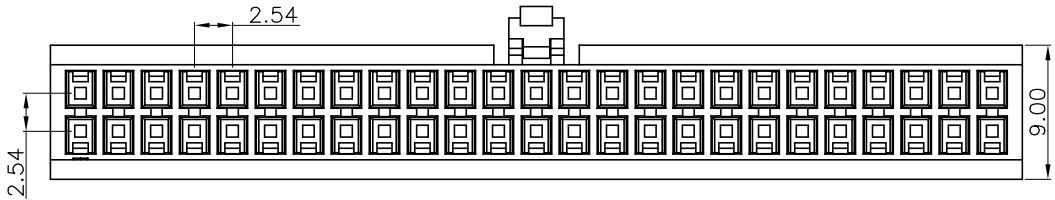

NOTE:  
1.MATERIAL SPECIFICATION:  
1-1.HOUSING: PA66,UL94V-0  
2.ELECTRICAL PERFORMANCE:  
2-1.CURRENT RATING: 3A  
2-2.CONTACT RESISTANCE: 20 mΩ MAX  
2-3.INSULATION RESISTANCE: 1000MΩ Min  
2-4.DIELECTRIC WITHSTANDING : 1000V AC  
3.ENVIRONMENTAL PERFORMANCE:  
3-1.OPERATING TEMPERATURE: -25°C~+85°C.  
4.SUITABLE A254A SERIES FEMALE TERMINAL  
5.PACKAGE SPEC: PE BAG  
6.P/N: A254A H M-2 XX X X  
SERIES NO: WATER CODE  
CONNECTOR: H-HOUSING 0-N/A  
MALE FEMALE: COLOR:  
M-MALE A-BLACK  
S-NATURE  
ROW NO: PIN Q'PY:  
2-DOUBLE ROW 04~26

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2*02	2.54	6.50	14	33.02	36.96
2*03	5.08	9.02	15	35.56	39.50
2*04	7.62	11.56	16	38.10	42.04
2*05	10.16	14.10	17	40.64	44.58
2*06	12.70	16.64	18	43.18	47.12
2*07	15.24	19.18	19	45.72	49.66
2*08	17.78	21.72	20	48.26	52.20
2*09	20.32	24.26	21	50.80	54.74
2*10	22.86	26.80	22	53.34	57.28
2*11	25.40	29.34	23	55.88	59.82
2*12	27.94	31.88	24	58.42	62.36
2*13	30.48	34.42	25	60.96	64.90

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A254AHM-2XXXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.09.13		LINEAR	ANGLES	APPROVED	Wang_jr	22.09.13			
				0.0±0.35	X°REF±6°				CHECK	XueZe_Ma	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou			
			SIZE: A4	0.000±0.10	X°X° ±2°	TITLE: Pitch 2.54mm DOUBLE ROW HOUSING				REV: A0	SHEET: 1/1