


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

A

A

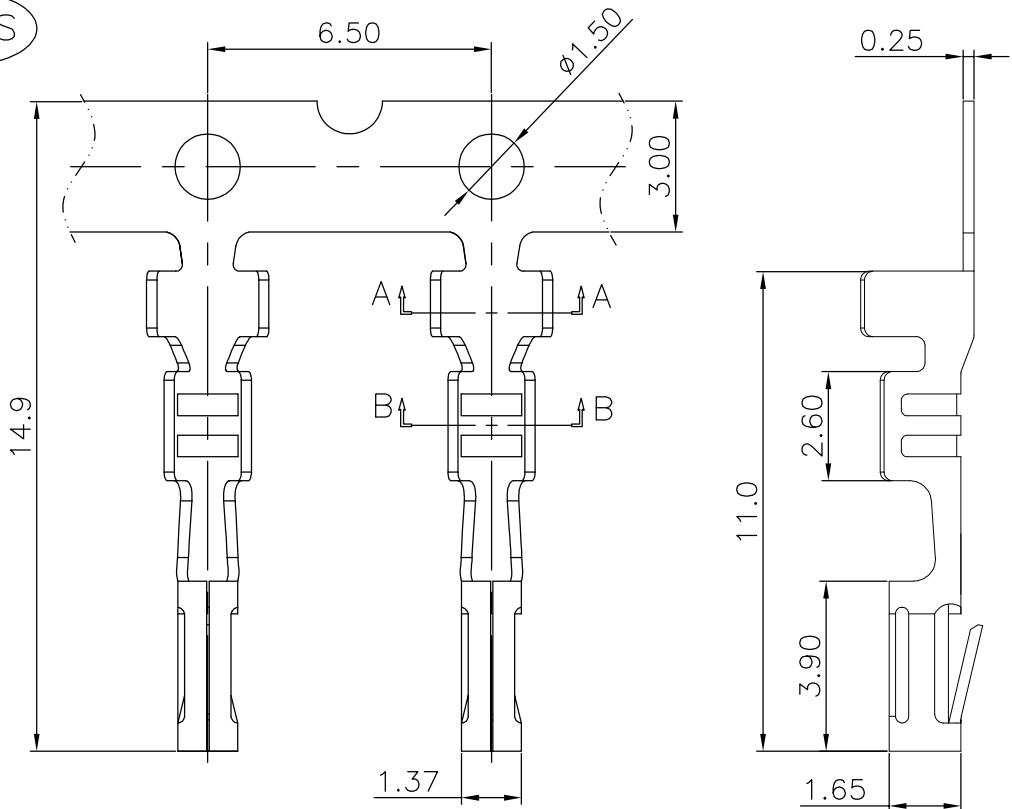

RoHS



NOTE:  
1.MATERIAL SPECIFICATION:  
1-1.TERMINAL: PHOSPHOR BRONZE  
2.PLATING SPECIFICATION:  
2-1.TERMINAL:  
TIN/GOLD FLASH PLATED OVER ALL.  
3.ELECTRICAL PERFORMANCE:  
3-1.CURRENT RATING: 3A  
3-2.CONTACT RESISTANCE: 20 mΩ MAX  
3-3.INSULATION RESISTANCE: 1000MΩ Min  
3-4.DIELECTRIC WITHSTANDING : 1000V AC  
4.ENVIRONMENTAL PERFORMANCE:  
4-1.OPERATING TEMPERATURE: -25°C~+85°C.  
5.PACKAGE SPEC : REEL  
6.SUITABLE A254A SERIES MALE HOUSING.  
7.P/N:

A254A T 1 F X-X  
SERIES NO: \_\_\_\_\_  
CONNECTOR: \_\_\_\_\_  
T-TERMINAL  
TYPE CODE \_\_\_\_\_  
MALE FEMALE: \_\_\_\_\_  
F-FEMALE  
M-MALE  
PLATING:  
1- G/F  
C-BRIGHT TIN  
METAL:  
P-PHOSPHOR BRONZE  
B-BRASS

Wire range	Insulation O.D
#20~#24	1.55 mm (Max)

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A254AT1FX-X		DWG.NO: ENDE05		 WanLian Technology Co., Ltd		H				
	AO		NEW RELEASE		22.09.13			LINEAR	ANGLES	APPROVED	Wang_jr	22.09.13											
							0.0±0.35	X°REF±6°															
							UNIT:mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.09.13	TITLE: Pitch 2.54mm TERMINAL										
							SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.09.13											
1			2			3			4			5			6			7			8		