




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

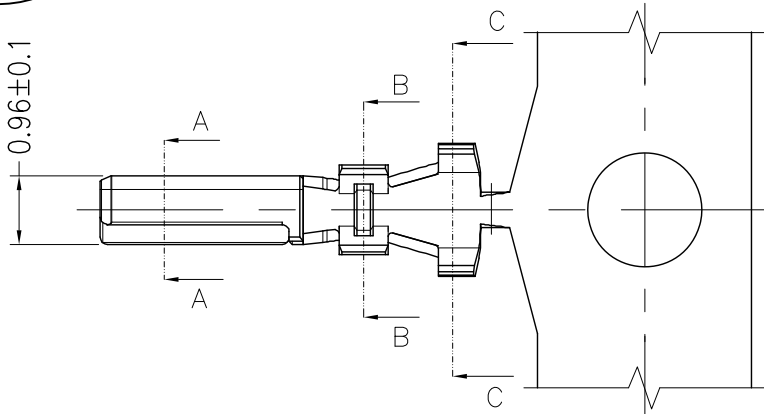


SECTION A-A

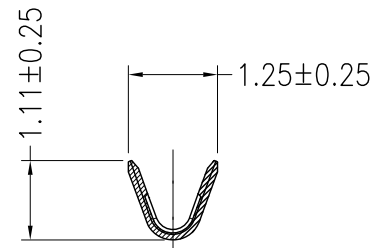

SECTION B-B

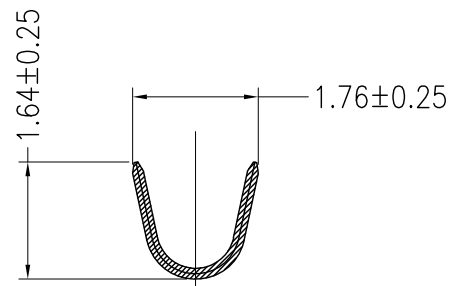

SECTION C-C

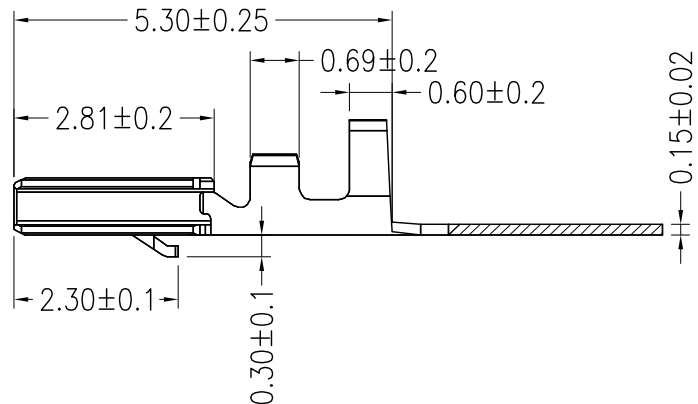

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 0.2kgf/PIN MIN
3-2.DURABILITY: 30 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 500V AC/DC
4-2.CONTACT RESISTANCE: 40 mΩ MAX
4-3.INSULATION RESISTANCE: 1000 MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC: REEL
7.P/N: A3701 T F X-X
SERIES NO: _____
CONNECTOR: _____
T-TERMINAL _____
MALE FEMALE: _____
F-FEMALE _____
PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD		DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A3701TFX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
	AO	NEW RELEASE			LINEAR	ANGLES							
					0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.10.12				
					0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch3.7mm MX Terminal AWG #26 -#28			
					0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.10.12			REV: A0	SHEET: 1/1

1

2

3

4

5

6

7

8