


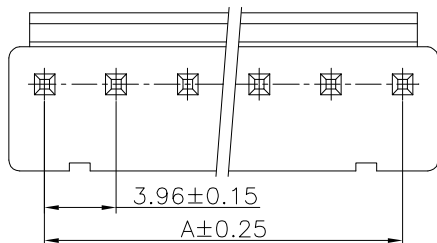
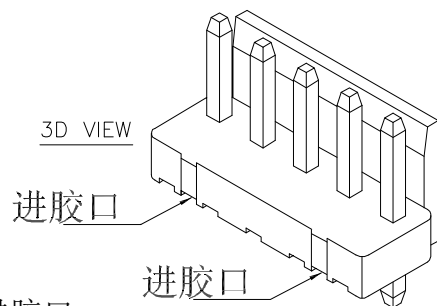
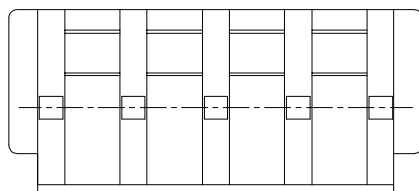


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

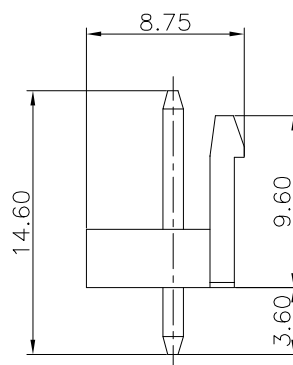

P.C.B LAYOUT

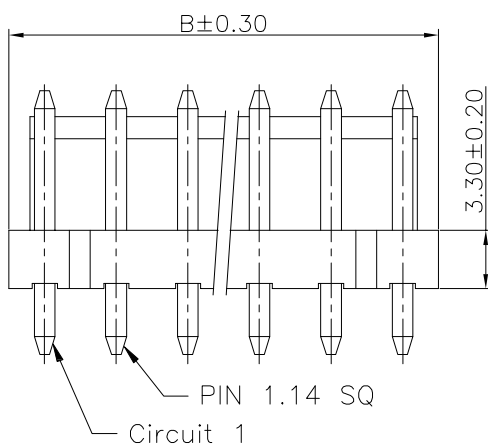

备注：2P为1个进胶口，
3P和3P以上为2个进胶口

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 7A AC/DC
RATED VOLTAGE : 250V AC/DC
3-2.CONTACT RESISTANCE: 10 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1500V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

SERIES NO: A3962 W 0 1-1 XX 1 X X X
CONNECTOR: W-WAFER
ANGLE: 0-180°
TYPE: 1-TYPE 1
ROW NO: 1-SINGLE ROW
PIN Q'PY: 02~15
WATER CODE: 0-N/A
COLOR: A-BLACK S-NATURE
PLATING: C-BRIGHE TIN
TERMIPOINT: 1-DIP

Ordering Information & Dimensions

Circuit	Dimensions		Circuit	Dimensions	
	A	B		A	B
02	3.96	7.92	09	31.68	35.64
03	7.92	11.88	10	35.64	39.60
04	11.88	15.84	11	39.60	43.56
05	15.84	19.80	12	43.56	47.52
06	19.80	23.76	13	47.52	51.48
07	23.76	27.72	14	51.48	55.44
08	27.72	31.68	15	55.44	59.40

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.14	A3962W01-1XX1XXX	ENDE05	
A1	Housing color removes the K choose	23.03.23	UNIT:mm	0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	23.09.14	TITLE: Pitch 3.96mm 180° 单排卧插 直背 Wafer	REV: A2	SHEET: 1/1
A2	PART NUMBER RENEWAL	23.09.14		0.00±0.25	X'±3°	DRAWN	LX_HOU	23.09.14			
			SIZE: A4	0.000±0.10	X'X' ±2°						