


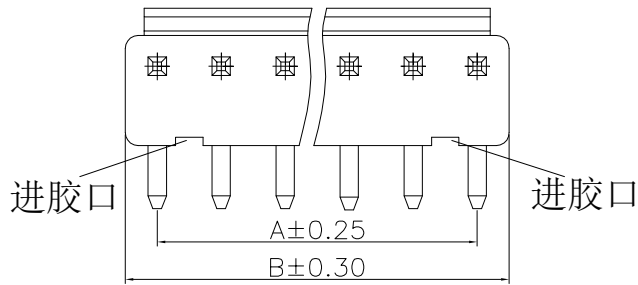
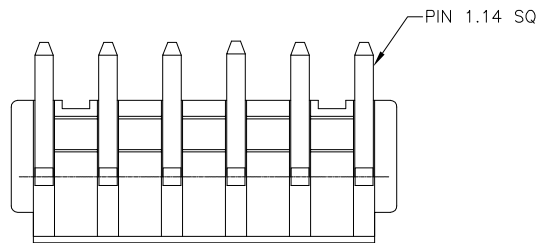


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

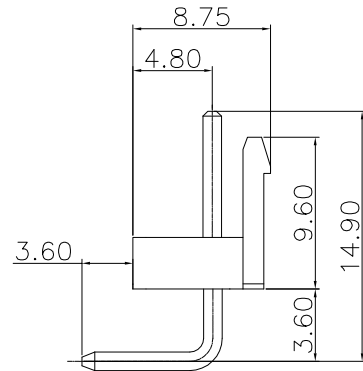

P. C. B LAYOUT

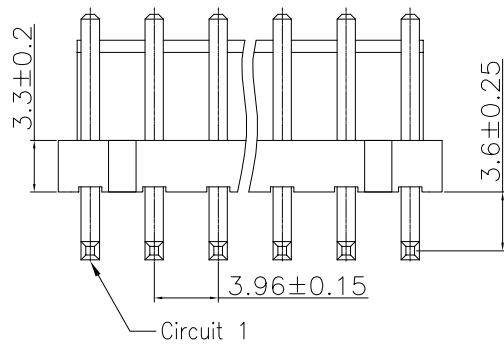

备注：2P为1个进胶口，
3P和3P以上为2个进胶口

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA66,UL94V-0

1-2.CONTACTS: BRASS

1-3.SOLDER TABS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

TIN/GOLD FLASH PLATED OVER ALL.

2-2.SOLDER TABS:

TIN/GOLD FLASH PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 7A AC/DC

RATED VOLTAGE : 250V AC/DC

3-2.CONTACT RESISTANCE: 10 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 1500V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -25°C~+85°C.

5.PACKAGE SPEC: PE BAG

6.P/N:

A2 A3962 W 9-1 XX 1 X X X
SERIES NO: WATER CODE
0-N/A
CONNECTOR: W-WAFER
COLOR:
A-BLACK
S-NATURE
ANGLE: 9-90°
0-180°
ROW NO: 1-SINGLE ROW
PLATING:
C-BRIGHT TIN
PIN Q'PY: 02~15
TERMIPOINT:
1-DIP

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	3.96	7.92	09	31.68	35.64
03	7.92	11.88	10	35.64	39.60
04	11.88	15.84	11	39.60	43.56
05	15.84	19.80	12	43.56	47.52
06	19.80	23.76	13	47.52	51.48
07	23.76	27.72	14	51.48	55.44
08	27.72	31.68	15	55.44	59.40

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A3962W9-1XX1XXX	DWG.NO: ENDE05	TITLE: Pitch 3.96mm 90° 高弯 单排卧插 直背 Wafer	REV: A2	SHEET: 1/1
				LINEAR	ANGLES								
A0	NEW RELEASE	21.11.17	⌀	0.0±0.35	X°REF±6°	APPROVED	Wang_jr	23.09.14					
A1	Housing color removes the K choose	23.03.23	SIZE: A4	0.00±0.25	X°±3°	DESIGNER	Han_Gao	23.09.14					
A2	PART NUMBER RENEWAL	23.09.14		0.000±0.10	X°X'±2°	DRAWN	LX_HOU	23.09.14					

万进科技
WanLian Technology Co., Ltd