
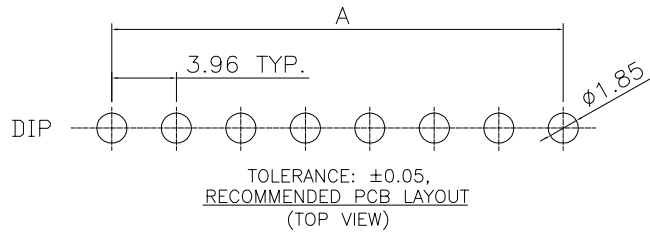
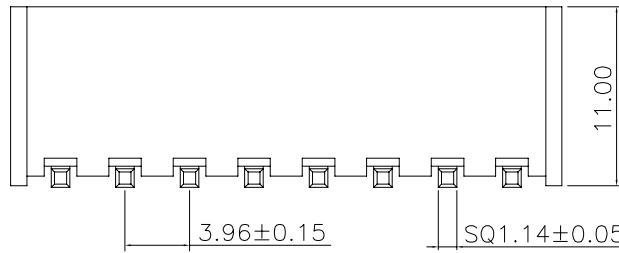



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

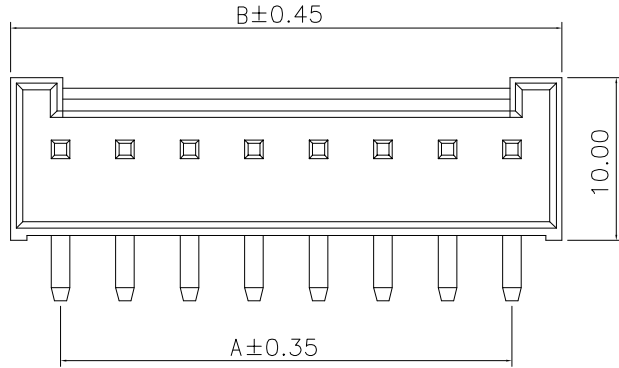

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
 - 1-2.CONTACTS: BRASS
 - 1-3.SOLDER TABS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - 2-2.SOLDER TABS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 7A AC/DC
RATED VOLTAGE : 250V AC/DC
 - 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

A1 **A3962** **W** **9** **8-1** **XX** **1** **X** **X** **X**
SERIES NO: _____
CONNECTOR: _____
W-WAFER
ANGLE: _____
9-90°
TYPE: _____
8-TYPE 8
ROW NO: _____
1-SINGLE ROW
PIN Q'PY: _____
02~10
WATER CODE
0-N/A
COLOR:
A-BLACK
S-NATURE
PLATING:
C-BRIGHT TIN
TERMIPOINT:
1-DIP

Ordering Information & Dimensions

Circuit	Dimensions		Circuit	Dimensions	
	A	B		A	B
02P	3.96	10.10	07P	23.76	29.90
03P	7.92	14.06	08P	27.72	33.86
04P	11.88	18.02	09P	31.68	37.82
05P	15.84	21.98	10P	35.64	41.78
06P	19.80	25.94			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A3962W98-1XX1XXX	DWG.NO: ENDE05	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.14			
A1	PART NUMBER RENEWAL	23.09.14		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.09.14			
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	LX_HOU	23.09.14	TITLE: Pitch 3.96mm 90° 单排卧插 Wafer		
			SIZE: A4	0.000±0.10	X°X' ±2°						
REV: A1 SHEET: 1/1											