



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS


Circuit 1

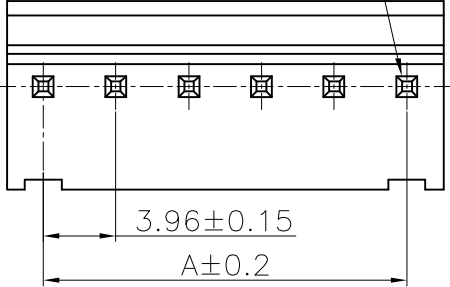


B±0.25

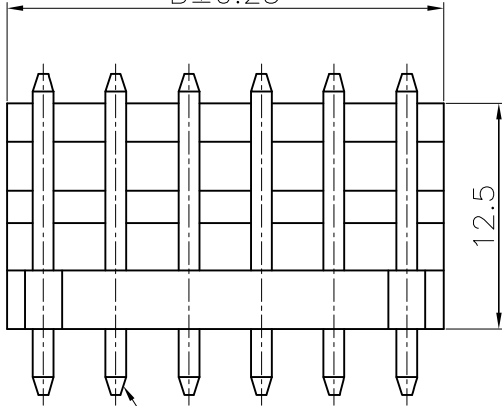

PIN 1.14 SQ

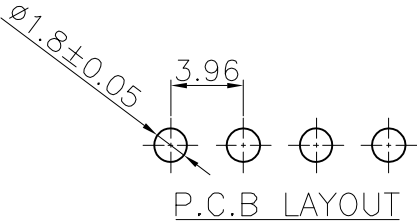


进胶口

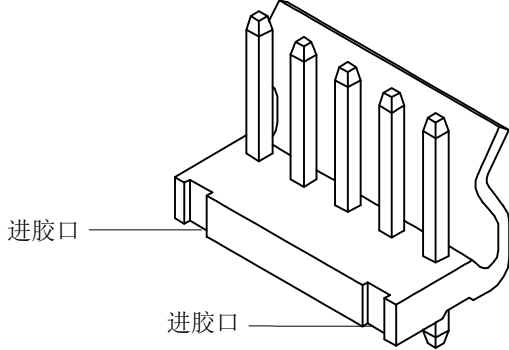

进胶口

注：2P 3P为一个进胶口处于中间位置，3P以上两个进胶口

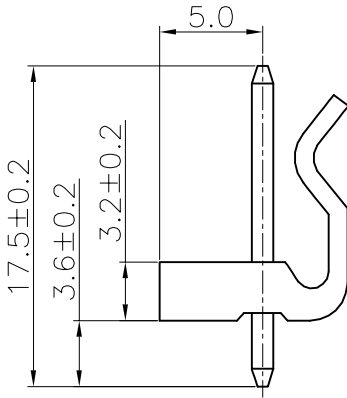

NOTE:

1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66 UL94V-2
1-2.CONTACTS: BRASS
1-3.SOLDER TABS: BRASS

2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
2-2.SOLDER TABS:
TIN/GOLD FLASH PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 7A AC/DC
RATED VOLTAGE : 250V AC/DC
3-2.CONTACT RESISTANCE: 10 mΩ MAX
3-3.INSULATION RESISTANCE: 100MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1500V

4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.

5.PACKAGE SPEC:PE BAG

6.P/N:

A3963

W

0-1

XX

1

X

X

X

SERIES NO:

CONNECTOR:
W-WAFER

ANGLE:
0-180°

ROW NO:
1-SINGLE ROW

PIN Q' PY:
02~20

WATER CODE
0-N/A

COLOR:
A-BLACK
S-NATURE

PLATING:
C-BRIGHT TIN

TERMIPOINT:
1-DIP

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	3.96	7.92	12	43.56	47.52
03	7.92	11.88	13	47.52	51.48
04	11.88	15.84	14	51.48	55.44
05	15.84	19.80	15	55.44	59.40
06	19.80	23.76	16	59.40	63.36
07	23.76	27.72	17	63.36	67.32
08	27.72	31.68	18	67.32	71.28
09	31.68	35.64	19	71.28	75.24
10	35.64	39.60	20	75.24	79.20
11	39.60	43.56			

REV.

REVISION RECORD

DATE

A0

NEW RELEASE

21.11.17

A1

PART NUMBER RENEWAL

23.09.18



GENERAL TOLERANCES

SCALE: 1:1

NAME

DATE

PART.NO:

A3963W0-1XX1XXX

DWG.NO:

ENDE05

UNIT:mm

0.00±0.25

X'±3°

DESIGNER

Han_Gao

23.09.18

TITLE:

Pitch 3.96mm 180° 单排卧插 Wafer

SIZE: A4

0.000±0.10

X'X' ±2°

DRAWN

Zijun_Huang

23.09.18



WanLian Technology Co., Ltd

REV: A1

SHEET: 1/1

12345678